


# Mobile Communications

## Chapter 2: Wireless Transmission

- Frequencies
- Signals
- Antennas
- Signal propagation
- Multiplexing
- Spread spectrum
- Modulation
- Cellular systems



# Frequencies for communication

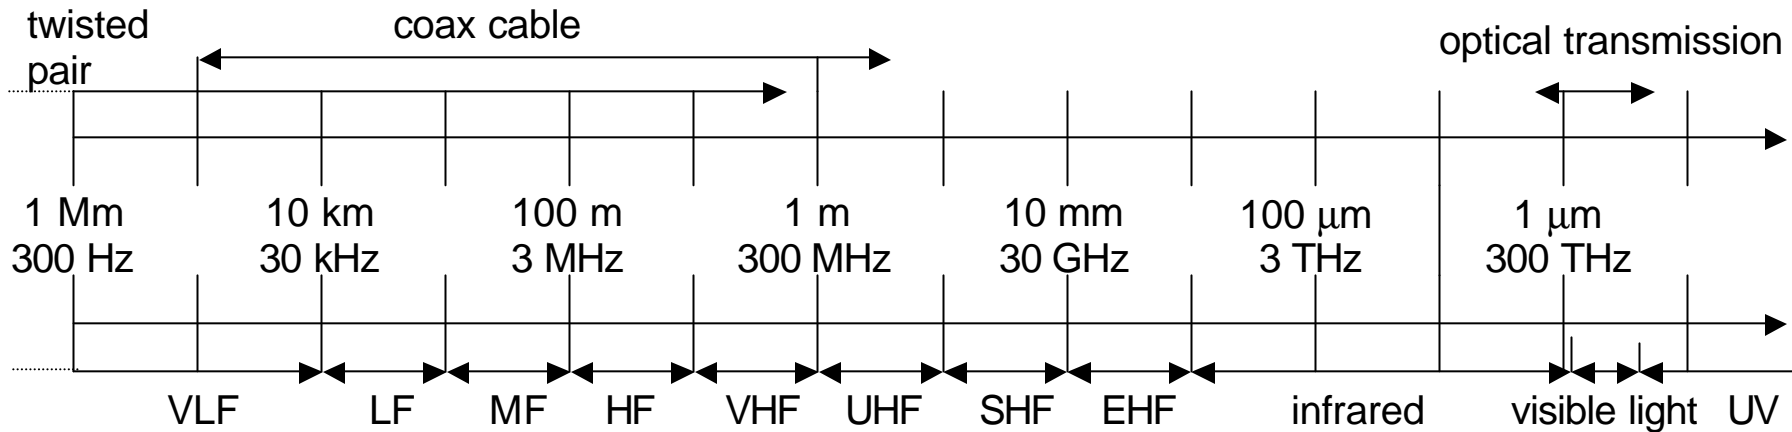

VLF = Very Low Frequency  
 LF = Low Frequency  
 MF = Medium Frequency  
 HF = High Frequency  
 VHF = Very High Frequency

UHF = Ultra High Frequency  
 SHF = Super High Frequency  
 EHF = Extra High Frequency  
 UV = Ultraviolet Light

Frequency and wave length:

$$\lambda = c/f$$

wave length  $\lambda$ , speed of light  $c \cong 3 \times 10^8 \text{m/s}$ , frequency  $f$



# Frequencies for mobile communication

- ❑ VLF, LF, MF HF not used for wireless
- ❑ VHF-/UHF-ranges for mobile radio
  - ❑ simple, small antenna for cars
  - ❑ deterministic propagation characteristics, reliable connections
- ❑ SHF and higher for directed radio links, satellite communication
  - ❑ small antenna, beam forming
  - ❑ large bandwidth available
- ❑ Wireless LANs use frequencies in UHF to SHF range
  - ❑ some systems planned up to EHF
  - ❑ limitations due to absorption by water and oxygen molecules (resonance frequencies)
    - weather dependent fading. E.g signal loss caused by heavy rain



# Frequencies and regulations

ITU-R holds auctions for new frequencies, manages frequency bands worldwide (WRC, World Radio Conferences)

	Europe	USA	Japan
<b>Cellular Phones</b>	<b>GSM</b> 450-457, 479-486/460-467, 489-496, 890-915/935-960, 1710-1785/1805-1880 <b>UMTS (FDD)</b> 1920-1980, 2110-2190 <b>UMTS (TDD)</b> 1900-1920, 2020-2025	<b>AMPS, TDMA, CDMA</b> 824-849, 869-894 <b>TDMA, CDMA, GSM</b> 1850-1910, 1930-1990	<b>PDC</b> 810-826, 940-956, 1429-1465, 1477-1513
<b>Cordless Phones</b>	<b>CT1+</b> 885-887, 930-932 <b>CT2</b> 864-868 <b>DECT</b> 1880-1900	<b>PACS</b> 1850-1910, 1930-1990 <b>PACS-UB</b> 1910-1930	<b>PHS</b> 1895-1918 <b>JCT</b> 254-380
<b>Wireless LANs</b>	<b>IEEE 802.11</b> 2400-2483 <b>HIPERLAN 2</b> 5150-5350, 5470-5725	902-928 <b>IEEE 802.11</b> 2400-2483 5150-5350, 5725-5825	<b>IEEE 802.11</b> 2471-2497 5150-5250
<b>Others</b>	<b>RF-Control</b> 27, 128, 418, 433, 868	<b>RF-Control</b> 315, 915	<b>RF-Control</b> 426, 868



# Signals I


- ❑ physical representation of data
- ❑ function of time and location
- ❑ signal parameters: parameters representing the value of data
- ❑ classification
  - ❑ continuous time/discrete time
  - ❑ continuous values/discrete values
  - ❑ analog signal = continuous time and continuous values
  - ❑ digital signal = discrete time and discrete values
- ❑ signal parameters of periodic signals:  
period  $T$ , frequency  $f=1/T$ , amplitude  $A$ , phase shift  $\varphi$ 
  - ❑ sine wave as special periodic signal for a carrier:

$$s(t) = A_t \sin(2 \pi f_t t + \varphi_t)$$





# Fourier representation of periodic signals

$$g(t) = \frac{1}{2}c + \sum_{n=1}^{\infty} a_n \sin(2pnft) + \sum_{n=1}^{\infty} b_n \cos(2pnft)$$

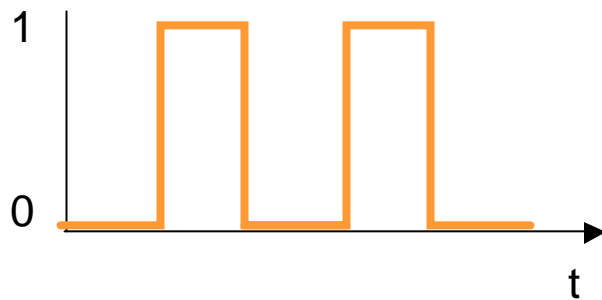


ideal periodic signal

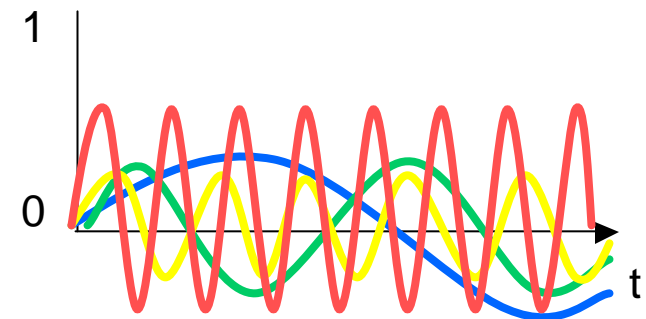

real composition  
(based on harmonics)



# Fourier Transforms and Harmonics


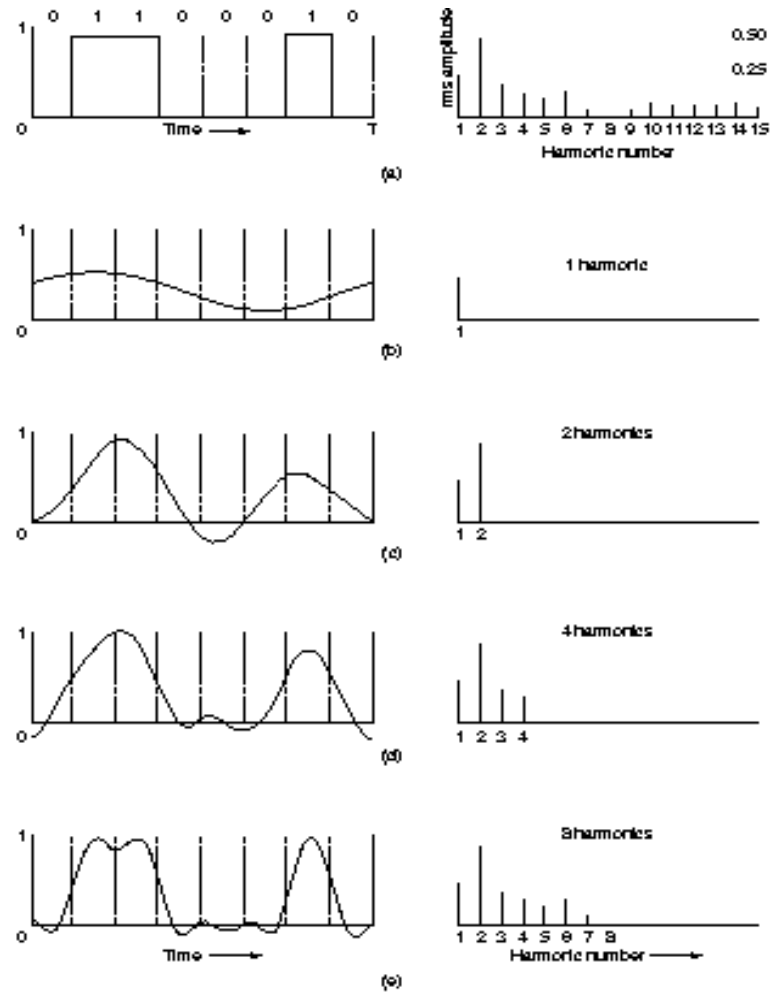


**Fig. 2-1.** (a) A binary signal and its root-mean-square Fourier amplitudes. (b)-(e) Successive approximations to the original signal.



# Signals II

- Different representations of signals
  - amplitude (amplitude domain)
  - frequency spectrum (frequency domain)
  - phase state diagram (amplitude  $M$  and phase  $\varphi$  in polar coordinates)

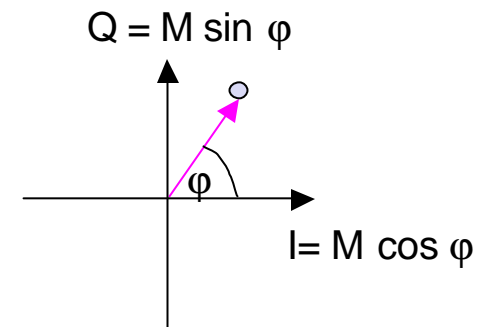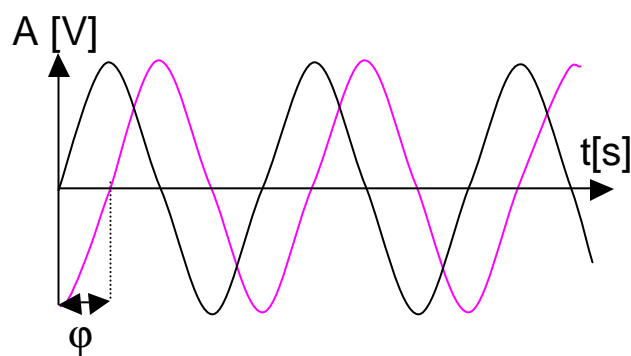



- Composed signals transferred into frequency domain using Fourier transformation
- Digital signals need
  - infinite frequencies for perfect transmission
  - modulation with a carrier frequency for transmission (analog signal!)





# Antennas: isotropic radiator

- ❑ Radiation and reception of electromagnetic waves, coupling of wires to space for radio transmission
- ❑ Isotropic radiator: equal radiation in all directions (three dimensional) - only a theoretical reference antenna
- ❑ Real antennas always have directive effects (vertically and/or horizontally)
- ❑ Radiation pattern: measurement of radiation around an antenna

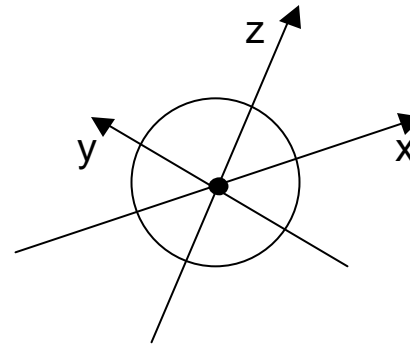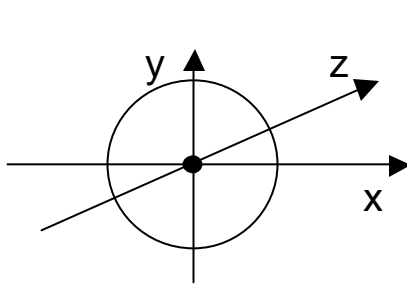


ideal  
isotropic  
radiator




# Antennas: simple dipoles


- Real antennas are not isotropic radiators but, e.g., dipoles with lengths  $\lambda/4$  on car roofs or  $\lambda/2$  as Hertzian dipole  
 → shape of antenna proportional to wavelength

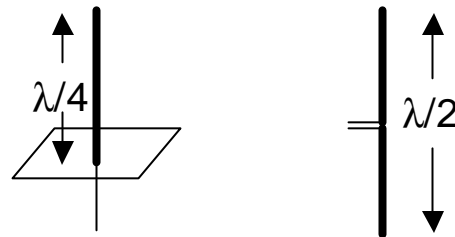


- Example: Radiation pattern of a simple Hertzian dipole

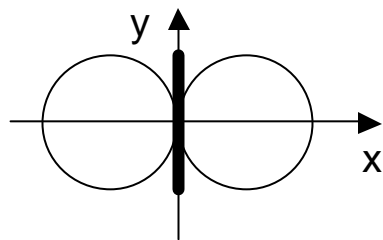

side view (xy-plane)

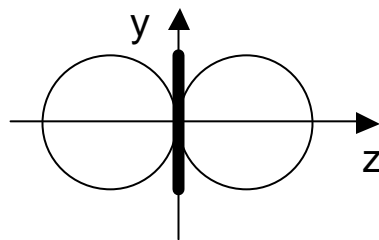

side view (yz-plane)

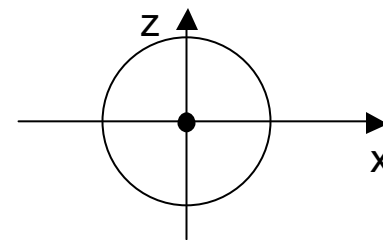

top view (xz-plane)


simple  
dipole

- Gain: maximum power in the direction of the main lobe compared to the power of an isotropic radiator (with the same average power)




# Antennas: directed and sectorized


Often used for microwave connections or base stations for mobile phones  
 (e.g., radio coverage of a valley)

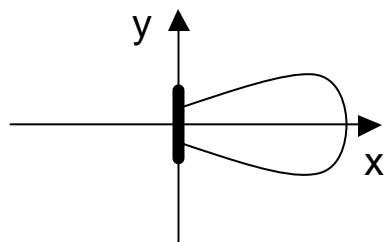

side view (xy-plane)

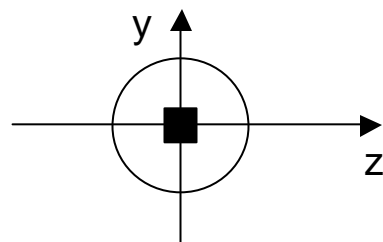


side view (yz-plane)

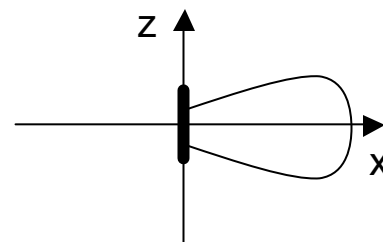


top view (xz-plane)

directed  
 antenna

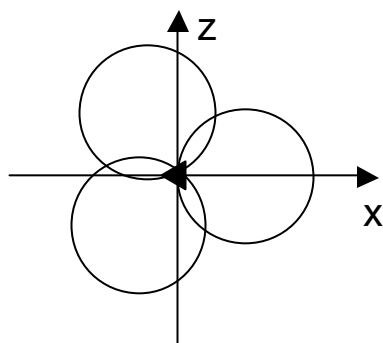

top view, 3 sector

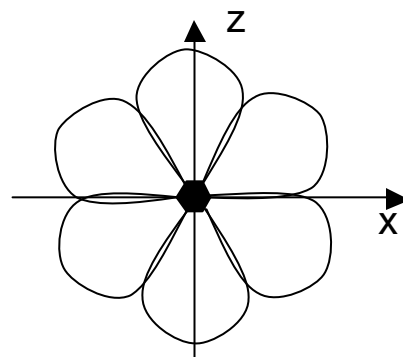



top view, 6 sector

sectorized  
 antenna



# Antennas: diversity

- Grouping of 2 or more antennas
  - multi-element antenna arrays
- Antenna diversity
  - switched diversity, selection diversity
    - receiver chooses antenna with largest output
  - diversity combining
    - combine output power to produce gain
    - cophasing needed to avoid cancellation

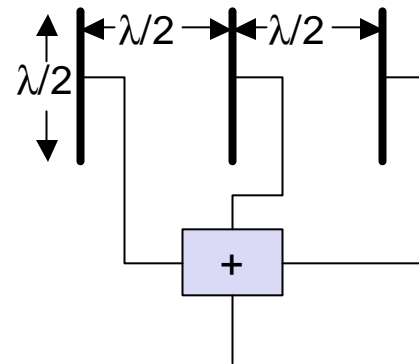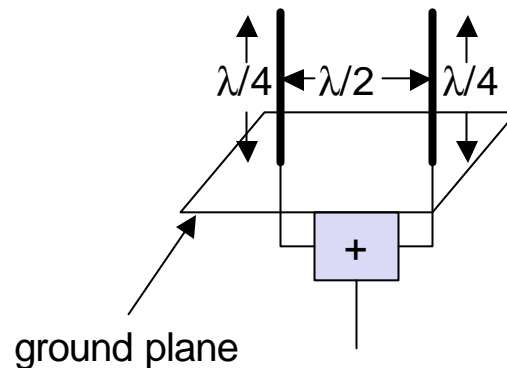

# Signal propagation ranges

## Transmission range


- ❑ communication possible
- ❑ low error rate

## Detection range

- ❑ detection of the signal possible
- ❑ no communication possible

## Interference range

- ❑ signal may not be detected
- ❑ signal adds to the background noise

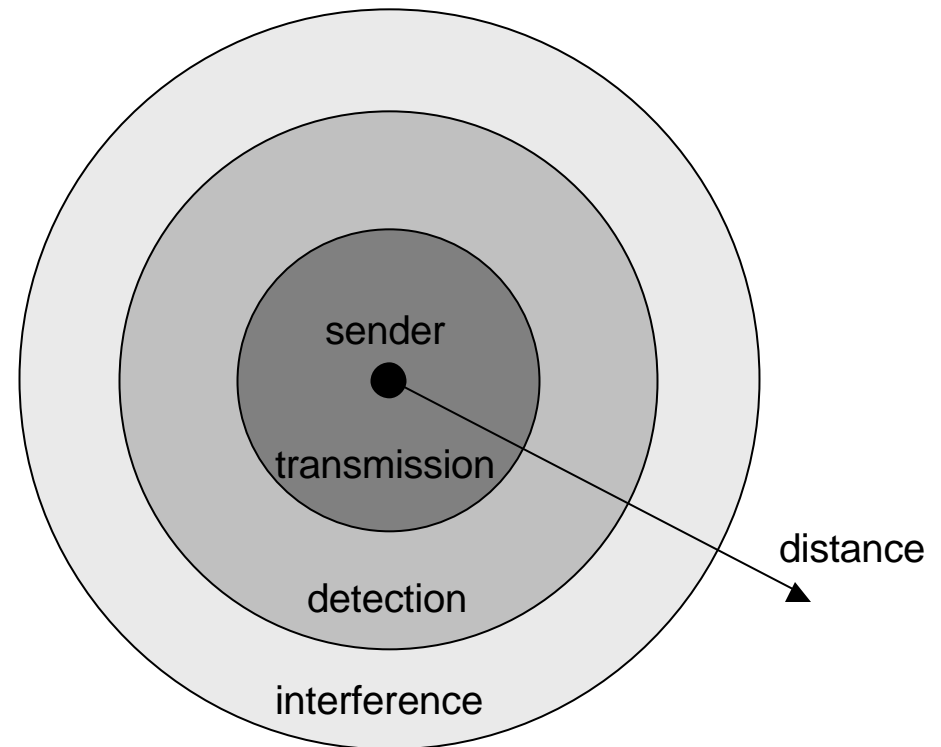


# Signal propagation

Propagation in free space always like light (straight line)


Receiving power proportional to  $1/d^2$  in vacuum – much more in real environments  
( $d$  = distance between sender and receiver)

Receiving power additionally influenced by


- ❑ fading (frequency dependent)
- ❑ shadowing
- ❑ reflection at large obstacles
- ❑ refraction depending on the density of a medium
- ❑ scattering at small obstacles
- ❑ diffraction at edges



shadowing




reflection



refraction






scattering

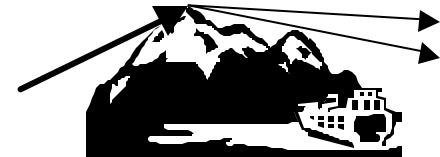

diffraction




# Real world example

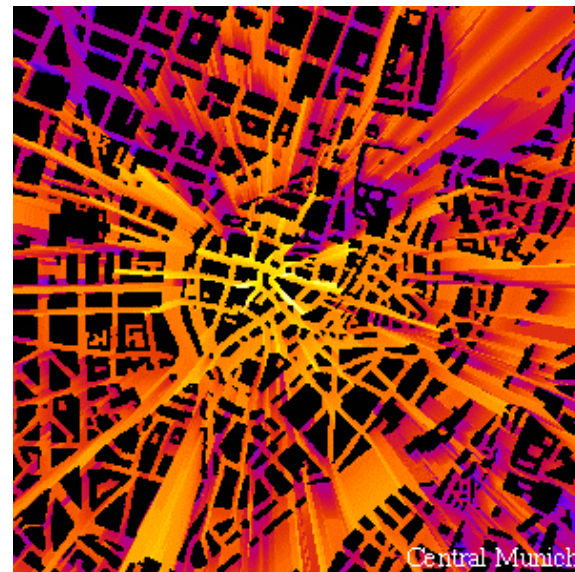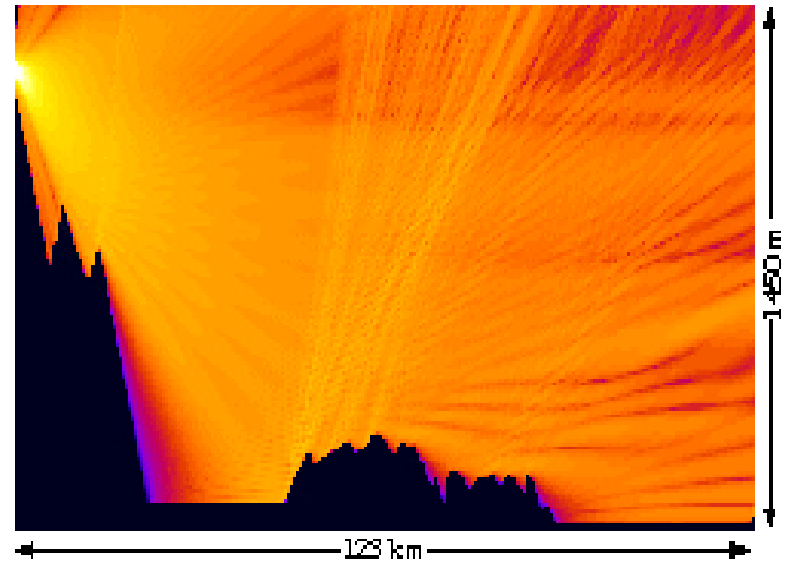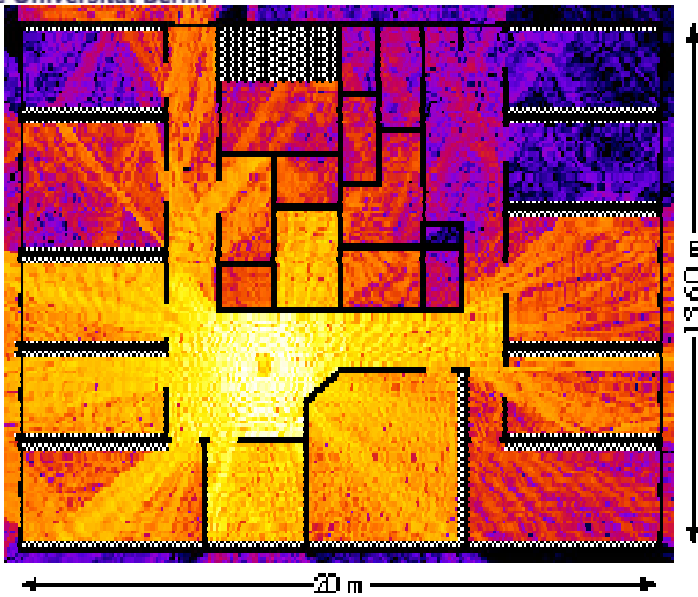

# Multipath propagation

Signal can take many different paths between sender and receiver due to reflection, scattering, diffraction

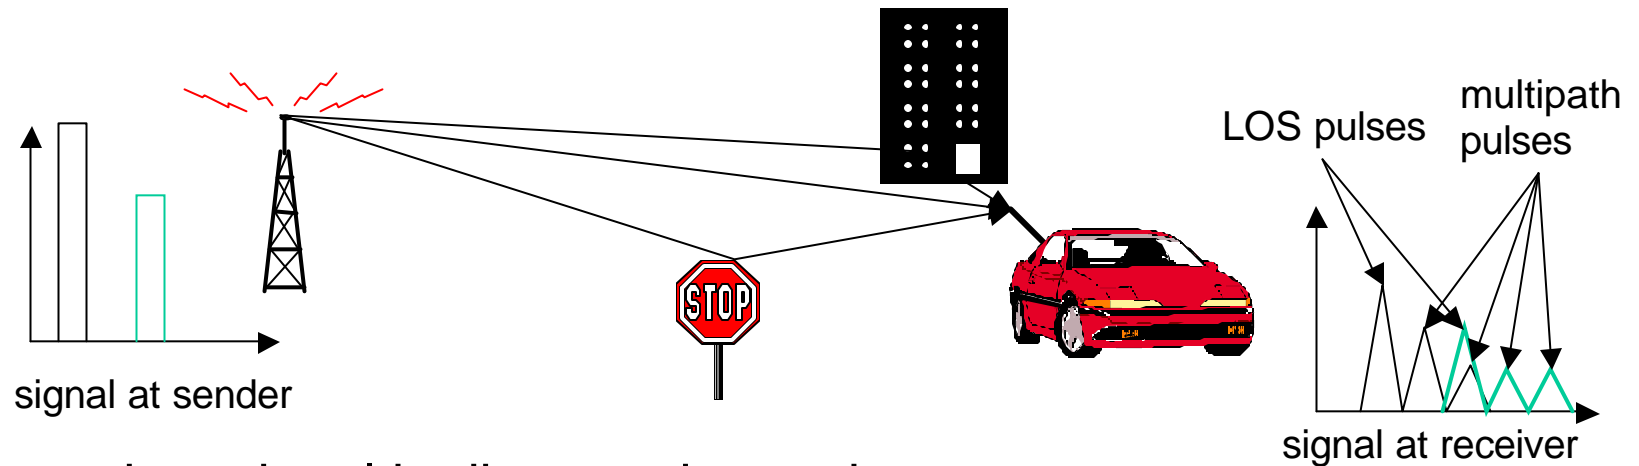

Time dispersion: signal is dispersed over time

→ interference with “neighbor” symbols, Inter Symbol Interference (ISI)

The signal reaches a receiver directly and phase shifted

→ distorted signal depending on the phases of the different parts





# Effects of mobility

Channel characteristics change over time and location


- ❑ signal paths change
- ❑ different delay variations of different signal parts
- ❑ different phases of signal parts

→ quick changes in the power received (short term fading)

Additional changes in

- ❑ distance to sender
- ❑ obstacles further away

→ slow changes in the average power received (long term fading)

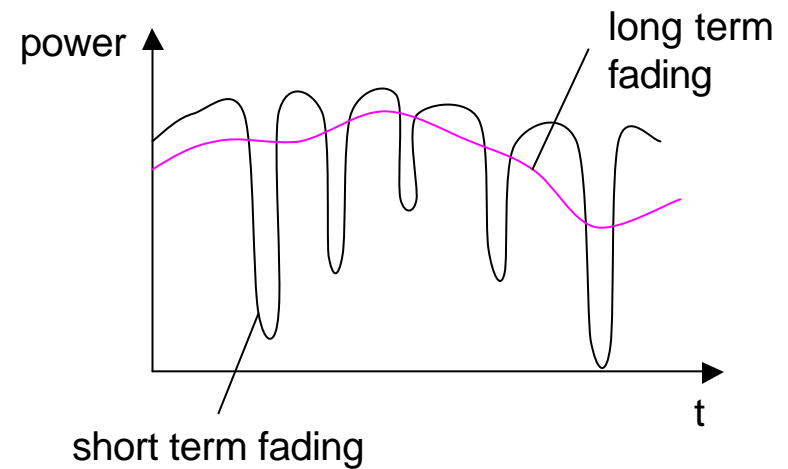



# Multiplexing

## Multiplexing in 4 dimensions

- ❑ space ( $s_i$ )
- ❑ time ( $t$ )
- ❑ frequency ( $f$ )
- ❑ code ( $c$ )

Goal: multiple use  
 of a shared medium

Important: guard spaces needed!

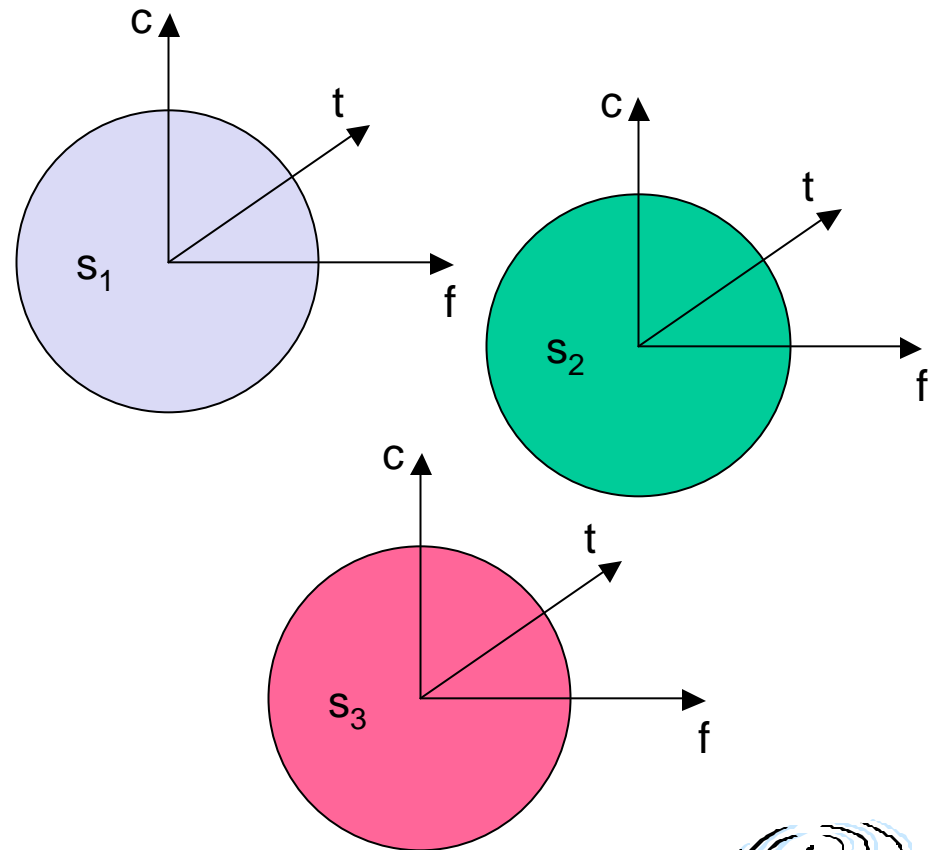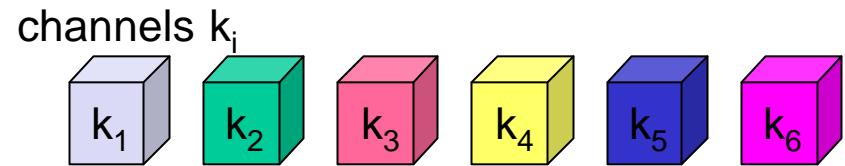

# Frequency multiplex

Separation of the whole spectrum into smaller frequency bands


A channel gets a certain band of the spectrum for the whole time

Advantages:

- ❑ no dynamic coordination necessary
- ❑ works also for analog signals

Disadvantages:

- ❑ waste of bandwidth if the traffic is distributed unevenly
- ❑ inflexible
- ❑ guard spaces

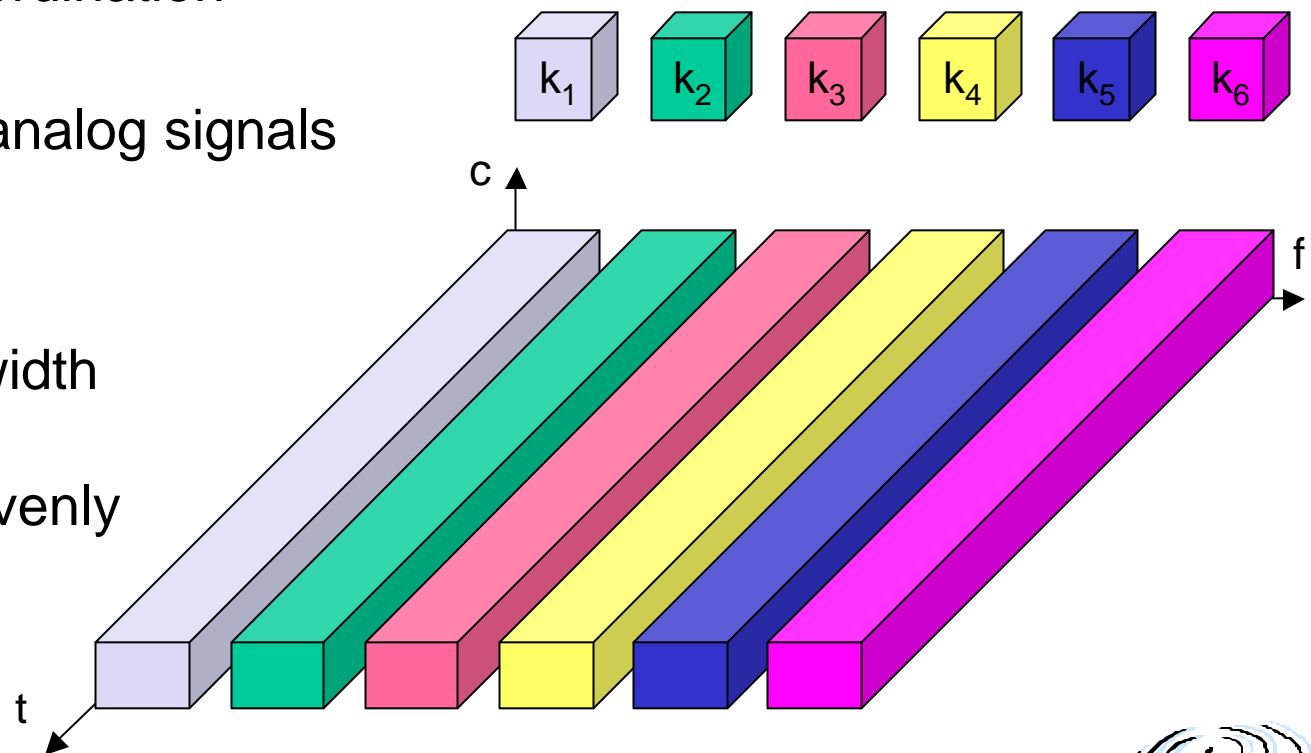


# Time multiplex

A channel gets the whole spectrum for a certain amount of time


Advantages:

- ❑ only one carrier in the medium at any time
- ❑ throughput high even for many users



Disadvantages:

- ❑ precise synchronization necessary

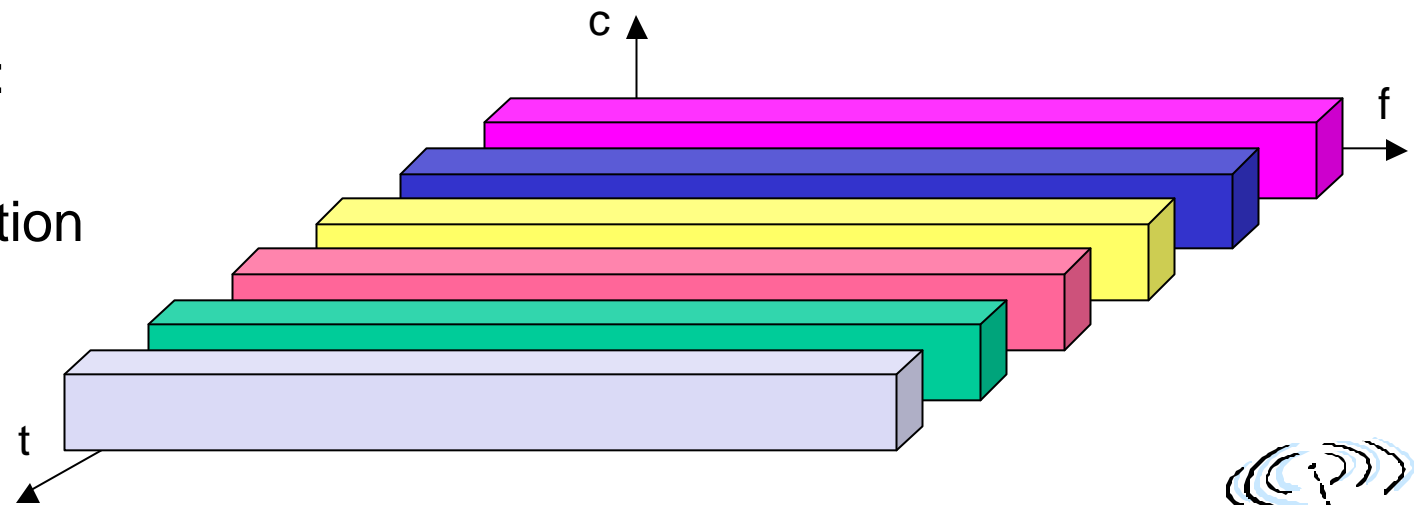

# Time and frequency multiplex

Combination of both methods


A channel gets a certain frequency band for a certain amount of time

Example: GSM

Advantages:

- ❑ better protection against tapping
- ❑ protection against frequency selective interference
- ❑ higher data rates compared to code multiplex

but: precise coordination required

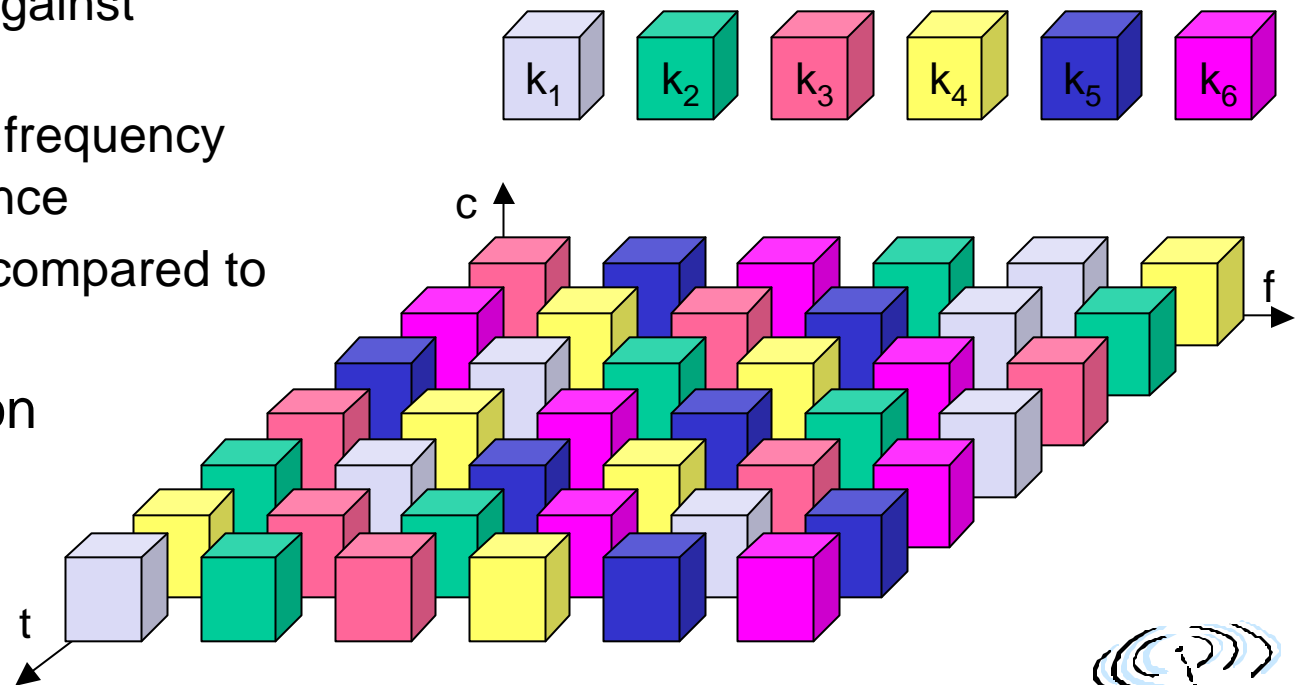

# Code multiplex

Each channel has a unique code

All channels use the same spectrum  
at the same time


Advantages:

- ❑ bandwidth efficient
- ❑ no coordination and synchronization necessary
- ❑ good protection against interference and tapping

Disadvantages:

- ❑ lower user data rates
- ❑ more complex signal regeneration

Implemented using spread spectrum  
technology

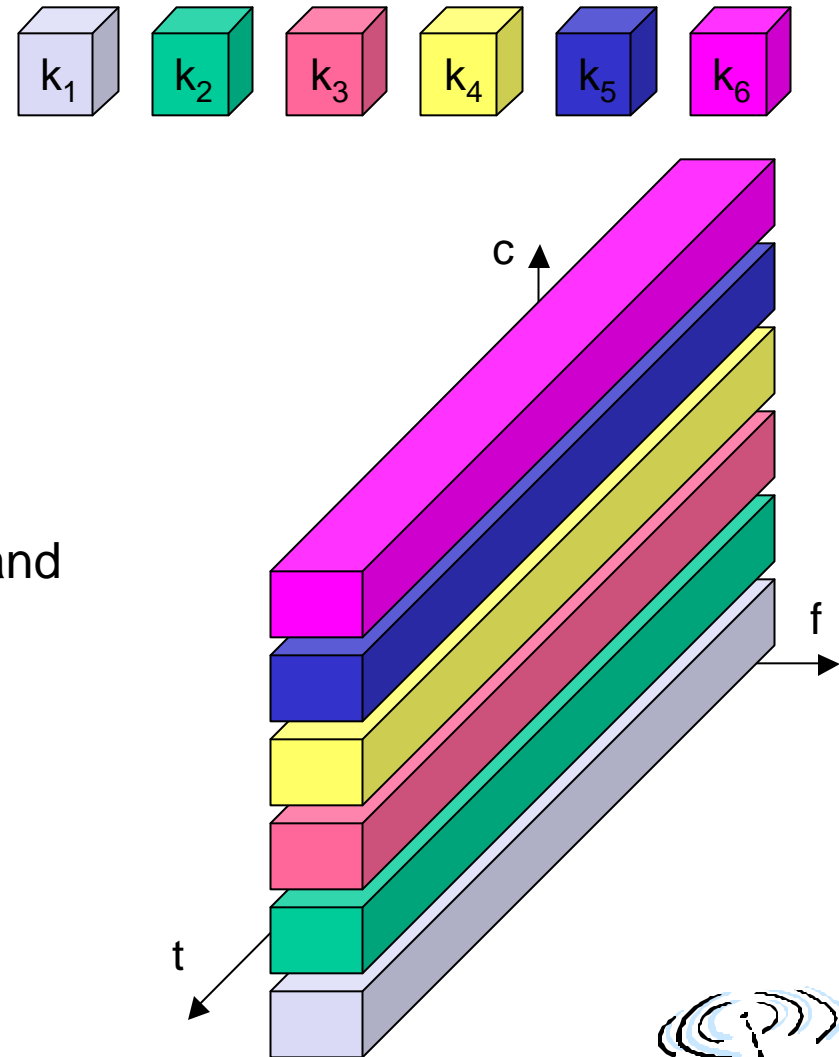

# Modulation

## Digital modulation

- ❑ digital data is translated into an analog signal (baseband)
- ❑ ASK, FSK, PSK - main focus in this chapter
- ❑ differences in spectral efficiency, power efficiency, robustness

## Analog modulation

- ❑ shifts center frequency of baseband signal up to the radio carrier

## Motivation



- ❑ smaller antennas (e.g.,  $\lambda/4$ )
- ❑ Frequency Division Multiplexing
- ❑ medium characteristics

## Basic schemes

- ❑ Amplitude Modulation (AM)
- ❑ Frequency Modulation (FM)
- ❑ Phase Modulation (PM)



# Modulation and demodulation

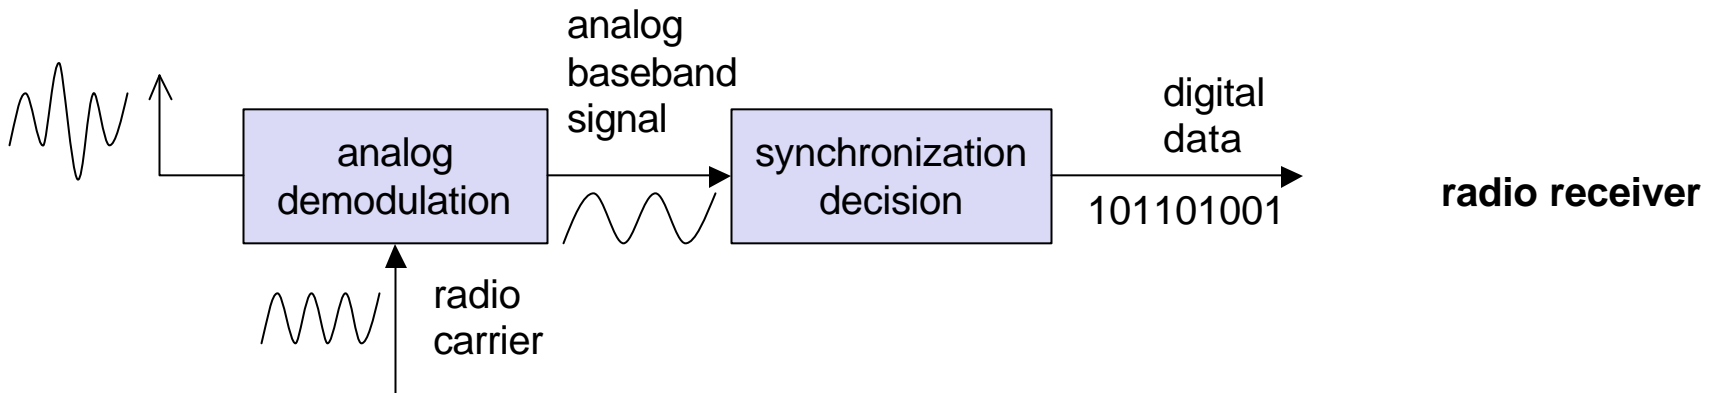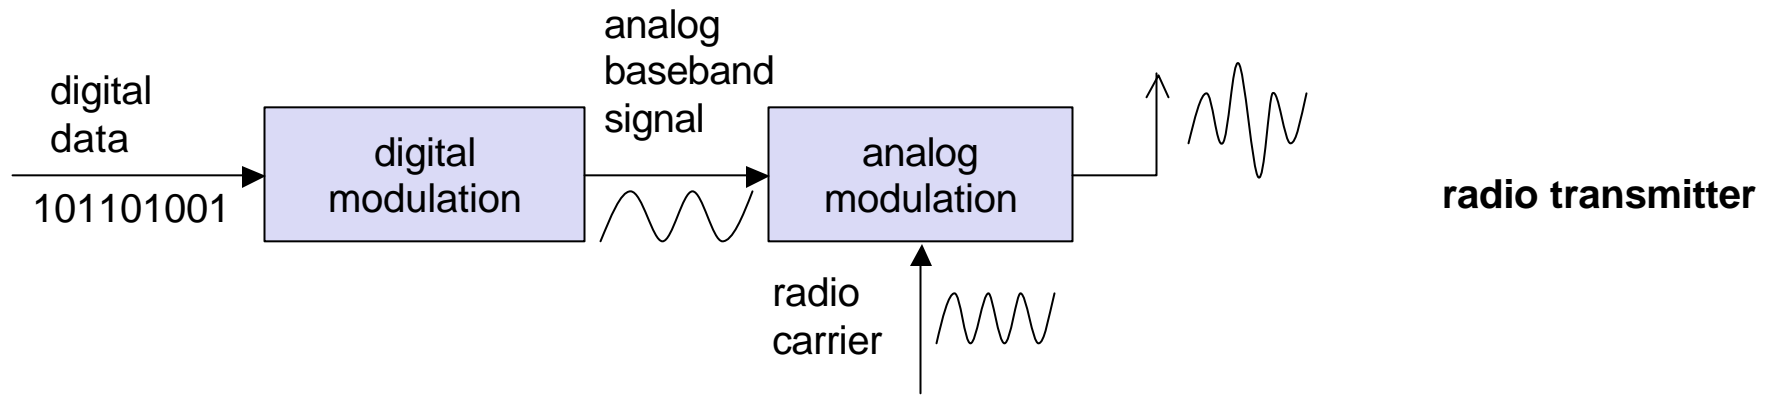




# Digital modulation

## Modulation of digital signals known as Shift Keying

- ❑ Amplitude Shift Keying (ASK):
  - ❑ very simple
  - ❑ low bandwidth requirements
  - ❑ very susceptible to interference
- ❑ Frequency Shift Keying (FSK):
  - ❑ needs larger bandwidth
- ❑ Phase Shift Keying (PSK):
  - ❑ more complex
  - ❑ robust against interference

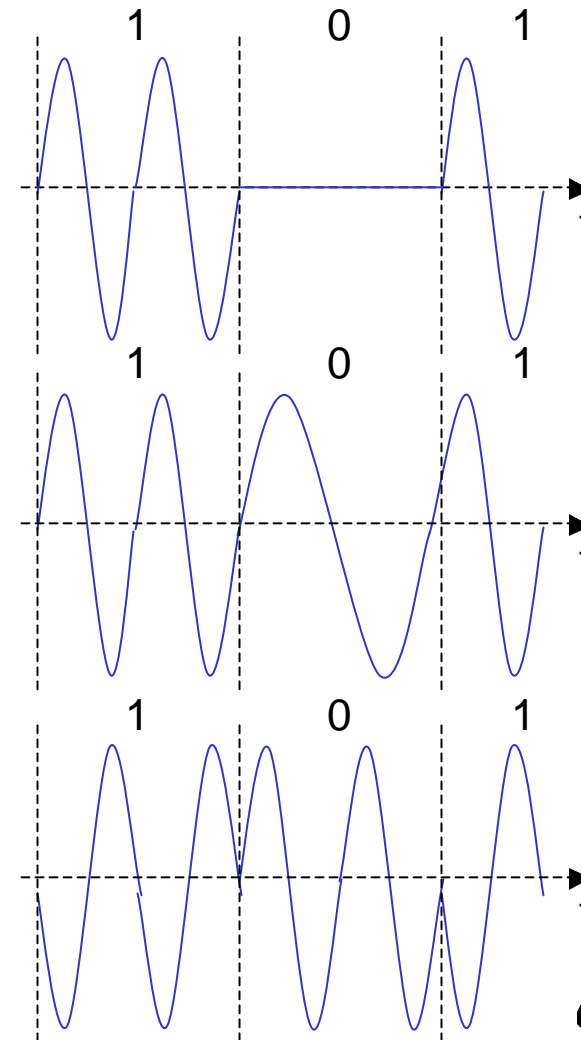


# Advanced Frequency Shift Keying

- ❑ bandwidth needed for FSK depends on the distance between the carrier frequencies
- ❑ special pre-computation avoids sudden phase shifts  
→ MSK (Minimum Shift Keying)
- ❑ bit separated into even and odd bits, the duration of each bit is doubled
- ❑ depending on the bit values (even, odd) the higher or lower frequency, original or inverted is chosen
- ❑ the frequency of one carrier is twice the frequency of the other
- ❑ Equivalent to offset QPSK
  
- ❑ even higher bandwidth efficiency using a Gaussian low-pass filter → GMSK (Gaussian MSK), used in GSM



# Example of MSK

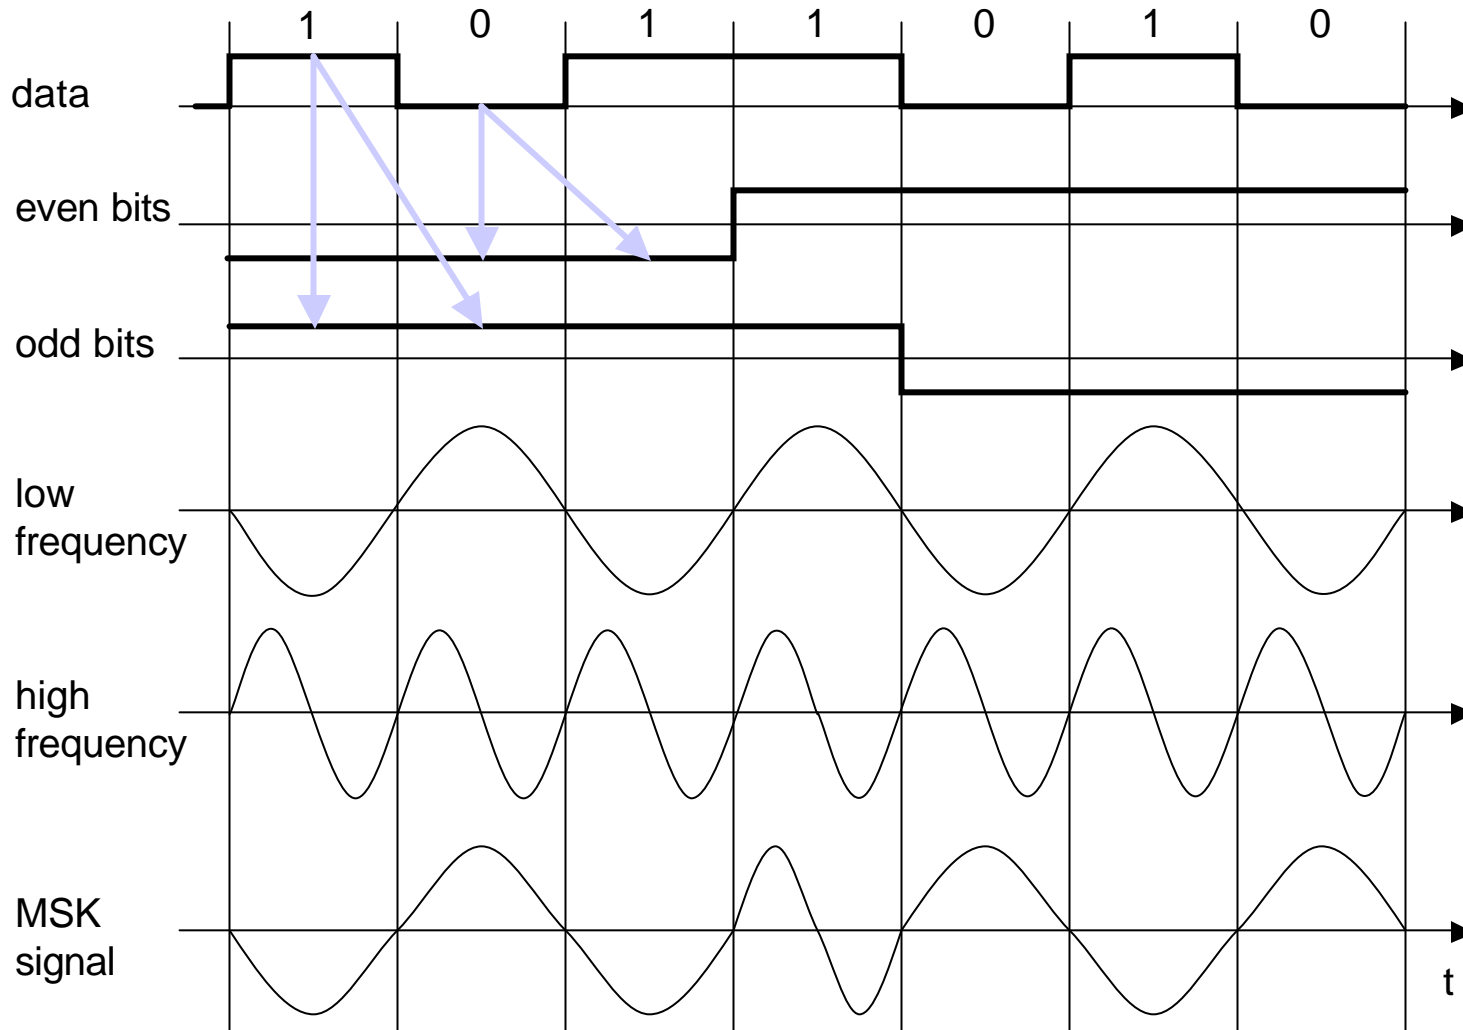

bit	
even	0 1 0 1
odd	0 0 1 1
signal value	h n n h - - ++

h: high frequency  
 n: low frequency  
 +: original signal  
 -: inverted signal

No phase shifts!



# Advanced Phase Shift Keying




## BPSK (Binary Phase Shift Keying):

- ❑ bit value 0: sine wave
- ❑ bit value 1: inverted sine wave
- ❑ very simple PSK
- ❑ low spectral efficiency
- ❑ robust, used e.g. in satellite systems

## QPSK (Quadrature Phase Shift Keying):

- ❑ 2 bits coded as one symbol
- ❑ symbol determines shift of sine wave
- ❑ needs less bandwidth compared to BPSK
- ❑ more complex


Often also transmission of relative, not absolute phase shift: DQPSK - Differential QPSK (IS-136, PHS)

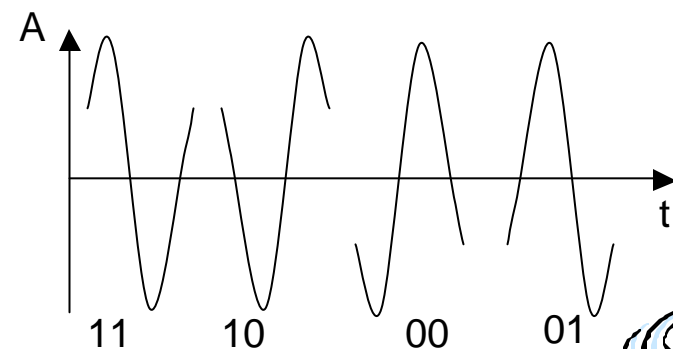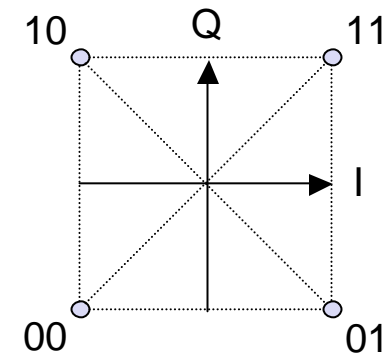

# Quadrature Amplitude Modulation

Quadrature Amplitude Modulation (QAM): combines amplitude and phase modulation

- ❑ it is possible to code  $n$  bits using one symbol
- ❑  $2^n$  discrete levels,  $n=2$  identical to QPSK
- ❑ bit error rate increases with  $n$ , but less errors compared to comparable PSK schemes

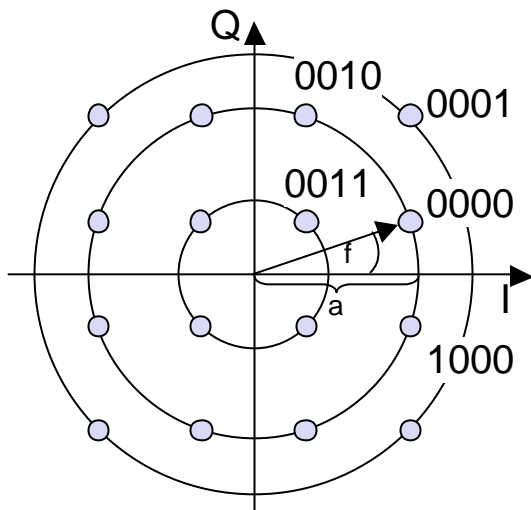

Example: 16-QAM (4 bits = 1 symbol)

Symbols 0011 and 0001 have the same phase  $f$ , but different amplitude  $a$ . 0000 and 1000 have different phase, but same amplitude.


→ used in standard 9600 bit/s modems



# Hierarchical Modulation

DVB-T modulates two separate data streams onto a single DVB-T stream

- ❑ High Priority (HP) embedded within a Low Priority (LP) stream
- ❑ Multi carrier system, about 2000 or 8000 carriers
- ❑ QPSK, 16 QAM, 64QAM
- ❑ Example: 64QAM
  - ❑ good reception: resolve the entire 64QAM constellation
  - ❑ poor reception, mobile reception: resolve only QPSK portion
  - ❑ 6 bit per QAM symbol, 2 most significant determine QPSK
  - ❑ HP service coded in QPSK (2 bit), LP uses remaining 4 bit

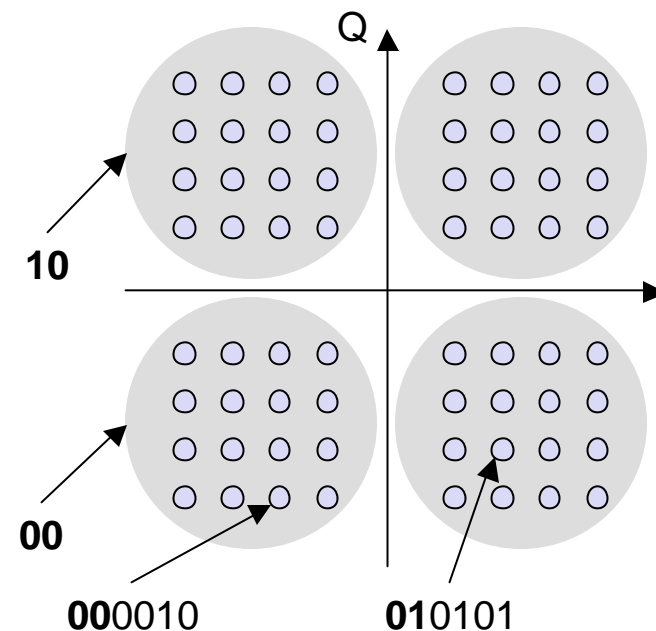


# Spread spectrum technology

Problem of radio transmission: frequency dependent fading can wipe out narrow band signals for duration of the interference

Solution: spread the narrow band signal into a broad band signal using a special code

protection against narrow band interference

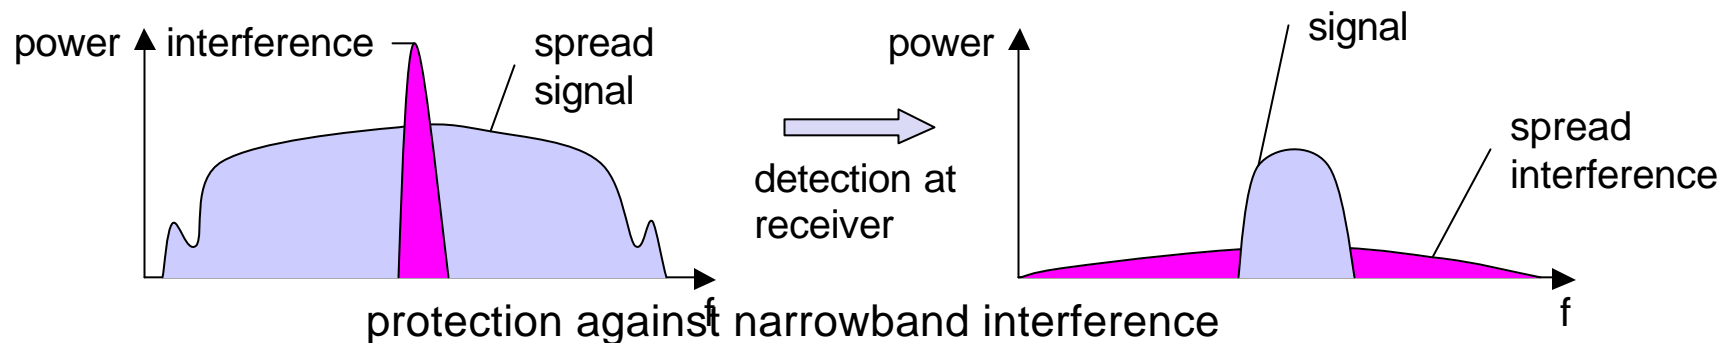


Side effects:

- ❑ coexistence of several signals without dynamic coordination
- ❑ tap-proof

Alternatives: Direct Sequence, Frequency Hopping




# Effects of spreading and interference

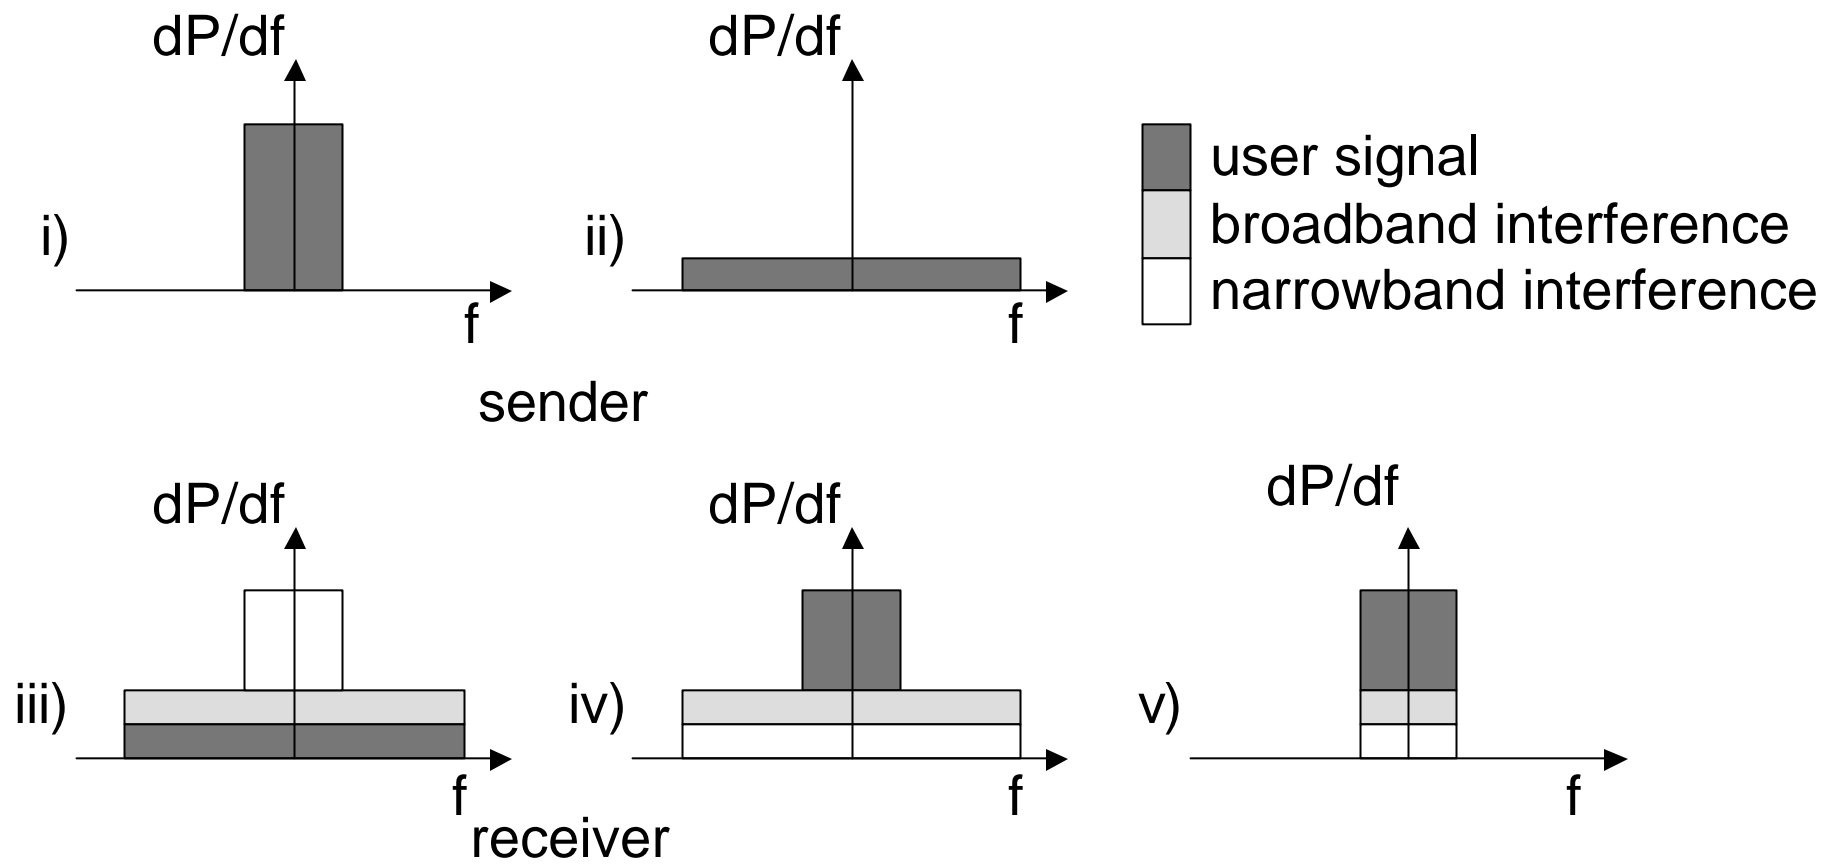




# Spreading and frequency selective fading

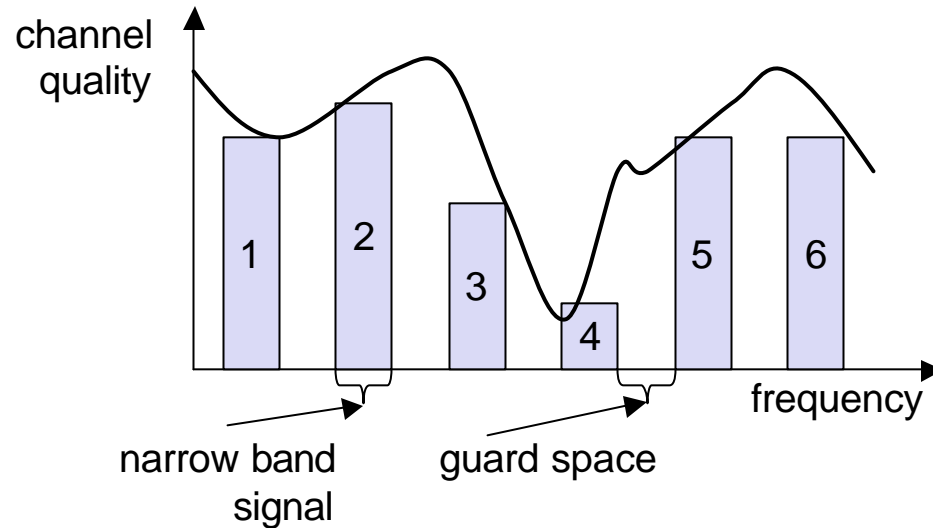

narrowband channels

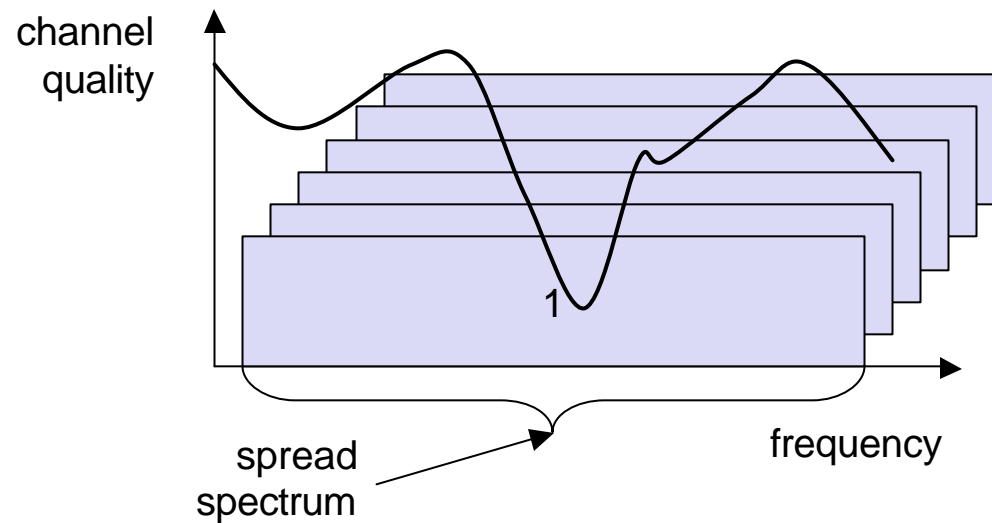

spread spectrum channels



# DSSS (Direct Sequence Spread Spectrum) I

XOR of the signal with pseudo-random number (chipping sequence)


- ❑ many chips per bit (e.g., 128) result in higher bandwidth of the signal

## Advantages


- ❑ reduces frequency selective fading
- ❑ in cellular networks
  - base stations can use the same frequency range
  - several base stations can detect and recover the signal
  - soft handover

## Disadvantages

- ❑ precise power control necessary

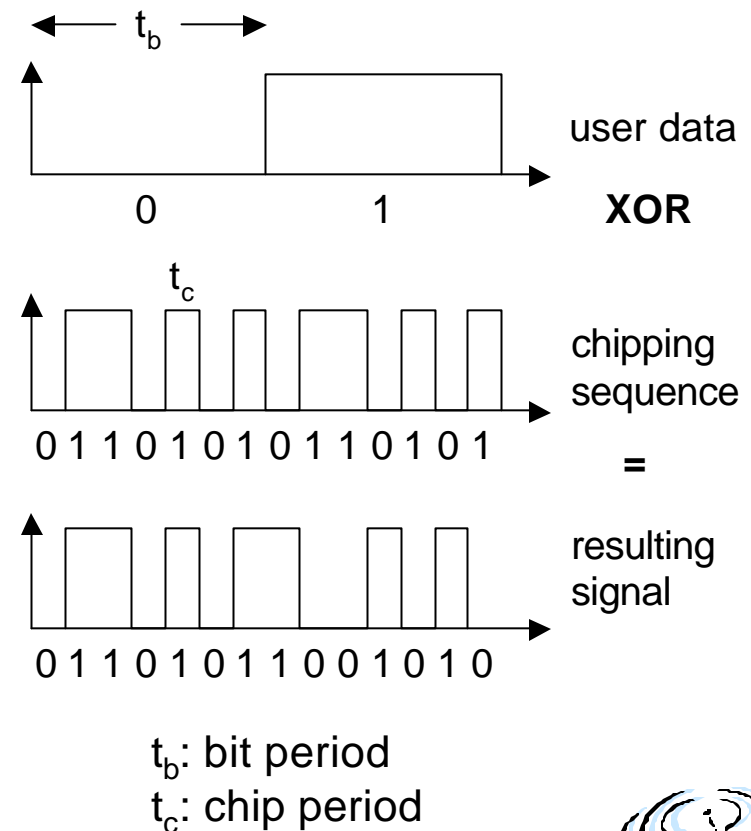

# DSSS (Direct Sequence Spread Spectrum) II

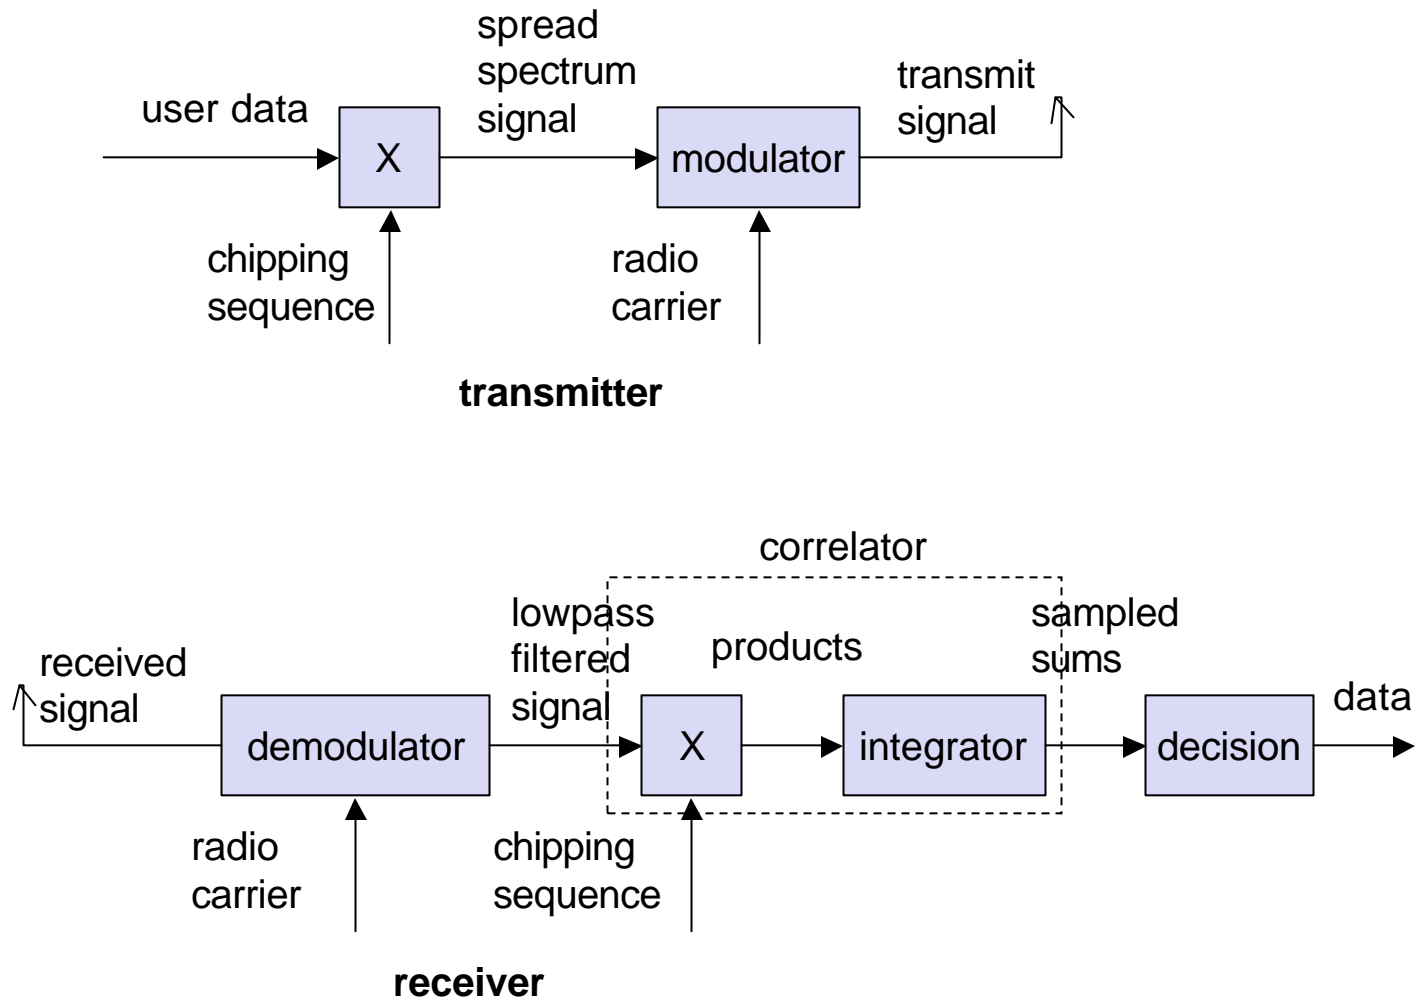

# FHSS (Frequency Hopping Spread Spectrum) I

## Discrete changes of carrier frequency

- ❑ sequence of frequency changes determined via pseudo random number sequence

## Two versions

- ❑ Fast Hopping:  
several frequencies per user bit
- ❑ Slow Hopping:  
several user bits per frequency

## Advantages


- ❑ frequency selective fading and interference limited to short period
- ❑ simple implementation
- ❑ uses only small portion of spectrum at any time

## Disadvantages

- ❑ not as robust as DSSS
- ❑ simpler to detect



# FHSS (Frequency Hopping Spread Spectrum) II

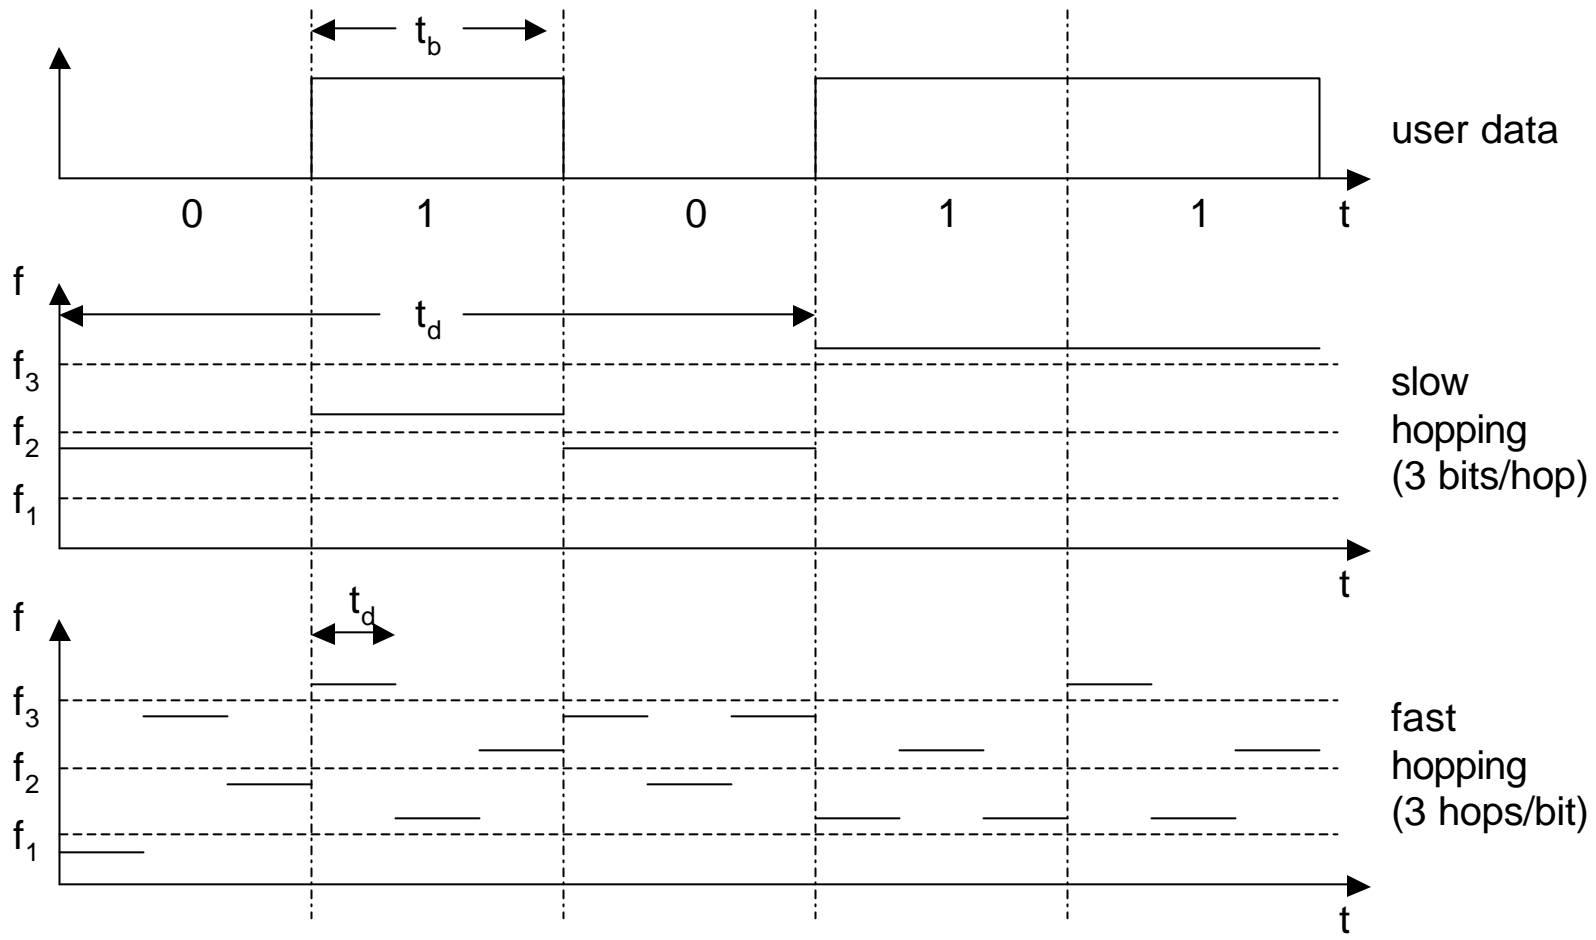


$t_b$ : bit period

$t_d$ : dwell time



# FHSS (Frequency Hopping Spread Spectrum) III

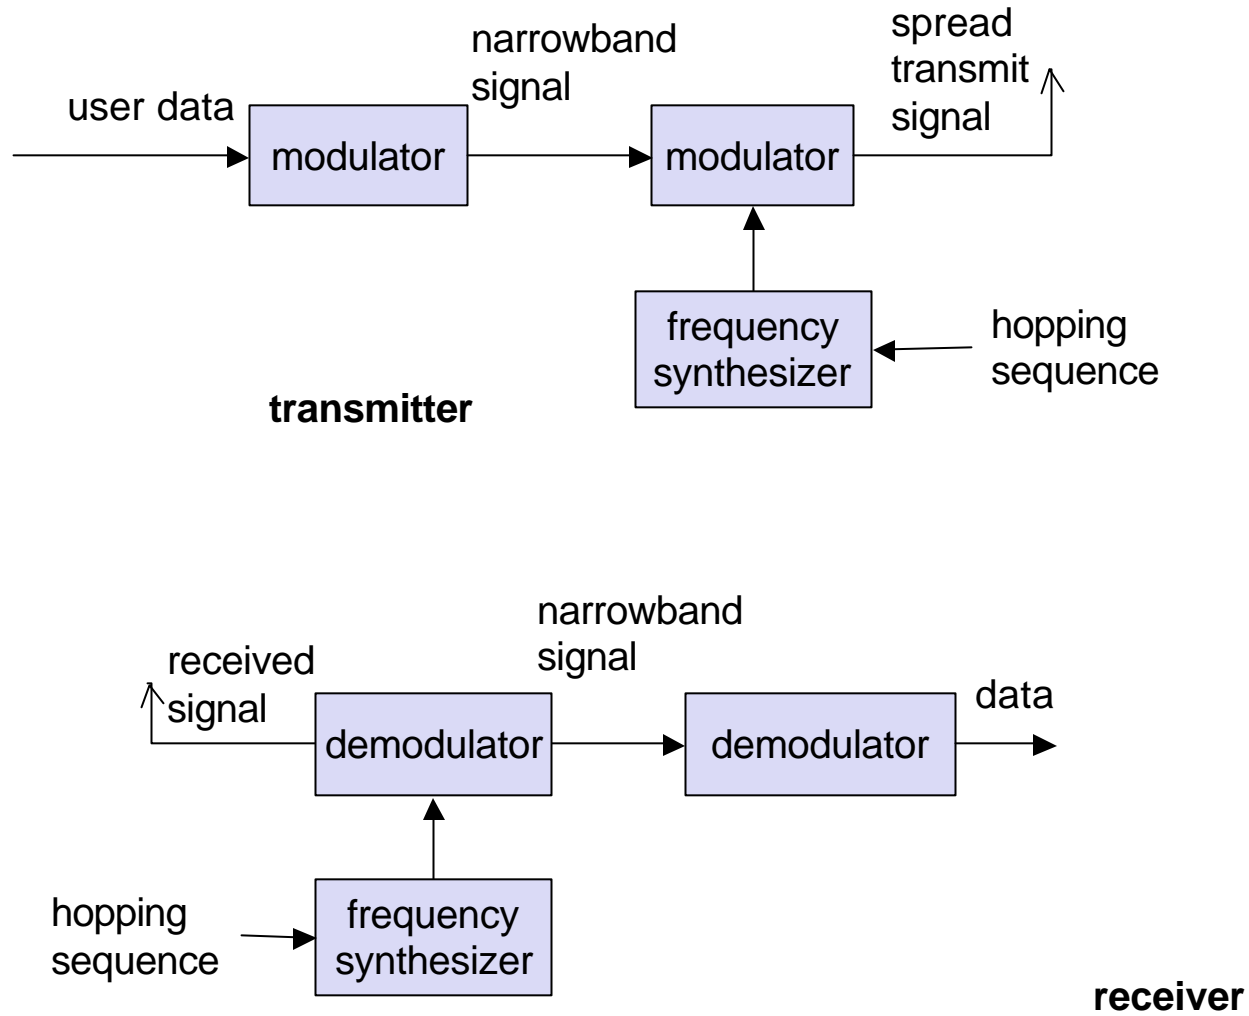

# Cell structure

Implements space division multiplex: base station covers a certain transmission area (cell)

Mobile stations communicate only via the base station

Advantages of cell structures:

- ❑ higher capacity, higher number of users
- ❑ less transmission power needed
- ❑ more robust, decentralized
- ❑ base station deals with interference, transmission area etc. locally

Problems:

- ❑ fixed network needed for the base stations
- ❑ handover (changing from one cell to another) necessary
- ❑ interference with other cells


Cell sizes from some 100 m in cities to, e.g., 35 km on the country side (GSM) - even less for higher frequencies



# Frequency planning I

Frequency reuse only with a certain distance between the base stations

Standard model using 7 frequencies:

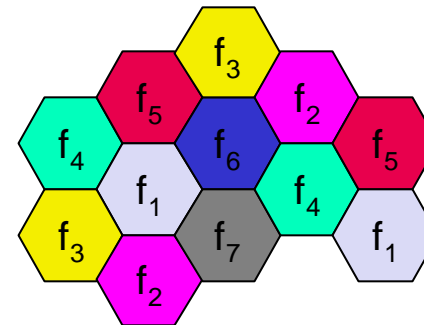

Fixed frequency assignment:

- ❑ certain frequencies are assigned to a certain cell
- ❑ problem: different traffic load in different cells


Dynamic frequency assignment:

- ❑ base station chooses frequencies depending on the frequencies already used in neighbor cells
- ❑ more capacity in cells with more traffic
- ❑ assignment can also be based on interference measurements







# Frequency planning II

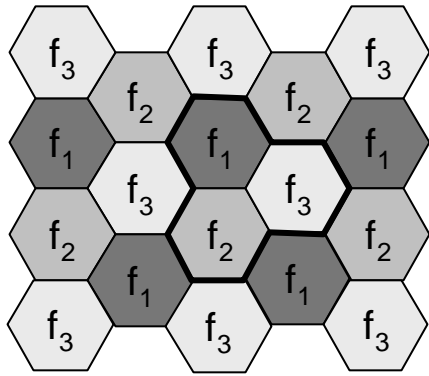

3 cell cluster

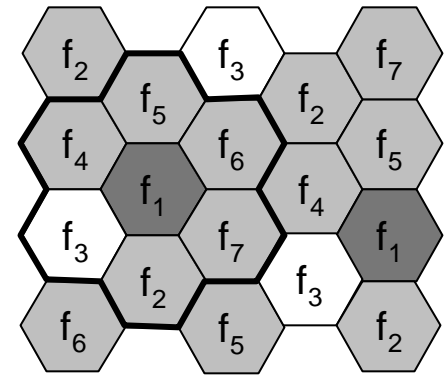

7 cell cluster

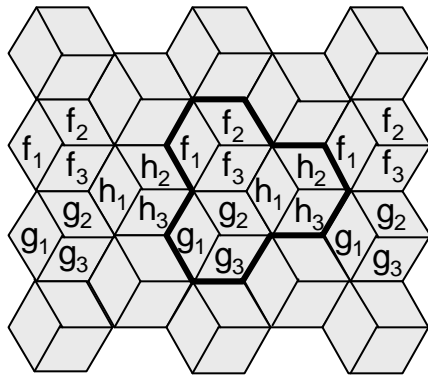

3 cell cluster  
with 3 sector antennas



# Cell breathing

CDM systems: cell size depends on current load  
Additional traffic appears as noise to other users  
If the noise level is too high users drop out of cells

