


DH-KIT/XVR1B04/2-B1A21/2-T1A21

4CH 1080P Series HD Surveillance Security System



- Support P2P, allowing easier home applications
- 1080P cameras input and 1080N recording
- All channel synchronous real-time playback
- H.265+/H.265 dual-stream video compression
- HDMI/VGA simultaneous video output
- Multiple network monitoring: web-browser, smart phone/tablet APP

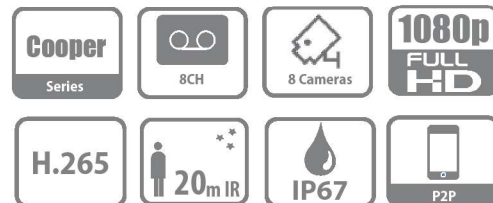

System Overview

Dahua, as a technology leader, is always the first ever developed the shining new technology in the security industry, and today we present Cooper KIT Series.

KIT is a form of packaging cameras, recorders and accessories together. Users just need to buy one KIT instead of multiple products which can save users valuable time and ease frustration. Plus, Cooper series is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of civil applications such as retail store, home protection and so on.

Functions

1080P HDCVI Cameras Input

The XVR supports 1080P cameras input and 1080N recording.

Smart H.265+

Smart Codec, H.265+ can reduce up to 90% bit rate and storage requirements compared with H.264 without having to invest in new cameras.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 800m(1080P)/1200m(720P) transmission via coaxial cable, and up to 300m(1080P)/450m(720P) via UTP cable.*

*Actual results verified by real-scene testing in Dahua's test laboratory.

Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

Perfect Image Quality

High performance chip provides perfect image quality with better color reproduction.

P2P

Monitor at anytime and anywhere. Easily and conveniently manage the device.

XVR Technical Specification

System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

Video and Audio

Video Input	4 Channel, BNC
IP Camera Input	4+2, each channel up to 6MP
Video Output	1 HDMI & 1 VGA, up to 1080P
Multi-screen Display	When IP extension mode not enabled:1/4/8/9 When IP extension mode enabled:1/4/8/9/16
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA

Recording

Video Compression	H.265+/H.265/H.264+/H.264
Resolution	1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main Stream: the 1st channel 1080N/720P(1~25/30fps), others 1080N/720P(1~15fps); 960H/D1/HD1/BCIF/CIF/QCIF(1~25/30fps) Sub stream: CIF/QCIF (1~7fps)
Video Bit Rate	32Kbps ~ 4096Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop

Network

Interface	1 RJ-45 Port (100M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android

Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis

Playback and Backup

Playback	1/4/9
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

Storage

Internal HDD	1 SATA Port, up to 6TB capacity
--------------	---------------------------------

Auxiliary Interface

USB	2 USB 2.0
-----	-----------

General

Power Supply	DC12V/1.5A (<10W)
Dimensions	Cooper 1U, 197mm×192mm×41mm (7.8"×7.6"×1.6")
Operating Conditions	-10°C ~ +45°C (+14°F ~ +113°F), 10~90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0~90% RH

Camera Technical Specification

Camera

Image Sensor	1/2.7" CMOS
Effective Pixels	1920(H)×1080(V), 2MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination	0.04Lux/F1.85, 30IRE, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 20m (66feet)
IR On/Off Control	Auto / Manual

Lens

Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	3.6mm
Max Aperture	F1.85
Angle of View	H: 93°
Focus Control	N/A
Close Focus Distance	800mm 31.50"

Pan / Tilt / Rotation

Pan/Tilt/Rotation	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotation: 0° ~ 360°
-------------------	---

Video

Resolution	1080P (1920×1080)
Frame Rate	25/30fps@1080P, 25/30/50/60fps@720P
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)
Day/Night	Auto (ICR) / Manual
OSD Menu	Multi-language
BLC Mode	BLC / HLC / DWDR
WDR	DWDR
Gain Control	AGC
Noise Reduction	2D
White Balance	Auto / Manual
Smart IR	Auto / Manual

General


Casing	Plastic
Power Supply	12V DC ±30%, max. 2.7W (12V DC, IR on)
Dimensions	70mm×70mm×149mm (2.76"×2.76"×5.87")
Ingress Protection & Vandal Resistance	IP67
Operating Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH * Start up should be done at above -40°C (-40°F)
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 95% RH

Ordering Information


Type	Part Number	Description
2MP KIT	DH-KIT/XVR1B04/2-B1A21/2-T1A21N	4CH 1080P Series HD Surveillance Security System
	DH-KIT/XVR1B04/2-B1A21/2-T1A21P	

Dimensions (mm/inch)


DH-XVR1B04

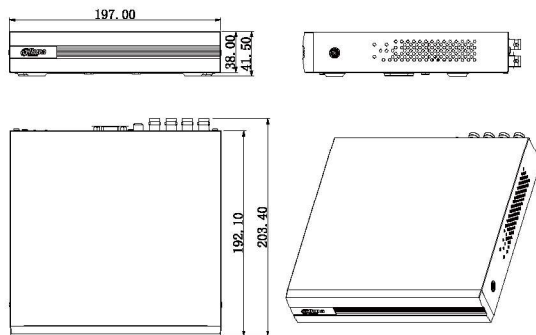


DH-HAC-B1A21-0360B

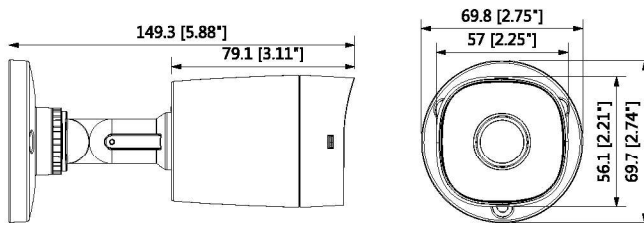

What's In the Box ?

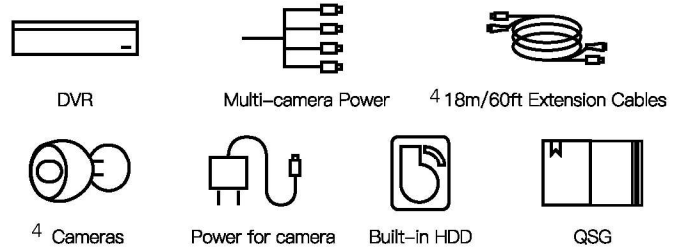


DH-HAC-T1A21

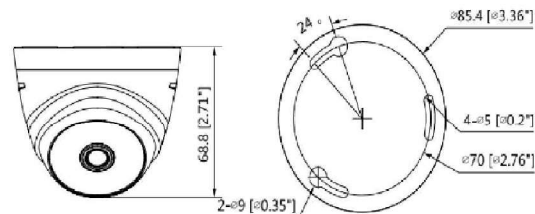

Rear Panel

DH-XVR1B04

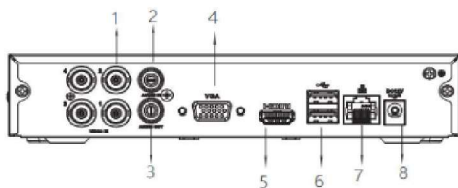

- | | |
|----------------------------|---------------------|
| 1 VIDEO IN | 5 HDMI Interface |
| 2 AUDIO IN, RCA Connector | 6 USB Interface |
| 3 AUDIO OUT, RCA Connector | 7 Network Interface |
| 4 VGA Interface | 8 DC12V Power Input |