

MAXXIS[®]
TIRES



2018//CATALOG





COMMITTED TO EXCELLENCE. SINCE 1967.

Since 1967, Maxxis has been delivering high-quality tire products through a continued commitment to excellence. With input from our roster of championship-winning drivers, we can ensure that our products measure up to the toughest real-world standards. Whether you're winning a race or simply enjoying your daily commute, Maxxis is the tire company you can trust.





TABLE OF CONTENTS

PRODUCT RANKINGS

COMPETITION

VICTRA RC-1	10 //
VICTRA R-19	12
VICTRA VR-1	13
	14

ULTRA HIGH PERFORMANCE

VICTRA M36+	16 //
VICTRA VS-01	18
VICTRA MA-Z3	19
VICTRA MA-Z4S	20
VICTRA MA-511	21
PREMITRA HP5	22
	23

PASSENGER CAR RADIAL

WALTZ MS1	24 //
ESCAPADE MA-T1	26
MECOTRA ME-3	27
i-ECO	28
MA-P3	29
PRAGMATRA MP-10	30
	31

SPORT UTILITY VEHICLE

S-PRO	32 //
MARAUDER MA-S2	34
ESCAPADE CUV	35
BRAVO HP-M3	36
PRAGMATRA MP-15	37
	38

LIGHT TRUCK

BRAVO HT-770	40 //
BRAVO AT-771	42
BRAVO AT-980	44
RAZR MT	45
BIGHORN MT-764	46
	47

EXTREME OFF-ROAD

CREEPY CRAWLER M8090	48 //
TREPADOR BIAS M8060	50
TREPADOR COMPETITION M8060	51
TREPADOR RADIAL M8060	52
	53

WINTER

ARCTIC TREKKER NP-3	54 //
PREMITRA NS-5	56
ARCTIC TREKKER SP-02	57
PREMITRA SP-03	58
PRESA SS-01	59
ARCTIC TREKKER AP-2	60
VANSNART ALL SEASON AL2	61
ARCTIC TREKKER WP-05	62
VANSNART SNOW WL2	63
PRESA MA-SLW	64
	65

COMMERCIAL

BRAVO UE-168(N)	66 //
VANSNART MCV3+	68
	69







TIRE SPECIFICATIONS

72 //



PRODUCT RANKINGS //

Disclaimer: Product Ranking scores are applicable only to similar category products.

	Competition	Competition	UHP	UHP	UHP	UHP	UHP
	RC-1 pg. 12	VR-1 pg. 14	M36+ pg. 18	VS-01 pg. 19	MA-Z3 pg. 20	MA-Z4S pg. 21	MA-511 pg. 22
							
Dry Performance							
Wet Performance							
Ride Refinement							
Rolling Resistance							
Tread Wear							
Vehicle Fitments							
	UHP	PCR	PCR	PCR	PCR	PCR	PCR
	HP5 pg. 23	MS1 pg. 26	MA-T1 pg. 27	ME-3 pg. 28	i-ECO pg. 29	MA-P3 pg. 30	MP-10 pg. 31
							
Dry Performance							
Wet Performance							
Ride Refinement							
Rolling Resistance							
Tread Wear							
Vehicle Fitments							

	SUV	SUV	SUV	SUV	SUV
	<i>S-PRO</i>	<i>MA-S2</i>	<i>ESC. CUV</i>	<i>HP-M3</i>	<i>MP-15</i>
	pg. 34	pg. 35	pg. 36	pg. 37	pg. 38
					
Dry Performance					
Wet Performance					
Ride Refinement					
Rolling Resistance					
Tread Wear					
Vehicle Fitments	Crossover  SUV 	SUV  Pick-Up Truck 	Crossover 	Crossover  SUV  Pick-Up Truck 	Crossover  SUV 

	LT	LT	LT	LT	LT
	<i>HT-770</i>	<i>AT-771</i>	<i>AT-980</i>	<i>RAZR MT</i>	<i>MT-764</i>
	pg. 42	pg. 44	pg. 45	pg. 46	pg. 47
					
On-Road Performance					
Noise Performance					
Tread Wear					
Dirt Performance					
Mud Performance					
Vehicle Fitments	SUV  Pick-Up Truck 	SUV  Pick-Up Truck 	SUV  Pick-Up Truck 	SUV  Pick-Up Truck 	SUV  Pick-Up Truck 

Winter

WP-05

pg. 63



Winter

WL2

pg. 63



Winter

MA-SLW

pg. 65



Snow Braking

Snow Handling

Ice Braking

Ice Handling

Tread Wear

Family Sedan

Compact Car

Mini Van

Van

Van



Commercial

UE-168(N)

pg. 68



Commercial

MCV3+

pg. 69



On-Road Performance

Noise Performance

Tread Wear

Dirt Performance

Mud Performance

Pick-Up Truck

Van

Van







COMPETITION

VICTRA // RC-1

A race tire built by racers, for racers. Whether you're a club racer, track day enthusiast or an enduro racing warrior, the Victra RC-1 was designed to deliver an addicting combination of grip, handling and heat cycle performance.



UTQG 100 A A

- 1 Reinforced Bead Wire Package**
Ensures optimum contact between wheel and tire for improved air retention.
- 2 High Modulus Bead Filler Rubber**
Increases sidewall stiffness for better steering feedback and response.
- 3 High Strength Body Casing**
Increases overall tire stiffness for excellent durability, handling and response.
- 4 High Tensile Strength Steel Belts**
Increases under-tread stiffness for great cornering performance and tread wear.
- 5 Spiral-Wound Cap Ply**
Improves overall tire uniformity and high-speed stability.



VICTRA // R-19

Building on our extensive experience in off-road racing, the Victra R-19 is our latest weapon to help rally drivers tackle the toughest gravel stages in the world. The tire features multiple reinforcements in the tread and sidewall to maximize durability so drivers can focus on the task at hand.

VICTRA R-19 GROOVING RECOMMENDATIONS

Tire grooving must be done by trained professionals only.



HEAVY RAIN

SHOWERS

LIGHT RAIN



COMPOUND		ROAD SURFACE			ROAD CONDITION			AMBIENT TEMPERATURE							
Hardness	Working Temp.	Soft/Sandy	Hard/Rocky	Packed	Wet	Damp	Dry	5°C	10°C	15°C	20°C	25°C	30°C	35°C	40°C
Soft	20°C-60°C														
Medium	50°C-100°C														
Hard	90°C-120°C														

Tire Pressure Recommendations:

1. From service to competition area, the recommended pressure is 220-250kpa.
2. During competition, the recommended pressure is 180-220kpa.

VICTRA // VR-1

Designed for the motor sports enthusiast, the Victra VR-1 is a tire for drivers who want it all. The VR-1 features a compound that warms to operating temperature quickly and provides tenacious dry traction on the street or the track. The VR-1's compound also heat cycles well, ensuring consistent lap times throughout the life of the tire. The new pattern was designed to maximize dry performance while minimizing white-knuckle moments in wet weather. The reinforced casing design provides almost telepathic responses, allowing the driver to put the car where it needs to be.



UTQG 200 AA A



- 1 Continuous center rib design improves braking and high-speed performance**
- 2 Wide Circumferential Grooves channel water away from the contact patch, improving hydroplaning resistance**
- 3 Reinforced Multi-Pitch Tread Blocks reduce pattern noise while improving handling and steering precision**





*ULTRA HIGH
PERFORMANCE*





56

SEEHORN
JANKOWSKI

56

MAXXIS

FISHHEAD

PERFORMANCE TUNING

DRECA

METHOD
RACE WHEELS

PRIMITIVE RACING

SCRUBBLADE
SCRUBBING RIFER BLADES

MAXXIS


VICTRA // M36+

A run-flat UHP tire designed for premium vehicles, the M36+ improves upon the M36 by adding run-flat technology. The Maxxis Run-Flat System (MRS) helps the driver retain vehicle control and peace of mind during tire blowouts.



UTQG 300 AA A

- 1 Body-PLY (Rayon) - New ply material provides increased heat resistance and maintains tire integrity and durability under zero inflation pressure**
- 2 PAD (Sidewall Reinforcement Rubber) - Advanced rubber compound and construction design form the foundation of MRS, providing optimal safety and comfort even under zero inflation pressure**
- 3 New Bead Filler Design - New bead filler compound minimizes heat buildup and improves durability even with zero inflation pressure**
- 4 Sidewall Reinforcement Ply - Reinforced bead design minimizes area deformation, securing the tire and wheel assembly for added durability under zero inflation pressure**

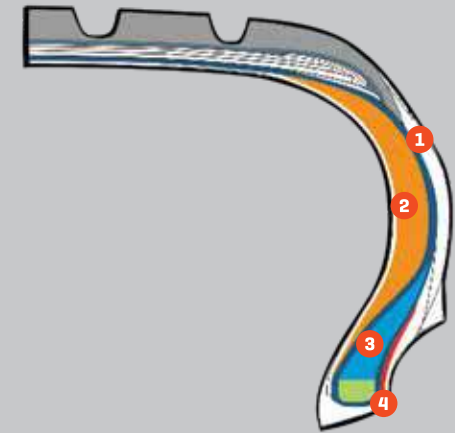

VICTRA // VS-01

An asymmetric UHP Summer tire designed for premium sport sedans, the VS-01 features modern tread technologies to minimize perceived pattern noise. The tire also features many structural reinforcements and high-strength materials to sharpen handling while maintaining a civilized ride.

- 1 Continuous center rib design improves braking and high-speed performance
- 2 Reinforced Multi-Pitch Tread Blocks reduce pattern noise while improving handling and steering precision
- 3 Wide Circumferential Grooves channel water away from the contact patch, improving hydroplaning resistance




UTQG 240 AA A

VICTRA // MA-Z3

A directional UHP summer tire that isn't afraid of the rain, the MA-Z3 features aggressive grooving and a microsilica-infused tread compound for improved wet weather performance. Large 3D shoulder and high-stiffness casing design ensures that the MA-Z3 can devour turns with the best as well.



UTQG 300 A A

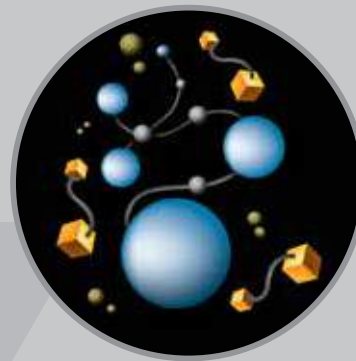

Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.




- 1 Continuous center rib design improves braking and high-speed performance
- 2 Reinforced Multi-Pitch Tread Blocks reduce pattern noise while improving handling and steering precision
- 3 Wide Circumferential Grooves channel water away from the contact patch, improving hydroplaning resistance

VICTRA // MA-Z4S

An all-season UHP tire enhanced for wet weather performance, the MA-Z4S features aggressive rain grooves to channel water away with great efficiency so you can drive with the greatest peace of mind. Some sizes feature additional edge plies for maximum high-speed stability and driving confidence.



Multiple snow-biting grooves and optimal siping design for great traction on snowy surfaces.



4 high-void, circumferential main grooves expel water for enhanced wet traction.



Solid Center Rib designed for high-speed stability. V-shaped unidirectional grooves for improved handling on dry and wet roads.



5-pitch tread blocks and 2-in-1 groove designs minimize noise for a quiet, comfortable ride.



M&S All-season rated
UTQG 420 AA A

VICTRA // MA-511

A standard non-directional UHP tire engineered to deliver great value for this segment, the MA-511 is a solid performer in the dry but features wide grooves and a dual layer silica tread compound to further enhance wet weather performance. The new rib design promotes even tread wear and minimizes pattern noise over the life of the tire.




UTQG 400 A A

- 1 Dual layer silica tread compound improves rolling resistance and wet performance
- 2 High-Strength Casing Design improves response



PREMITRA // HP5

A standard UHP tire engineered to reduce our carbon footprint, the HP5 was engineered to feature the same Maxxis handling prowess but with more focus on low rolling resistance technologies. The full silica tread compound and bead filler design helps reduce rolling resistance while maximizing ride comfort and wet traction.

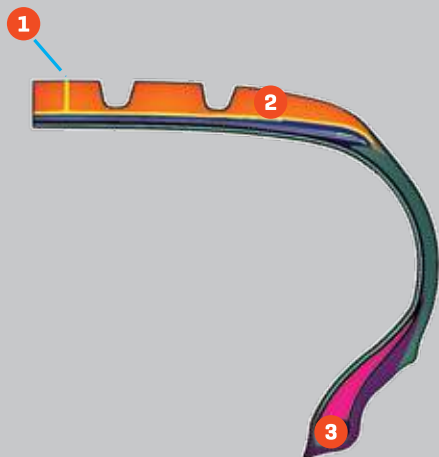

1 Static Electricity Conduction Channel
Discharges unwanted static electricity from the tire to minimize static shock.

2 Full-Silica
Full silica tread compound engineered to lower rolling resistance and maximize wet weather performance for extra peace of mind.

3 Slim Bead Filler
New Bead Filler design lowers rolling resistance and improves ride comfort.



1 Continuous Outside Blocks
Continuous shoulder block design [orange] maximizes road contact for improved steering response and cornering traction.

2 Curved Shoulder Grooves
Arc shoulder groove design [green] reduces turbulent air noise for a more serene ride.



UTQG 340 AA A






PASSENGER CAR RADIAL

WALTZ // MS1

A grand touring summer tire engineered for refinement, the new MS1 employs a new silica compound that dramatically improves both dry and wet traction. The new MS1 also features a new tread design that helps to improve overall mileage, noise and braking performance.



UTQG 320 A A



Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.



- 1 New S tread block design improves ride comfort while minimizing pattern noise**
- 2 Closed shoulder tread design improves steering response and handling while minimizing noise resonance in cabin**
- 3 High-density sipe design provides additional biting edges for improved traction on slippery surfaces**

ESCAPADE // MA-T1

An all-season premium touring tire, the MA-T1 features a new mileage-oriented compound for outstanding tread wear performance. The MA-T1 also features a non-directional symmetric pattern that can be rotated to minimize pattern noise throughout the life of the tire.

- All-season touring tire designed for premium touring vehicles
- Non-directional tread pattern provides quiet ride
- Specially formulated compound optimized for long wear
- Four high-void circumferential grooves offer excellent hydroplaning resistance
- Overall construction and design maximize ride refinement
- Jointless spiral-wound cap ply maximizes ride refinement and durability




M&S All-season rated
UTQG 560 A A - 720 A A
[See dealer for specific UTQG information]

MECTORA // ME-3


One of the new generation of ECO touring tires, the ME-3 features a nano-silica tread compound to enhance wet performance and rolling resistance. The ME-3 also features a new sipe design that helps absorb water away from the tread contact surface for improved hydroplaning resistance.



UTQG 380 A A

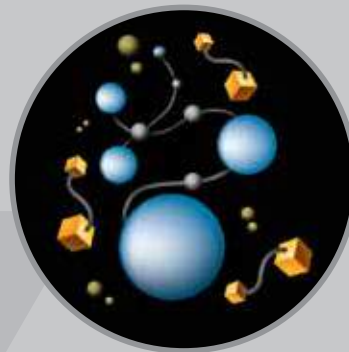

Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.

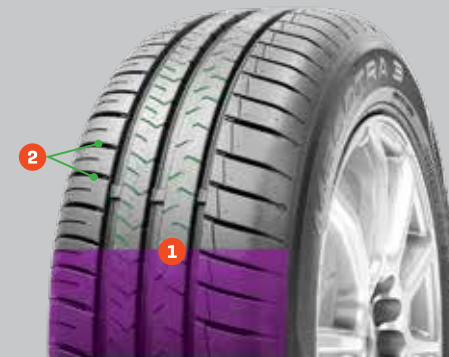

1 Nano-Silica Compound


New Nano-Silica compound improves rolling resistance and wet weather performance.

2 3D Sipes

3D sipes on center rib and shoulders (green) increase traction edges for improved traction on slippery and wet surfaces.


// i-ECO

An eco-touring tire, the i-ECO features our new UHR tread compound which helps absorb impact from bumps and other road imperfections for a smoother ride. The nano-engineered silica in the UHR rubber helps to minimize rolling resistance and maximize fuel economy, while the patented water groove design minimizes pipe resonance to reduce cabin noise.



Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.

WET BRAKING IMPROVES 7.3% Speed: 80-0km/h

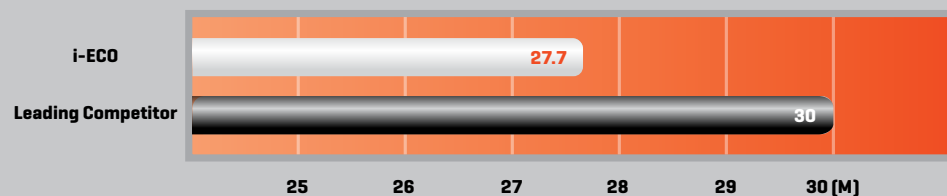

UTQG 340 A A

// MA-P3

Based on the highly successful MA-P1, the MA-P3 further refines the driving experience. With a new closed shoulder design to minimize noise resonance in the tread area for reduced cabin noise, the MA-P3 features a new construction design to maintain a stable contact patch for improved braking performance as well as overall traction.



UTQG 440 A A - 440 A B
[See dealer for specific UTQG information]

- A performance touring tire designed for modern sedans
- New center rib design delivers increased handling response and braking performance
- Closed shoulder pattern design minimizes pattern noise for greater driving comfort
- Proven robust casing for extra durability, handling and peace of mind
- New tread compound minimizes rolling resistance and maximizes tread wear

PRAGMATRA // MP-10

A standard touring tire designed to improve pattern noise and wet performance, the MP-10 features a high-density groove and sipe design for additional traction edges on slippery road surfaces. The rib pattern design improves overall wear and reduces pattern noise, while the solid center rib enhances high-speed stability and braking.

- 1 Solid center rib (yellow) provides additional rigidity for improved high-speed stability and overall handling
- 2 High-density groove design (red) increases traction edges for improved grip on wet and slippery surfaces
- 3 Closed shoulder tread design (green) improves tread block rigidity for better overall handling and minimized pattern noise



UTQG 500 A A






SPORT UTILITY VEHICLE

// S-PRO

A summer asymmetrical UHP designed for premium SUVs, the S-PRO features a new water groove design that minimizes pipe resonance for a more serene driving experience. The S-PRO also features a new hybrid profile design for maximized road contact and improved overall wear.



UTQG 280 AA A - 360 AA A
[See dealer for specific UTQG information]

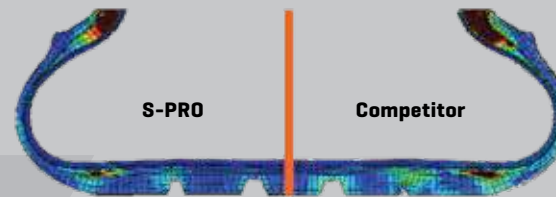

Tire Profile Comparison

Hybrid profile design maximizes road contact and improves overall tread wear.



- 1 Asymmetrical pattern with large outside shoulder blocks (green) for improved handling**
- 2 Patented groove design (red) minimizes pipe resonance for a quiet and serene cabin**
- 3 Four circumferential grooves (blue) improve water dispersion for better hydroplaning resistance**

MARAUDER // MA-S2

An all-season UHP tire designed for light trucks and SUVs, the MA-S2 was engineered to deliver Maxxis UHP handling on much bigger vehicles. The construction design uses high-strength materials for improved lateral stability and handling, while the aggressive V pattern design helps improve all-season performance. The MA-S2 also features a pronounced rim protector to help prevent wheel damage when parking near curbs.



- 1 Central Rib Design (purple)**
Improves stability at higher speeds.
- 2 V Groove Design (yellow)**
Increases water dispersion for improved hydroplaning resistance.
- 3 Multiple Lateral Groove Design (blue)**
Increases water dispersion under cornering for improved wet weather driving confidence.
- 4 3D Groove Edge Design (green)**
Increases tread block stiffness for improved pattern wear performance.



M&S All-season rated
UTQG 360 A A

ESCAPADE // CUV

A performance touring tire for crossover vehicles, the Escapade CUV was designed for drivers who want sports car handling in a crossover. The tire features adaptive response sidewall technology, delivering great comfort around town and responsive handling in turns. The Escapade CUV also features multi-pitch tread blocks for minimal pattern noise in the cabin and a premium driving experience.



M&S All-season rated
UTQG 520 A A

1 ARS Comfort Zone

Utilizing a low turn-up casing design, this section of the sidewall is compliant and absorbs bumps and road imperfections, delivering a smooth ride when driving casually around town.

2 ARS Sports Zone

Utilizing unique materials and sidewall design, this section of the sidewall is rigid and provides great cornering performance, delivering the handling and response similar to that of sports cars.




BRAVO // HP-M3

An all-season premium touring tire with crossover and SUV fitments, the HP-M3 was designed as an all-around performer in dry and wet conditions as well as light snow. The HP-M3 features cross-hatch sipes across the tread for added traction on slippery surfaces, while the four circumferential grooves improve hydroplaning resistance.




- 1 Solid center rib design provides better high-speed stability
- 2 Four wide circumferential rain grooves improve hydroplaning resistance
- 3 Multi-Pitch tread block design provides virtual white noise to drown out pattern noise

WET BRAKING IMPROVES 1.2% Speed: 80-0km/h

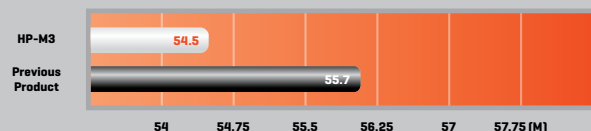

WET HANDLING IMPROVES 4.8%

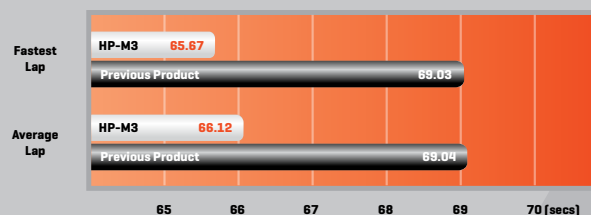

M&S All-season rated
UTQG 560 A A, 700 A A
[See dealer for specific UTQG information]

PRAGMATRA // MP-15

A standard touring tire for crossover/SUV vehicles, the MP-15 was optimized for class-leading mileage performance with a 15 percent improvement over the leading competitor. For additional peace of mind, the engineers designed a 5-rib tread design with 3D chamfers for additional stability as well as improvements in wet performance and pattern noise.



M&S All-season rated
UTQG 500 A A



- 1 Four circumferential grooves improve hydroplaning resistance**
- 2 3D chamfered rain grooves improve hydroplaning resistance and reduce pattern noise**
- 3 Advanced shoulder profile design optimizes road contact for improved handling and reduced pattern noise**
- 4 High density sipe arrangement provides additional traction edges for improved wet weather traction**





LIGHT TRUCK



BRAVO // HT-770

The Maxxis flagship highway terrain tire, the HT-770 development team improved on the finer details to create a tire worthy of being our flagship. Based on our motorsports experience, the team created a new sidewall design that delivers a supple ride while maintaining excellent stability under heavy braking and crosswinds. The engineers also utilized a closed shoulder pattern design and multi-pitch tread blocks to create a more serene driving experience.



M&S All-season rated
UTQG 640 A B [Non LT Sizes ONLY]

1 Dual Circumferential Grooves

The high-volume circumferential grooves increase water dispersion efficiency for improved hydroplaning resistance.

2 Multi-Pitch Tread Blocks

This technology works in a way similar to noise-canceling headphones. The shoulder blocks are designed to produce sounds that dampen annoying pattern noise so the cabin stays quiet and serene.

3 Closed Shoulder Design

The closed shoulder design limits noise resonance in the tread area, which further improves the overall driving experience.





BRAVO // AT-771

A premium all-terrain tire engineered to handle your favorite trail or work route, the AT-771 was designed to tackle asphalt, dirt, mud and everything in between. The unique pattern features wave siping and staggered shoulders for extra off-road traction, while the multi-pitch tread blocks minimize pattern noise for a refined driving experience.



M&S All-season rated
UTQG 500 A A - 500 A B [See dealer for specific UTQG information]

- 1 Four unique U-shaped circumferential grooves (blue) offer excellent hydroplaning resistance while minimizing rock retention
- 2 3D tread blocks (purple) provide additional tread stiffness to improve the overall wear pattern, stability and steering feel
- 3 Optimized sipe design (red) for improved wet performance and ride refinement
- 4 Multi-Pitch tread pattern design (gold) minimizes pattern and road noise while maintaining excellent off-road performance



BRAVO // AT-980


An all-terrain tire with a classic pattern, the AT-980 features a new construction design to maximize road contact even under heavy loads, as well as improving puncture and bruising resistance. The unique zig-zag block design provides extra traction edges for improved off-road performance.



M&S All-season rated
UTQG 500 A B [Non LT Sizes ONLY]


DRY BRAKING IMPROVES 1.6 M

Speed: 100-0km/h

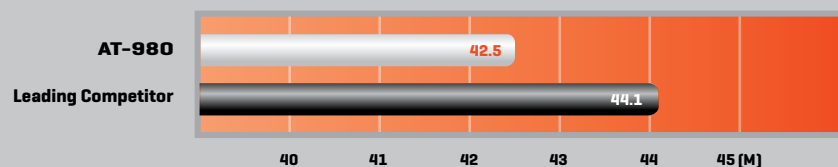

WET BRAKING IMPROVES 2.3 M

Speed: 80-0km/h

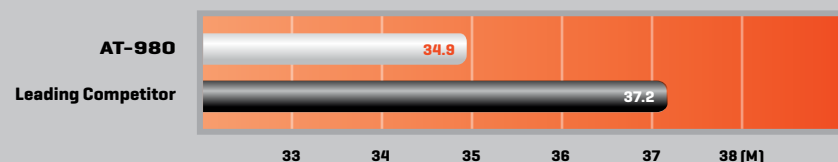

RAZR // MT

Our flagship mud terrain tire, the RAZR MT was engineered with know-how gained from Maxxis' involvement in off-road racing. The RAZR MT features a new off-road compound with new chemical fillers for maximum tear and chip resistance as well as tread life. Innovative armor sidewall design maximizes sidewall traction and puncture resistance, while the new dual core body-ply technology, packing additional casing strength for superior durability and toughness.



M&S All-season rated



- 1 New pattern design featuring deeply sculptured center blocks (blue) that maximize off-road traction while retaining a quieter ride
- 2 Innovative armor sidewall design (yellow) maximizes sidewall traction and puncture resistance
- 3 New off-road compound featuring new chemical fillers for maximum tear resistance and tread life

Maxxis dual-cord casing ply features intertwined reinforcement fibers, dramatically improving casing strength for superior durability and toughness



New chemical fillers in the tread compound increase molecular toughness and create a difficult path for cracks to propagate. This results in improved cut/chip resistance during off-road driving



Traditional Compound



HSR Filler Compound

BIGHORN // MT-764

A premium mud terrain tire with a motor sports pedigree, the MT-764 features the same tough, durable construction design but improves off-road performance with a new aggressive pattern that improves self-cleaning performance in mud. The shoulders feature staggered lugs for additional bite when sidewall traction is needed.



- 1 Serrated Shoulder Block**
Provides additional side bite in difficult off-road situations.
- 2 Rugged Sidewall Blocks**
Aggressive sidewall blocks increase puncture resistance and improve traction in deep mud.



M&S All-season rated





EXTREME OFF-ROAD

CREEPY CRAWLER // M8090

Designed to conquer slightly different terrain than the Trepador Bias, the Creepy Crawler also features a conformable bias-ply casing to maximize the contact patch on uneven off-road terrain. The unique pattern and sidewall design excel on mud and rocky terrain.



M&S All-season rated

- **Special bias-ply construction design allows the M8090 to conform to varying terrain surfaces for maximum rock-crawling performance**
- **Stone ejectors provide protection against tread cap damage from sharp rocks**
- **Unique multi-edged knob design and sipe arrangement enhance traction on slippery surfaces**
- **Large shoulder lugs and sidewall design provide unparalleled side bite in difficult off-road terrain**
- **Multi-stage staggered shoulder pattern provides improved side bite on difficult terrain**
- **DOT-approved for highway use**

TREPADOR BIAS // M8060

Designed to conquer off-road terrain with ease, the Trepador Bias features a conformable bias-ply casing with an ultra-aggressive sidewall design for excellent off-road traction on sand and rocks. To improve on-road stability and performance, the tire also features a nylon belt reinforcement for extra high-speed stability while also improving puncture resistance.

- **Heavy-duty bias ply construction for excellent durability and tread flexibility**
- **Multi-curve tread siping improves traction on loose dirt and slippery terrain**
- **Unique tread element arrangement ensures a uniform contact area for maximum road contact**
- **Aggressive side lug design provides improved side-bite on difficult off-road and rocky terrain**
- **Nylon belt-reinforced tire construction improves puncture resistance and high-speed stability**
- **DOT-approved for highway use**



M&S All-season rated

TREPADOR COMP. // M8060



Based on the Trepador Bias, the legendary Trepador Competition uses the same construction and pattern design, but it features a sticky race tread compound for the ultimate in off-road traction. Due to the nature of the compound, it is not recommended for use in winter conditions.

- Heavy-duty bias-ply construction for excellent durability and tread flexibility
- Aggressive soft competition tread compound for ultimate off-road traction
- Multi-curve tread siping improves traction on loose dirt and slippery terrain
- Unique tread element arrangement ensures uniform contact area for maximum road contact
- Aggressive side lug design provides improved side-bite on difficult off-road and rocky terrain
- Nylon belt-reinforced tire construction improves puncture resistance and high-speed stability
- Do not use in winter conditions - please visit www.maxxis.com for more details
- Recommended for competition use only

TREPADOR RADIAL // M8060

Designed for the rigors of high-speed off-roading, the Trepador Radial features high-strength materials in a robust radial design for maximum puncture resistance and high-speed stability. Staggered shoulder blocks and multi-curve siping provide extra traction edges for additional traction bite on difficult terrain.

- Aggressive directional tread design provides excellent traction on and off-road
- Multi-curve siping improves traction on loose dirt and other slippery surfaces
- Arrangement ensures a uniform contact area for sure-footed handling
- Jointless spiral-wound cap-ply maximizes ride refinement and durability
- Multi-stage staggered shoulder pattern provides improved side bite on difficult terrain
- Nylon belt-reinforced tire construction improves puncture resistance and prolongs tread life
- DOT-approved for highway use



M&S All-season rated





WINTER

ARCTIC TREKKER // NP-3


A studdable ice tire featuring a square shoulder design for enhanced grip in difficult icy and snowy conditions.




M&S/Mountain Snowflake symbol certification



Conventional sipes allow the tread block to move and squirm freely. This causes abnormal wear.



New 3D ripple sipes form an interlocking mechanism to minimize unnecessary movement and promote even tread wear.



- 1 Unique individual shoulder block design (green)**
Provides extra traction edges for enhanced traction in the snow.
- 2 3D ripple sipes and optimized stud holes (red)**
Improve overall winter performance.

PREMITRA // NS-5

Our flagship studdable ice tire, the new NS-5 takes winter traction to a different level with all-new technologies. The new tire features an innovative rubber suction stud design for improved ice traction, while the aggressive saw-tooth tread blocks cut through snow for improved snow traction. In an effort to improve efficiency, the engineers worked on optimizing the shoulder design for minimal aerodynamic drag as well as a new bead filler compound for minimized rolling resistance.

- 1 New innovative rubber suction stud design provides extra bite into icy surfaces for improved ice traction
- 2 Saw-tooth block and high-density sipe arrangement for improved grip on snow and ice
- 3 New shoulder design optimized for maximum aerodynamic and fuel efficiency




M&S/Mountain Snowflake symbol certification

ARCTIC TREKKER // SP-02

A modern ice tire featuring a saw-tooth tread pattern for superior handling and traction in European winter conditions.



M&S/Mountain Snowflake symbol certification

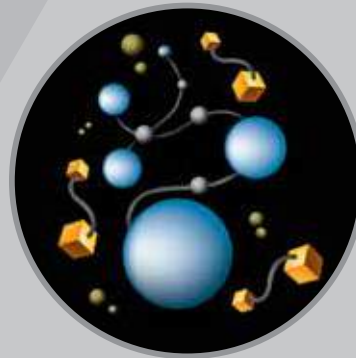

Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.




- 1 Saw-tooth pattern design (blue) digs into snow to offer superior handling and traction
- 2 Bridged shoulder blocks (green) increase tread stiffness and improve tread contact and cornering stability
- 3 New 3D ripple sipes (red) form an interlocking mechanism to minimize unnecessary movement and promote even tread wear

PREMITRA // SP-03

Introducing a new family of winter ice tires, the Premitra SP-03 features a high-dispersion silica compound for improved traction under challenging winter conditions. The tire also features our new honeycomb sipe design, which provides additional traction edges in multiple directions to enhance traction under all driving conditions.



- 1 High-dispersion silica compound (blue) lowers compound operating temperature range for maximum traction under winter conditions**
- 2 New honeycomb sipe design (red) adds traction edges in multiple directions to ensure great traction under all driving conditions**
- 3 3D wave sipe design (yellow) on the tread center rib to enhance traction edge under braking and acceleration for additional peace of mind**



Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.



M&S/Mountain Snowflake symbol certification

PRESA // SS-01

A modern SUV ice tire featuring a saw-tooth tread pattern for superior handling and traction.



M&S/Mountain Snowflake symbol certification




- 1 Saw-tooth edged blocks (green) increase surface bite for improved traction
- 2 Step down shoulder block design (blue) increases side bite for improved traction in deep and heavy snow




- 3 Unique groove design (blue) maximizes water and snow evacuation, ensuring good road contact for improved traction
- 4 High-density 3D ripple sipes (red) increase traction edges on the tread surface for improved traction under acceleration and braking

ARCTIC TREKKER // AP-2

A true European all-season winter tire featuring the latest snow compound and construction for improved high-speed stability and handling.

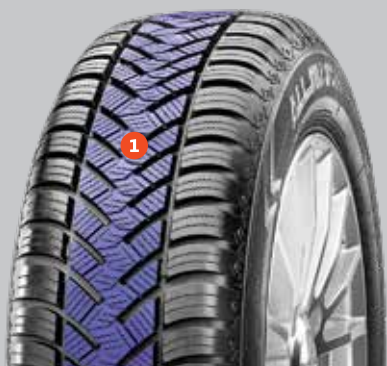

- 1** Saw-tooth pattern design digs into snow to offer superior handling and traction



Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.



M&S/Mountain Snowflake symbol certification

VANSMART A/S // AL2


Designed as a new age all-season tire for vans, the new AL2 utilizes the latest in compound technology to improve wet and winter traction while minimizing rolling resistance. The tire also features new siping design to improve overall traction on slippery surfaces.



M&S/Mountain Snowflake symbol certification



- 1 Reinforced shoulder block design (blue) improves overall wear and durability
- 2 Three wide circumferential grooves (yellow) improve hydroplaning resistance
- 3 Open shoulder groove design (orange) enhances wet handling
- 4 Multi-angle sipe design (green) improves traction under difficult winter conditions



New all-season triple-polymer compound combines three separately engineered rubber compounds to improve winter traction and handling. The new tread compound also features highly dispersible nano-silica to improve wet performance.


- Low Temperature Rubber
- High Reactive Rubber
- Ultra Elastic Rubber
- Highly Dispersible Nano-Silica
- Coupling Agent

ARCTIC TREKKER // WP-05

A premium passenger snow tire designed to tackle tough winter weather for maximum peace of mind.



1 Directional V Tread pattern increases water and snow dispersion for improved traction under slippery conditions



Highly dispersible silica in Maxxis' new compound promotes excellent filler dispersion - minimizing heat generation and energy dissipation for improved rolling resistance.



M&S/Mountain Snowflake symbol certification

VANSMART SNOW // WL2


Designed as a modern winter tire for vans, the new WL2 uses our latest nano-silica compound technology to improve winter traction and tread wear. The WL2 also features a new pattern design with high-density 3D wave sipes to improve all-weather handling and braking performance.



M&S/Mountain Snowflake symbol certification



- 1 Reinforced shoulder block design (blue) improves overall wear and durability
- 2 Three wide circumferential grooves (yellow) improve hydroplaning resistance
- 3 Open shoulder groove design (orange) enhances wet handling
- 4 Multi-angle sipe design (green) improves traction under difficult winter conditions



Winter Road Surface

New winter tread compound combines 2 unique rubber compounds into one to improve traction on snow and ice surfaces. The new tread compound also features highly dispersible nano-silica to improve wet performance.



Low Temperature Rubber



Highly Dispersible Nano-Silica



Coupling Agent

PRESA // MA-SLW

A commercial, studdable winter tire designed to tackle the toughest winter conditions.

- **Directional tread pattern, pinned for studs**
- **Reinforced tread blocks minimize tread squirm and enhance overall traction for sure-footed handling**
- **Saw-tooth tread block design digs into snow for extra traction**
- **Multi-pitch tread block design minimizes pattern noise**



M&S/Mountain Snowflake symbol certification





COMMERCIAL



BRAVO // UE-168(N)

Well-known for its durability, the UE-168 features a tough construction design with high-end rugged materials. The rib pattern design improves overall tread wear, while the shoulder grooves help improve all-season traction in inclement weather.


- **Double steel-belted construction for long-lasting wear and uniformity**
- **Jointless spiral-wound cap ply maximizes ride refinement and durability**
- **Rib-type tread design with deep shoulder grooves provides all-season capability**
- **Continuous shoulder ribs provide smooth, even tread wear and increased tread life**
- **Premium rubber compound and extra plies resist cuts, punctures and abrasions**
- **Extra heavy-duty sidewall construction delivers responsive handling and performance in demanding commercial applications**

VANSMART // MCV3+


Designed for European commercial vehicles, the MCV3+ improves upon the already successful MCV3 while also reducing rolling resistance. The MCV3+ uses a new silica compound to minimize rolling resistance and improve wet traction, while the new bead filler improves overall durability and ride comfort. The MCV3+ also features a new, thinner steel belt design to further reduce rolling resistance.



- 1 New silica tread compound reduces rolling resistance and improves wet traction**



- 2 New thinner steel belt design reduces rolling resistance while retaining casing durability**

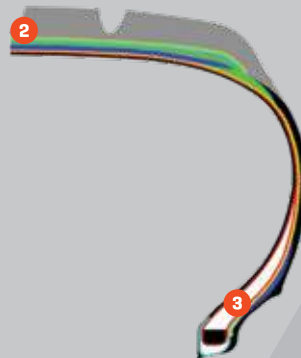

- 3 New bead filler design enhances durability while reducing rolling resistance**





TIRE SPECIFICATIONS



VICTRA // RC-1

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/50ZR15	86W	BSW	22.9	8.6	5.5	6.5	7.5	6/32	1168	51
225/45ZR15	87W	BSW	22.8	9.1	7.0	7.5	8.5	6/32	1201	51
245/40ZR15	88W	BSW	22.5	9.8	8.0	8.5	9.5	6/32	1235	51
225/45ZR17	94W XL	BSW	24.8	9.1	7.0	7.5	8.5	6/32	1477	50
235/40ZR17	90W	BSW	24.3	9.6	8.0	8.5	9.5	6/32	1323	51
245/45ZR17	99W XL	BSW	25.5	9.8	7.5	8.0	9.0	6/32	1709	50
255/40ZR17	94W	BSW	24.8	10.5	8.5	9.0	10.0	6/32	1477	51
275/35ZR17	94W	BSW	24.6	10.9	9.0	9.5	11.0	6/32	1477	51
275/40ZR17	98W	BSW	25.6	10.9	9.0	9.5	11.0	6/32	1653	51
235/40ZR18	91W	BSW	25.5	9.7	8.0	8.5	9.5	6/32	1356	51
265/35ZR18	97W XL	BSW	25.5	10.9	9.0	9.5	10.5	6/32	1609	50
275/35ZR18	99W XL	BSW	25.4	11.2	9.0	9.5	11.0	6/32	1709	50



VICTRA // R-19

Tire Size	Service Description	Compound	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175/65R14	82Q	HARD	BSW	23.1	6.9	5.0	5.0	6.0	13/32	1047	44
175/65R14	82Q	MEDIUM	BSW	23.1	6.9	5.0	5.0	6.0	13/32	1047	44
175/65R14	82Q	SOFT	BSW	23.1	6.9	5.0	5.0	6.0	13/32	1047	44
185/65R14	86Q	HARD	BSW	23.5	7.3	5.0	5.5	6.5	13/32	1168	44
185/65R14	86Q	MEDIUM	BSW	23.5	7.3	5.0	5.5	6.5	13/32	1168	44
185/65R14	86Q	SOFT	BSW	23.5	7.3	5.0	5.5	6.5	13/32	1168	44
185/65R15	88Q	HARD	BSW	24.6	7.3	5.0	5.5	6.5	13/32	1235	44
185/65R15	88Q	MEDIUM	BSW	24.6	7.3	5.0	5.5	6.5	13/32	1235	44
185/65R15	88Q	SOFT	BSW	24.6	7.3	5.0	5.5	6.5	13/32	1235	44
195/65R15	91Q	HARD	BSW	25.1	7.7	5.5	6.0	7.0	13/32	1356	44
195/65R15	91Q	MEDIUM	BSW	25.1	7.7	5.5	6.0	7.0	13/32	1356	44
195/65R15	91Q	SOFT	BSW	25.1	7.7	5.5	6.0	7.0	13/32	1356	44
205/65R15	94Q	HARD	BSW	25.6	8.1	5.5	6.0	7.5	13/32	1477	44
205/65R15	94Q	MEDIUM	BSW	25.6	8.1	5.5	6.0	7.5	13/32	1477	44
205/65R15	94Q	SOFT	BSW	25.6	8.1	5.5	6.0	7.5	13/32	1477	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // R-19 continued



Tire Size	Service Description	Compound	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175/65R14	82Q	HARD	BSW	23.1	6.9	5.0	5.0	6.0	13/32	1047	44
175/65R14	82Q	MEDIUM	BSW	23.1	6.9	5.0	5.0	6.0	13/32	1047	44
175/65R14	82Q	SOFT	BSW	23.1	6.9	5.0	5.0	6.0	13/32	1047	44
185/65R14	86Q	HARD	BSW	23.5	7.3	5.0	5.5	6.5	13/32	1168	44
185/65R14	86Q	MEDIUM	BSW	23.5	7.3	5.0	5.5	6.5	13/32	1168	44
185/65R14	86Q	SOFT	BSW	23.5	7.3	5.0	5.5	6.5	13/32	1168	44
185/65R15	88Q	HARD	BSW	24.6	7.3	5.0	5.5	6.5	13/32	1235	44
185/65R15	88Q	MEDIUM	BSW	24.6	7.3	5.0	5.5	6.5	13/32	1235	44
185/65R15	88Q	SOFT	BSW	24.6	7.3	5.0	5.5	6.5	13/32	1235	44
195/65R15	91Q	HARD	BSW	25.1	7.7	5.5	6.0	7.0	13/32	1356	44
195/65R15	91Q	MEDIUM	BSW	25.1	7.7	5.5	6.0	7.0	13/32	1356	44
195/65R15	91Q	SOFT	BSW	25.1	7.7	5.5	6.0	7.0	13/32	1356	44
205/65R15	94Q	HARD	BSW	25.6	8.1	5.5	6.0	7.5	13/32	1477	44
205/65R15	94Q	MEDIUM	BSW	25.6	8.1	5.5	6.0	7.5	13/32	1477	44
205/65R15	94Q	SOFT	BSW	25.6	8.1	5.5	6.0	7.5	13/32	1477	44

VICTRA // VR-1



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/50ZR15	86W	BSW	23.1	8.4	5.5	6.5	7.5	9/32	1168	51
225/45ZR15	87W	BSW	23.0	8.8	7.0	7.5	8.5	9/32	1202	51
245/40ZR15	88W	BSW	22.7	9.8	8.0	8.5	9.5	9/32	1235	51
205/55R16	91V	BSW	24.8	8.3	5.5	6.5	7.5	9/32	1356	51
215/40ZR16	86W XL	BSW	22.8	8.6	7.0	7.5	8.5	6/32	1169	50
215/40ZR17	83W	BSW	23.7	8.6	7.0	7.5	8.5	9/32	1074	51
225/45ZR17	94W XL	BSW	25.2	8.9	7.0	7.5	8.5	9/32	1477	50
245/40ZR17	95W XL	BSW	24.7	9.7	8.0	8.5	9.5	9/32	1521	50
255/40ZR17	94W	BSW	25.0	10.2	8.5	9.0	10.0	9/32	1477	51
225/40ZR18	88W	BSW	25.2	9.1	7.5	8.0	9.0	9/32	1235	51
245/40ZR18	93W	BSW	25.7	9.7	8.0	8.5	9.5	9/32	1433	51
255/35ZR18	94W XL	BSW	25.0	10.4	8.5	9.0	10.0	9/32	1477	50
265/35ZR18	97W XL	BSW	25.5	10.8	9.0	9.5	10.5	9/32	1609	50
275/35ZR18	99W XL	BSW	25.7	11.1	9.0	9.5	11.0	9/32	1709	50
285/35ZR18	101W XL	BSW	25.9	11.6	9.5	10.0	11.0	9/32	1819	50
295/40ZR18	103W	BSW	27.4	11.9	10.0	10.5	11.5	9/32	1929	51

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // M36+



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/55ZRF16	91W	BSW	24.9	8.1	5.5	6.5	7.5	10/32	1356	51
225/50RF16	92V	BSW	24.9	8.5	6.0	7.0	8.0	10/32	1389	44
225/55ZRF16	95W	BSW	25.7	8.5	6.0	7.0	8.0	10/32	1521	51
205/50ZRF17	93W	BSW	25.1	8.1	5.5	6.5	7.5	10/32	1433	50
225/45ZRF17	91W	BSW	25.0	8.9	7.0	7.5	8.5	10/32	1356	51
225/50ZRF17	94W	BSW	25.9	8.9	6.0	7.0	8.0	10/32	1477	51
225/55ZRF17	97W	BSW	26.8	8.9	6.0	7.0	8.0	10/32	1609	51
245/45ZRF17	95W	BSW	25.7	9.6	7.5	8.0	9.0	10/32	1521	51
225/45ZRF18	91W	BSW	25.9	9.6	7.0	7.5	8.5	10/32	1356	51
245/40ZRF18	93W	BSW	25.7	9.6	8.0	8.5	9.5	10/32	1433	51
245/45ZRF18	96W	BSW	26.7	9.6	7.5	8.0	9.0	10/32	1565	51
245/50ZRF18	100W	BSW	27.7	9.6	7.0	7.5	8.5	10/32	1763	51
255/40ZRF18	95W	BSW	26.0	10.0	8.5	9.0	10.0	10/32	1521	51

VICTRA // VS-01



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/45ZR16	87W XL	BSW	23.1	8.1	6.5	7.0	7.5	11/32	1201	50
205/55ZR16	94W XL	BSW	24.9	8.1	5.5	6.5	7.5	11/32	1477	50
215/40ZR16	86W XL	BSW	22.8	8.5	7.0	7.5	8.5	11/32	1168	50
215/55ZR16	97W XL	BSW	25.3	8.5	6.0	7.0	7.5	11/32	1609	50
195/40R17	81W XL	BSW	23.1	7.7	6.5	7.0	7.5	10/32	1019	50
205/40ZR17	84W XL	BSW	23.5	8.1	7.0	7.5	8.0	11/32	1102	50
205/45ZR17	88W XL	BSW	24.3	8.1	6.5	7.0	7.5	11/32	1235	50
205/50ZR17	93Y XL	BSW	25.1	8.1	5.5	6.5	7.5	11/32	1433	50
215/40R17	87Y XL	BSW	23.8	8.5	7.0	7.5	8.5	10/32	1201	50
215/45ZR17	91Y XL	BSW	24.6	8.5	7.0	7.0	8.0	11/32	1356	50
225/45ZR17	94Y XL	BSW	24.8	8.9	7.0	7.5	8.5	11/32	1477	50
235/40R17	94Y XL	BSW	24.4	9.3	8.0	8.5	9.5	10/32	1477	50
235/45ZR17	97Y XL	BSW	25.4	9.3	7.5	8.0	9.0	11/32	1609	50
245/40ZR17	91Y XL	BSW	24.7	9.6	8.0	8.5	9.5	11/32	1521	50
245/45ZR17	99Y XL	BSW	25.6	9.6	7.5	8.0	9.0	10/32	1709	50
255/40R17	98Y XL	BSW	25.0	10.0	8.5	9.0	10.0	10/32	1653	50
255/45ZR17	98W	BSW	26.0	10.0	8.0	8.5	9.5	10/32	1653	51
205/40R18	86Y XL	BSW	24.4	8.1	7.0	7.5	8.0	10/32	1168	50
215/35ZR18	84Y XL	BSW	24.0	8.5	7.0	7.5	8.5	10/32	1102	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // VS-01 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
215/40R18	89Y XL	BSW	24.8	8.5	7.0	7.5	8.5	10/32	1279	50
215/45ZR18	93Y XL	BSW	25.6	8.5	7.0	7.0	8.0	11/32	1433	50
225/35ZR18	87Y XL	BSW	24.3	8.9	7.5	8.0	9.0	10/32	1201	50
225/40ZR18	92Y XL	BSW	25.0	8.9	7.5	8.0	9.0	11/32	1389	50
225/45ZR18	95Y XL	BSW	25.9	8.9	7.0	7.5	8.5	11/32	1521	50
235/40ZR18	95Y XL	BSW	25.4	9.3	8.0	8.5	9.5	11/32	1521	50
235/45ZR18	94Y XL	BSW	26.3	9.3	7.5	8.0	9.0	11/32	1653	50
245/35ZR18	92Y XL	BSW	24.8	9.6	8.0	8.5	9.5	10/32	1389	50
245/40ZR18	97Y XL	BSW	25.8	9.6	8.0	8.5	9.5	11/32	1609	50
245/45ZR18	100Y XL	BSW	26.6	9.6	7.5	8.0	9.0	11/32	1764	50
255/35ZR18	94Y XL	BSW	25.0	10.0	8.5	9.0	10.0	10/32	1477	50
255/40R18	99Y XL	BSW	26.0	10.0	8.5	9.0	10.0	10/32	1709	50
265/35R18	97Y XL	BSW	25.3	10.4	9.0	9.5	10.5	10/32	1609	50
265/40ZR18	97Y XL	BSW	26.3	10.4	9.0	9.5	10.5	11/32	1819	50
275/35R18	99Y XL	BSW	25.6	10.8	9.0	9.5	11.0	10/32	1709	50
275/40R18	103Y XL	BSW	26.7	10.8	9.0	9.5	11.0	10/32	1929	50
275/45ZR18	107Y XL	BSW	27.8	10.8	8.5	9.0	10.5	11/32	2149	50
285/35R18	101Y XL	BSW	25.9	11.2	9.5	10.0	11.0	10/32	1819	50
225/35ZR19	88Y XL	BSW	25.2	8.9	7.5	8.0	9.0	10/32	1235	50
225/40R19	93Y XL	BSW	26.1	8.9	7.5	8.0	9.0	10/32	1433	50
235/35ZR19	91Y XL	BSW	25.5	9.3	8.0	8.5	9.5	10/32	1356	50
235/40R19	96Y XL	BSW	26.4	9.3	8.0	8.5	9.5	10/32	1565	50
245/35ZR19	93Y XL	BSW	25.8	9.6	8.0	8.5	9.5	10/32	1433	50
245/40ZR19	94Y XL	BSW	26.7	9.6	8.0	8.5	9.5	11/32	1653	50
245/45ZR19	102Y XL	BSW	27.7	9.6	7.5	8.0	9.0	11/32	1874	50
255/35ZR19	96Y XL	BSW	26.1	10.0	8.5	9.0	10.0	10/32	1565	50
255/40ZR19	100Y XL	BSW	27.0	10.0	8.5	9.0	10.0	11/32	1764	50
255/45ZR19	104Y XL	BSW	28.1	10.0	8.0	8.5	9.5	11/32	1984	50
265/35R19	98Y XL	BSW	26.3	10.4	9.0	9.5	10.5	10/32	1653	50
275/35ZR19	100Y XL	BSW	26.6	10.8	9.0	9.5	11.0	10/32	1764	50
275/40ZR19	101Y XL	BSW	27.7	10.8	9.0	9.5	11.0	11/32	2039	50
285/40R19	107Y XL	BSW	28.0	11.2	9.5	10.0	11.0	10/32	2149	50
245/35R20	95Y XL	BSW	26.8	9.6	8.0	8.5	9.5	10/32	1521	50
245/40R20	95Y	BSW	27.7	9.6	8.0	8.5	9.5	10/32	1521	51
255/35R20	97Y XL	BSW	27.0	10.0	8.5	9.0	10.0	10/32	1609	50
275/35R20	102Y XL	BSW	27.6	10.8	9.0	9.5	11.0	10/32	1874	50
265/45ZR21	104W	BSW	30.3	10.4	8.5	9.0	10.0	10/32	1984	51

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // MA-Z3



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
165/50R15	72V	BSW	21.7	6.5	4.5	5.0	6.0	10/32	783	44
195/45ZR15	78W	BSW	21.9	7.6	6.0	6.5	7.5	9/32	937	51
195/50R15	86V XL	BSW	22.8	7.7	5.5	6.0	7.0	9/32	1168	50
195/55R15	85V	BSW	23.4	7.6	5.5	6.0	7.0	9/32	1135	44
205/50R15	89V XL	BSW	23.2	8.2	5.5	6.5	7.5	10/32	1279	50
205/55R15	88V	BSW	23.8	8.2	5.5	6.5	7.5	9/32	1235	44
195/45R16	84V XL	BSW	23.1	7.4	6.0	6.5	7.5	9/32	1102	50
195/50R16	88V XL	BSW	23.7	7.8	5.5	6.0	7.0	9/32	1235	50
195/55R16	91V	BSW	24.5	7.6	5.5	6.0	7.0	9/32	1356	50
205/40R16	83W XL	BSW	22.4	8.4	7.0	7.5	8.0	9/32	1074	50
205/45R16	87W XL	BSW	23.4	8.1	6.5	7.0	7.5	9/32	1201	50
205/50R16	91W XL	BSW	24.2	8.2	5.5	6.5	7.5	9/32	1356	50
205/55R16	94W XL	BSW	24.9	8.2	5.5	6.5	7.5	9/32	1477	50
215/40R16	86W XL	BSW	22.8	8.6	7.0	7.5	8.5	9/32	1168	50
215/55R16	97W XL	BSW	25.3	8.7	6.0	7.0	7.5	9/32	1609	50
225/45R16	93W XL	BSW	24.1	9.0	7.0	7.5	8.5	9/32	1433	50
225/50R16	96W XL	BSW	24.8	9.0	6.0	7.0	8.0	9/32	1565	50
225/55ZR16	99W XL	BSW	25.7	9.0	6.0	7.0	8.0	10/32	1709	50
205/40R17	84W XL	BSW	23.5	8.2	7.0	7.5	8.0	10/32	1102	50
205/45R17	88W XL	BSW	24.3	8.0	6.5	7.0	7.5	9/32	1235	50
205/50R17	93W XL	BSW	25.3	8.3	5.5	6.5	7.5	9/32	1432	50
215/40R17	87W XL	BSW	23.9	8.6	7.0	7.5	8.5	9/32	1201	50
215/45R17	91W XL	BSW	24.7	8.4	7.0	7.0	8.0	9/32	1356	50
215/50R17	91W	BSW	25.5	8.7	6.0	7.0	7.5	9/32	1356	51
215/55ZR17	98W XL	BSW	26.4	8.6	6.0	7.0	7.5	10/32	1653	50
225/45R17	94W XL	BSW	25.1	8.7	7.0	7.5	8.5	9/32	1477	50
225/55R17	101W XL	BSW	26.8	8.8	6.0	7.0	8.0	9/32	1819	50
235/40R17	94W XL	BSW	24.4	9.7	8.0	8.5	9.5	10/32	1477	50
235/45R17	97W XL	BSW	25.4	9.2	7.5	8.0	9.0	10/32	1609	50
245/40R17	95W XL	BSW	24.6	9.7	8.0	8.5	9.5	10/32	1521	50
245/45R17	99W XL	BSW	25.7	9.5	7.5	8.0	9.0	10/32	1709	50
255/40R17	98W XL	BSW	25.0	10.2	8.5	9.0	10.0	10/32	1653	50
275/40R17	98W	BSW	25.7	10.7	9.0	9.5	11.0	10/32	1653	51
225/40R18	92W XL	BSW	25.2	9.0	7.5	8.0	9.0	10/32	1389	50
225/45R18	95W XL	BSW	26.1	8.8	7.0	7.5	8.5	9/32	1521	50
235/40R18	95W XL	BSW	25.4	9.5	8.0	8.5	9.5	10/32	1521	50
235/50R18	101W XL	BSW	27.2	9.4	6.5	7.5	8.5	10/32	1819	50
245/40R18	97W XL	BSW	25.7	9.6	8.0	8.5	9.5	10/32	1609	50
245/45R18	100W XL	BSW	26.7	9.5	7.5	8.0	9.0	10/32	1764	50
255/45R18	103W XL	BSW	27.1	10.1	8.0	8.5	9.5	10/32	1929	50
265/35R18	97W XL	BSW	25.3	10.7	9.0	9.5	10.5	10/32	1609	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // MA-Z4S



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/60R14	88W	BSW	23.7	8.1	5.5	6.0	7.5	10/32	1235	51
195/50R15	86V XL	BSW	22.7	7.7	5.5	6.0	7.0	10/32	1168	50
195/55R15	85V	BSW	23.8	7.7	5.5	6.0	7.0	10/32	1135	44
205/50R15	89V XL	BSW	23.1	8.1	5.5	6.5	7.5	10/32	1290	50
225/50R15	95V XL	BSW	23.9	8.9	6.0	7.0	8.0	10/32	1521	50
225/60R15	96W	BSW	25.6	8.9	6.0	6.5	8.0	10/32	1565	51
185/55R16	83V	BSW	24.4	7.3	5.0	6.0	6.5	10/32	1074	44
195/50R16	88V XL	BSW	23.7	7.7	5.5	6.0	7.0	10/32	1235	50
195/55R16	91V XL	BSW	24.5	7.7	5.5	6.0	7.0	10/32	1356	50
205/40ZR16	83W XL	BSW	22.4	8.1	7.0	7.5	8.0	10/32	1074	50
205/45ZR16	87W XL	BSW	23.4	8.1	6.5	7.0	7.5	10/32	1201	50
205/50R16	91V XL	BSW	24.1	8.1	5.5	6.5	7.5	10/32	1356	50
205/55R16	94V XL	BSW	24.9	8.1	5.5	6.5	7.5	10/32	1477	50
215/45R16	86W	BSW	23.6	8.5	7.0	7.0	8.0	10/32	1168	44
215/55R16	97V XL	BSW	25.3	8.5	6.0	7.0	7.5	10/32	1609	50
225/50R16	96V XL	BSW	24.9	8.9	6.0	7.0	8.0	10/32	1565	50
225/55R16	99V XL	BSW	25.8	8.9	6.0	7.0	8.0	10/32	1709	50
245/50R16	97V	BSW	25.7	9.6	7.0	7.5	8.5	10/32	1609	44
195/40ZR17	81W XL	BSW	25.5	7.7	6.5	7.0	7.5	10/32	1019	50
195/45ZR17	85W XL	BSW	25.6	7.7	6.0	6.5	7.5	10/32	1135	50
205/40ZR17	84W XL	BSW	23.5	8.1	7.0	7.5	8.0	10/32	1102	50
205/45ZR17	88W XL	BSW	24.3	8.1	6.5	7.0	7.5	10/32	1235	50
205/50ZR17	93W XL	BSW	25.1	8.1	5.5	6.5	7.5	10/32	1433	50
215/40ZR17	87W XL	BSW	23.8	8.5	7.0	7.5	8.5	10/32	1201	50
215/45ZR17	91W XL	BSW	24.8	8.5	7.0	7.0	8.0	10/32	1356	50
215/50ZR17	95W XL	BSW	25.6	8.5	6.0	7.0	7.5	10/32	1521	50
225/45ZR17	94W XL	BSW	25.1	8.9	7.0	7.5	8.5	10/32	1477	50
225/50ZR17	98W XL	BSW	25.8	8.9	6.0	7.0	8.0	10/32	1653	50
225/55R17	101Q XL	BSW	26.6	9.4	6.0	7.0	8.0	10/32	1819	50
225/55ZR17	101W XL	BSW	26.8	8.9	6.0	7.0	8.0	10/32	1819	50
235/45ZR17	97W XL	BSW	25.4	9.3	7.5	8.0	9.0	10/32	1609	50
235/50ZR17	100W XL	BSW	27.3	9.3	6.5	7.5	8.5	10/32	1764	50
235/55ZR17	103W XL	BSW	27.4	9.3	6.5	7.5	8.5	10/32	1929	50
245/40ZR17	95W XL	BSW	24.7	9.6	8.0	8.5	9.5	10/32	1521	50
245/45ZR17	99W XL	BSW	25.7	9.6	7.5	8.0	9.0	10/32	1708	50
255/40ZR17	98W XL	BSW	25.0	10.0	8.5	9.0	10.0	10/32	1653	50
215/35ZR18	84W XL	BSW	23.9	8.5	7.0	7.5	8.5	10/32	1102	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // MA-Z4S continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
225/40ZR18	92W XL	BSW	25.2	8.9	7.5	8.0	9.0	10/32	1389	50
225/45ZR18	95W XL	BSW	27.8	8.9	7.0	7.5	8.5	10/32	1521	50
235/40ZR18	95W XL	BSW	25.4	9.3	8.0	8.5	9.5	10/32	1521	50
235/50ZR18	101W XL	BSW	28.3	9.3	6.5	7.5	8.5	10/32	1819	50
235/55ZR18	104W XL	BSW	28.4	9.3	6.5	7.5	8.5	10/32	1984	50
235/60ZR18	107W XL	BSW	28.5	9.3	6.5	7.0	8.5	10/32	2149	50
245/40ZR18	97W XL	BSW	25.7	9.6	8.0	8.5	9.5	10/32	1609	50
245/45ZR18	100W XL	BSW	28.5	9.6	7.5	8.0	9.0	10/32	1764	50
245/60R18	105V	BSW	29.6	9.6	7.0	7.0	8.5	10/32	2039	44
255/35ZR18	94W XL	BSW	28.7	10.0	8.5	9.0	10.0	10/32	1477	50
255/55ZR18	109W XL	BSW	29.1	10.0	7.0	8.0	9.0	10/32	2270	50
265/35ZR18	97W XL	BSW	25.4	10.4	9.0	9.5	10.5	10/32	1609	50
215/35ZR19	85W XL	BSW	25.0	8.5	7.0	7.5	8.5	10/32	1135	50
225/35ZR19	88W XL	BSW	25.3	8.9	7.5	8.0	9.0	10/32	1235	50
225/55ZR19	99W	BSW	28.9	8.9	6.0	7.0	8.0	10/32	1709	51
235/35ZR19	91W XL	BSW	29.0	9.3	8.0	8.5	9.5	10/32	1356	50
245/35ZR19	93W XL	BSW	29.3	9.6	8.0	8.5	9.5	10/32	1433	50
245/40ZR19	98W XL	BSW	29.4	9.6	8.0	8.5	9.5	10/32	1653	50
255/50ZR19	107W XL	BSW	30.0	10.0	7.0	8.0	9.0	10/32	2149	50
255/55ZR19	111W XL	BSW	30.1	10.0	7.0	8.0	9.0	10/32	2403	50
275/30ZR19	96W XL	BSW	30.4	10.8	9.0	9.5	10.0	10/32	1565	50
275/35ZR19	100W XL	BSW	30.5	10.8	9.0	9.5	11.0	10/32	1764	50
285/45R19	111V XL	BSW	29.1	11.2	9.0	9.5	10.5	10/32	2403	50
225/30ZR20	85W XL	BSW	25.4	8.9	8.0	8.0	8.0	10/32	1135	50
225/35ZR20	90W XL	BSW	26.2	8.9	7.5	8.0	9.0	10/32	1323	50
235/35ZR20	92W XL	BSW	30.0	9.3	8.0	8.5	9.5	10/32	1389	50
245/35ZR20	95W XL	BSW	26.5	9.6	8.0	8.5	9.5	10/32	1521	50
245/40ZR20	99W XL	BSW	27.7	9.6	8.0	8.5	9.5	10/32	1709	50
245/45R20	99W	BSW	28.7	9.6	7.5	8.0	9.0	10/32	1709	51
245/50ZR20	102W	BSW	29.8	9.6	7.0	7.5	8.5	10/32	1874	51
255/35ZR20	97W XL	BSW	27.0	10.0	8.5	9.0	10.0	10/32	1609	50
255/45R20	105V XL	BSW	29.1	10.0	8.0	8.5	9.5	11/32	2039	50
255/50ZR20	109W XL	BSW	30.2	10.0	7.0	8.0	9.0	10/32	2271	50
255/55ZR20	110W XL	BSW	31.1	10.0	7.0	8.0	9.0	10/32	2337	50
275/30ZR20	97W XL	BSW	31.4	10.8	9.0	9.5	10.0	10/32	1609	50
275/35ZR20	102W XL	BSW	31.5	10.8	9.0	9.5	11.0	10/32	1874	50
275/40R20	106V XL	BSW	28.7	10.8	9.0	9.5	11.0	11/32	2094	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // MA-Z4S continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
275/45R20	110V XL	BSW	29.8	10.8	8.5	9.0	10.5	11/32	2337	50
275/55R20	117V XL	BSW	31.9	10.8	7.5	8.5	9.5	11/32	2833	50
285/50R20	116V XL	BSW	31.3	11.2	8.0	9.0	10.0	11/32	2756	50
315/35ZR20	110W XL	BSW	28.8	12.4	10.5	11.0	12.5	11/32	2337	50
245/30ZR22	92W XL	BSW	27.8	9.6	8.0	8.5	9.0	10/32	1389	50
265/35ZR22	102V XL	BSW	29.4	10.4	9.0	9.5	10.5	10/32	1874	50
265/40R22	106V XL	BSW	30.4	10.4	9.0	9.5	10.5	11/32	2094	50
285/35R22	106V XL	BSW	33.9	11.2	9.5	10.0	11.0	10/32	2094	50
285/45R22	114V XL	BSW	34.1	11.2	9.0	9.5	10.5	10/32	2601	50
305/40R22	114V XL	BSW	31.6	12.0	10.0	11.0	12.0	11/32	2601	50
305/45R22	118V XL	BSW	32.8	12.0	9.5	10.0	11.5	11/32	2910	50
255/30ZR24	97W XL	BSW	30.1	10.0	8.5	9.0	9.5	10/32	1609	50
295/35R24	110V XL	BSW	32.1	11.6	10.0	10.5	11.5	11/32	2337	50
305/35ZR24	112V XL	BSW	32.6	12.0	10.0	11.0	12.0	11/32	2469	50

VICTRA // MA-511



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195/50R15	82V	BSW	22.8	7.9	5.5	6.0	7.0	10/32	1047	44
185/55R15	86V XL	BSW	23.1	7.5	5.0	6.0	6.5	10/32	1168	50
195/55R15	85V	BSW	23.4	7.8	5.5	6.0	7.0	10/32	1135	44
195/60R15	88V	BSW	24.4	7.9	5.5	6.0	7.0	10/32	1235	44
195/65R15	91V	BSW	25.1	8.0	5.5	6.0	7.0	10/32	1356	44
205/65R15	95H	BSW	25.5	8.2	5.5	6.0	7.5	10/32	1521	44
205/50R16	87W	BSW	24.1	8.2	5.5	6.5	7.5	10/32	1201	51
205/55R16	94W XL	BSW	24.8	8.2	5.5	6.5	7.5	10/32	1477	50
225/55R16	95W	BSW	25.7	9.0	6.0	7.0	8.0	10/32	1521	51
215/60R16	95V	BSW	26.3	8.7	6.0	6.5	7.5	10/32	1521	44
225/60R16	98V	BSW	26.7	8.9	6.0	6.5	8.0	10/32	1653	44
215/65R16	98H	BSW	27.1	8.7	6.0	6.5	7.5	10/32	1653	44
215/45R17	91W XL	BSW	24.7	8.2	7.0	7.0	8.0	10/32	1356	50
225/45R17	94W XL	BSW	25.0	8.7	7.0	7.5	8.5	0/32	1477	50
235/45R17	97W XL	BSW	25.3	9.2	7.5	8.0	9.0	10/32	1609	50
245/45R17	99W XL	BSW	25.7	9.4	7.5	8.0	9.0	10/32	1709	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VICTRA // MA-511 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/50R17	93W XL	BSW	25.3	8.2	5.5	6.5	7.5	10/32	1433	50
225/50R17	98W XL	BSW	25.9	8.9	6.0	7.0	8.0	10/32	1653	50
235/50R17	100W XL	BSW	26.3	9.5	6.5	7.5	8.5	10/32	1764	50
215/55R17	94W	BSW	26.3	8.7	6.0	7.0	7.5	10/32	1477	51
225/40R18	92W XL	BSW	25.3	8.8	7.5	8.0	9.0	10/32	1389	50
235/40R18	95W XL	BSW	25.4	9.5	8.0	8.5	9.5	10/32	1521	50
245/40R18	97W XL	BSW	25.8	9.6	8.0	8.5	9.5	10/32	1609	50
225/45R18	95W XL	BSW	26.1	8.7	7.0	7.5	8.5	10/32	1521	50
245/45R18	100W XL	BSW	26.7	9.4	7.5	8.0	9.0	10/32	1764	50
245/35R19	93W XL	BSW	25.9	9.6	8.0	8.5	9.5	10/32	1433	50
245/40R19	98W XL	BSW	26.8	9.6	8.0	8.5	9.5	10/32	1653	50

PREMITRA // HP5



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195/50R15	86V XL	BSW	22.7	7.7	5.5	6.0	7.0	10/32	1168	50
195/55R15	85V	BSW	23.5	7.7	5.5	6.0	7.0	10/32	1135	44
195/60R15	88V	BSW	24.3	7.7	5.5	6.0	7.0	10/32	1235	44
195/65R15	95V XL	BSW	25.0	7.7	5.5	6.0	7.0	10/32	1521	50
205/60R15	91H	BSW	24.7	8.3	5.5	6.0	7.5	10/32	1356	44
185/55R15	83V	BSW	24.0	7.3	5.0	6.0	6.5	10/32	1074	44
195/45R16	84V XL	BSW	22.9	7.7	6.0	6.5	7.5	10/32	1102	50
195/50R16	88V XL	BSW	23.7	7.7	5.5	6.0	7.0	10/32	1235	50
195/55R16	91V XL	BSW	24.5	7.7	5.5	6.0	7.0	10/32	1356	50
195/60R16	89V	BSW	25.3	8.0	5.5	6.0	7.0	10/32	1279	44
205/45ZR16	87W XL	BSW	23.2	8.1	6.5	7.0	7.5	10/32	1201	50
205/50ZR16	91W XL	BSW	24.1	8.1	5.5	6.5	7.5	10/32	1356	50
205/55ZR16	94W XL	BSW	24.9	8.1	5.5	6.5	7.5	10/32	1477	50
205/60R16	96V XL	BSW	25.7	8.1	5.5	6.0	7.5	10/32	1565	50
205/60R16	96W XL	BSW	25.7	8.3	5.5	6.0	7.5	10/32	1565	50
215/45R16	90V XL	BSW	23.6	8.5	7.0	7.0	8.0	10/32	1323	50
215/55R16	93V	BSW	25.4	8.5	6.0	7.0	7.5	10/32	1433	44
215/55ZR16	97W XL	BSW	25.4	8.1	6.0	7.0	7.5	10/32	1609	50
215/60ZR16	99W XL	BSW	26.2	8.5	6.0	6.5	7.5	10/32	1709	50
215/65R16	98V	BSW	27.0	8.5	6.0	6.5	7.5	10/32	1653	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

PREMITRA // HP5 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
225/50ZR16	92W	BSW	24.9	8.9	6.0	7.0	8.0	10/32	1389	51
225/55R16	95V	BSW	25.8	8.9	6.0	7.0	8.0	10/32	1521	44
225/55ZR16	99W XL	BSW	25.8	8.9	6.0	7.0	8.0	10/32	1709	50
225/60R16	98V	BSW	26.6	8.9	6.0	6.5	8.0	10/32	1653	44
205/40ZR17	84W XL	BSW	23.5	8.1	7.0	7.5	8.0	10/32	1102	50
205/45ZR17	88W XL	BSW	24.3	8.1	6.5	7.0	7.5	10/32	1235	50
205/50ZR17	93W XL	BSW	25.1	8.1	5.5	6.5	7.5	10/32	1433	50
205/55R17	95V XL	BSW	26.0	8.1	5.5	6.5	7.5	10/32	1521	50
215/40ZR17	87W XL	BSW	23.8	8.5	7.0	7.5	8.5	10/32	1201	50
215/45ZR17	91W XL	BSW	24.6	8.5	7.0	7.0	8.0	10/32	1356	50
215/50ZR17	95W XL	BSW	25.4	8.5	6.0	7.0	7.5	10/32	1521	50
215/55R17	98W XL	BSW	26.4	8.5	6.0	7.0	7.5	10/32	1653	50
215/60R17	96H	BSW	27.2	8.5	6.0	6.5	7.5	10/32	1565	44
225/45ZR17	91W	BSW	25.0	8.9	7.0	7.5	8.5	10/32	1356	51
225/50ZR17	98W XL	BSW	25.9	8.9	6.0	7.0	8.0	10/32	1653	50
225/55ZR17	101W XL	BSW	26.9	8.9	6.0	7.0	8.0	10/32	1819	50
225/60R17	99V	BSW	27.6	8.9	6.0	6.5	8.0	10/32	1709	44
235/45ZR17	97W XL	BSW	25.4	9.3	7.5	8.0	9.0	10/32	1609	50
235/50R17	96V	BSW	26.3	9.3	6.5	7.5	8.5	10/32	1565	44
235/55ZR17	103W XL	BSW	27.2	9.3	6.5	7.5	8.5	10/32	1929	50
245/45ZR17	99W XL	BSW	25.7	9.7	7.5	8.0	9.0	10/32	1709	50
215/55R18	99V XL	BSW	27.3	8.5	6.0	7.0	7.5	10/32	1709	50
225/40ZR18	92W XL	BSW	25.0	8.9	7.5	8.0	9.0	10/32	1389	50
225/45ZR18	95W XL	BSW	25.9	8.9	7.0	7.5	8.5	10/32	1521	50
225/55R18	98V	BSW	27.8	8.9	6.0	7.0	8.0	10/32	1653	44
235/40ZR18	95W XL	BSW	25.4	9.2	8.0	8.5	9.5	10/32	1521	50
235/45ZR18	98W XL	BSW	26.3	9.3	7.5	8.0	9.0	10/32	1653	50
235/50ZR18	101W XL	BSW	27.3	9.3	6.5	7.5	8.5	10/32	1819	50
245/40ZR18	97W XL	BSW	25.7	9.6	8.0	8.5	9.5	10/32	1609	50
245/45ZR18	100W XL	BSW	26.6	9.6	7.5	8.0	9.0	10/32	1764	50
245/50ZR18	104W XL	BSW	27.6	9.6	7.0	7.5	8.5	10/32	1984	50
255/35ZR18	94W XL	BSW	25.0	10.0	8.5	9.0	10.0	10/32	1477	50
255/45ZR18	99W	BSW	27.0	10.0	8.0	8.5	9.5	10/32	1709	51

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

WALTZ // MS1



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195/65R15	91H	BSW	25.0	7.7	5.5	6.0	7.0	9/32	1356	44
195/55R16	91H XL	BSW	24.4	7.7	5.5	6.0	7.0	9/32	1356	50
195/60R16	93H XL	BSW	25.2	7.7	5.5	6.0	7.0	9/32	1433	50
205/55R16	91V	BSW	24.9	8.4	5.5	6.5	7.5	9/32	1356	44
205/60R16	92H	BSW	25.7	8.1	5.5	6.0	7.5	9/32	1389	44
205/65R16	95V	BSW	26.5	8.1	5.5	6.0	7.5	9/32	1521	44
215/60R16	99V XL	BSW	26.1	8.5	6.0	6.5	7.5	9/32	1709	50
205/50R17	89V	BSW	25.1	8.1	5.5	6.5	7.5	9/32	1279	44
205/50R17	93V XL	BSW	25.1	8.1	5.5	6.5	7.5	9/32	1433	50
215/55R17	98V XL	BSW	26.3	8.9	6.0	7.0	7.5	9/32	1653	50
225/50R17	94V	BSW	25.9	8.9	6.0	7.0	8.0	9/32	1477	44
235/50ZR17	96W	BSW	26.3	9.3	6.5	7.5	8.5	9/32	1565	44
215/45ZR18	93W XL	BSW	25.6	8.5	7.0	7.0	8.0	9/32	1433	50
235/45ZR18	94W	BSW	26.4	9.3	7.5	8.0	9.0	9/32	1477	44

ESCAPADE // MA-T1



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
165/65R13	77T	BSW	21.5	6.6	4.5	5.0	6.0	11/32	908	44
165/70R13	79T	BSW	22.2	6.6	4.0	5.0	5.5	11/32	963	44
P175/70R13	82T	BSW	22.7	6.9	4.5	5.0	6.0	12/32	1047	44
P185/70R13	86T	BSW	23.2	7.3	4.5	5.5	6.0	12/32	1168	44
185/60R14	82H	BSW	22.8	7.5	5.0	5.5	6.5	11/32	1047	44
P195/60R14	86T	BSW	23.2	7.7	5.5	6.0	7.0	12/32	1168	44
P185/65R14	86T	BSW	23.5	7.3	5.0	5.5	6.5	12/32	1168	44
P185/70R14	88T	BSW	24.3	7.3	4.5	5.5	6.0	12/32	1235	44
P195/70R14	91T	BSW	24.8	7.7	5.0	6.0	6.5	12/32	1356	44
P205/70R14	95T	BSW	25.4	8.1	5.0	6.0	7.0	12/32	1521	44
P195/60R15	88T	BSW	24.2	7.7	5.5	6.0	7.0	12/32	1235	44
P205/60R15	91T	BSW	24.7	8.1	5.5	6.0	7.5	12/32	1356	44
P215/60R15	94T	BSW	25.2	8.5	6.0	6.5	7.5	12/32	1477	44
P195/65R15	91T	BSW	25.0	7.7	5.5	6.0	7.0	12/32	1356	44
P205/65R15	94T	BSW	25.5	8.1	5.5	6.0	7.5	12/32	1477	44
P205/70R15	96T	RWW	26.3	8.1	5.0	6.0	7.0	12/32	1565	44
P205/70R15	96T	BSW	26.3	8.1	5.0	6.0	7.0	12/32	1565	44
P215/70R15	98T	BSW	26.9	8.5	5.5	6.5	7.0	12/32	1653	44
P215/70R15	98T	RWW	26.9	8.5	5.5	6.5	7.0	12/32	1653	44
P205/55R16	91V	BSW	24.9	8.1	5.5	6.5	7.5	12/32	1356	44
215/55R16	97H XL	BSW	25.2	8.5	6.0	7.0	7.5	12/32	1609	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ESCAPADE // MA-T1 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
225/55R16	99V XL	BSW	25.7	8.9	6.0	7.0	8.0	12/32	1709	50
205/60R16	92V	BSW	25.8	8.1	5.5	6.0	7.5	12/32	1389	44
P215/60R16	95H	BSW	26.1	8.5	6.0	6.5	7.5	12/32	1521	44
P215/60R16	95T	BSW	26.1	8.5	6.0	6.5	7.5	12/32	1521	44
P225/60R16	98T	BSW	26.8	8.9	6.0	6.5	8.0	12/32	1653	44
215/55R17	94V	BSW	26.3	8.5	6.0	7.0	7.5	12/32	1477	44
225/55R17	101H XL	BSW	26.9	8.9	6.0	7.0	8.0	12/32	1819	50
P215/60R17	96T	BSW	27.2	8.8	6.0	6.5	7.5	12/32	1565	44
P225/60R17	99T	BSW	27.6	8.9	6.0	6.5	8.0	12/32	1709	44
P215/65R17	99T	BSW	28.0	8.5	6.0	6.5	7.5	12/32	1709	44
225/55R18	98H	BSW	27.8	8.9	6.0	7.0	8.0	12/32	1653	44
P225/60R18	100V	BSW	28.6	8.9	6.0	6.5	8.0	12/32	1764	44

MECOTRA // ME-3



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
145/60R13	66T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
145/70R13	71T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
145/80R13	75T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
155/65R13	73T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
155/70R13	75T	BSW	21.6	6.1	4.0	4.5	5.0	9/32	853	44
155/80R13	79T	BSW	22.8	6.1	4.0	4.5	5.0	9/32	963	44
165/65R13	77T	BSW	21.3	6.5	4.5	5.0	6.0	9/32	909	44
165/70R13	79T	BSW	22.2	6.7	4.0	5.0	5.5	9/32	963	44
165/80R13	83T	BSW	23.4	6.5	4.0	4.5	5.5	9/32	1074	44
175/60R13	77H	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
175/65R13	80T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
175/70R13	82T	BSW	22.7	6.8	4.5	5.0	6.0	9/32	1047	44
185/70R13	86H	BSW	23.3	7.4	4.5	5.5	6.0	9/32	1168	44
185/70R13	86H	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
205/60R13	86H	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
155/65R14	75T	BSW	21.9	6.0	4.5	4.5	5.5	9/32	853	44
155/70R14	77T	BSW	22.7	6.1	4.0	4.5	5.0	9/32	908	44
165/60R14	75H	BSW	21.9	6.6	4.5	5.0	6.0	9/32	853	44
165/60R14	75T	BSW	21.9	6.6	4.5	5.0	6.0	9/32	853	44
165/65R14	79T	BSW	22.3	6.4	4.5	5.0	6.0	9/32	963	44
165/70R14	81T	BSW	23.2	6.7	4.0	5.0	5.5	9/32	1019	44
165/70R14	85T XL	BSW	23.2	6.7	4.0	5.0	5.5	9/32	1135	50
175/60R14	79H	BSW	22.4	6.9	5.0	5.0	6.0	9/32	963	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

MECOTRA // ME-3 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175/65R14	82H	BSW	23.0	6.9	5.0	5.0	6.0	9/32	1047	44
175/65R14	86H XL	BSW	23.0	6.9	5.0	5.0	6.0	9/32	1168	50
175/65R14	82T	BSW	23.0	6.9	5.0	5.0	6.0	9/32	1047	44
175/65R14	86T XL	BSW	23.0	6.9	5.0	5.0	6.0	9/32	1168	50
175/70R14	84H	BSW	23.7	7.0	4.5	5.0	6.0	9/32	1102	44
175/70R14	84T	BSW	23.7	7.0	4.5	5.0	6.0	9/32	1102	44
175/70R14	88T XL	BSW	23.7	7.0	4.5	5.0	6.0	9/32	1235	50
175/80R14	88T	BSW	25.0	7.1	4.5	5.0	6.0	9/32	1235	44
185/55R14	80V	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
185/60R14	82H	BSW	22.9	7.3	5.0	5.5	6.5	9/32	1047	44
185/60R14	82T	BSW	22.9	7.3	5.0	5.5	6.5	9/32	1047	44
185/65R14	86H	BSW	23.4	7.3	5.0	5.5	6.5	9/32	1168	44
185/65R14	86T	BSW	23.4	7.3	5.0	5.5	6.5	9/32	1168	44
185/70R14	88H	BSW	24.3	7.4	4.5	5.5	6.0	9/32	1235	44
185/70R14	88T	BSW	24.3	7.4	4.5	5.5	6.0	9/32	1235	44
185/80R14	91T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
195/60R14	86H	BSW	23.3	7.8	5.5	6.0	7.0	9/32	1168	44
195/65R14	89H	BSW	23.9	7.7	5.5	6.0	7.0	9/32	1279	44
195/65R14	89H	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
195/70R14	91T	BSW	24.9	7.8	5.0	6.0	6.5	9/32	1356	44
135/70R15	70T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
145/65R15	72T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
155/60R15	74T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
165/60R15	77H	BSW	22.9	6.6	4.5	5.0	6.0	9/32	908	44
165/60R15	81T XL	BSW	23.0	6.6	4.5	5.0	6.0	9/32	1019	50
165/65R15	81H	BSW	23.4	6.5	4.5	5.0	6.0	9/32	1019	44
165/80R15	87T	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
175/55R15	77T	BSW	22.6	7.1	5.0	5.5	6.0	9/32	908	44
175/60R15	81H	BSW	23.4	6.8	5.0	5.0	6.0	9/32	1019	44
175/65R15	84H	BSW	24.0	6.9	5.0	5.0	6.0	9/32	1102	44
175/65R15	84T	BSW	24.0	6.9	5.0	5.0	6.0	9/32	1102	44
185/55R15	82H	BSW	23.1	7.7	5.0	6.0	6.5	9/32	1047	44
185/60R15	84H	BSW	23.9	7.4	5.0	5.5	6.5	9/32	1102	44
185/60R15	88H XL	BSW	23.9	7.4	5.0	5.5	6.5	9/32	1235	50
185/65R15	88H	BSW	24.4	7.4	5.0	5.5	6.5	9/32	1235	44
185/65R15	88T	BSW	24.4	7.4	5.0	5.5	6.5	9/32	1235	44
185/65R15	92T XL	BSW	24.4	7.4	5.0	5.5	6.5	9/32	1389	50
195/45R15	78V	BSW	21.9	7.6	6.0	6.5	7.5	9/32	937	44
195/50R15	82H	BSW	22.8	7.8	5.5	6.0	7.0	9/32	1047	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

MECOTRA // ME-3 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195/55R15	85H	BSW	23.5	8.0	5.5	6.0	7.0	9/32	1135	44
195/55R15	85V	BSW	23.5	8.0	5.5	6.0	7.0	9/32	1135	44
195/60R15	88H	BSW	24.3	8.0	5.5	6.0	7.0	9/32	1235	44
195/60R15	88V	BSW	24.3	8.0	5.5	6.0	7.0	9/32	1235	44
195/65R15	91H	BSW	24.9	8.0	5.5	6.0	7.0	9/32	1356	44
195/65R15	95T XL	BSW	24.9	8.0	5.5	6.0	7.0	9/32	1521	50
195/65R15	91V	BSW	24.9	8.0	5.5	6.0	7.0	9/32	1356	44
205/55R15	88V	BSW	24.0	8.4	5.5	6.5	7.5	9/32	1235	44
205/60R15	91H	BSW	24.8	8.3	5.5	6.0	7.5	9/32	1356	44
205/60R15	91V	BSW	24.8	8.3	5.5	6.0	7.5	9/32	1356	44
205/65R15	94H	BSW	25.4	8.2	5.5	6.0	7.5	9/32	1477	44
205/65R15	99T XL	BSW	25.4	8.2	5.5	6.0	7.5	9/32	1709	50
205/65R15	94V	BSW	25.4	8.2	5.5	6.0	7.5	9/32	1477	44
205/70R15	96H	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
215/65R15	96H	BSW	25.9	8.7	6.0	6.5	7.5	9/32	1565	44
225/60R15	96V	BSW	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
175/60R16	82H	BSW	24.4	6.9	5.0	5.0	6.0	9/32	1047	44
185/50R16	81V	BSW	23.5	7.4	5.0	6.0	6.5	9/32	1019	44
185/60R16	86H	BSW	24.9	7.4	5.0	5.5	6.5	9/32	1168	44
195/55R16	87H	BSW	24.6	7.9	5.5	6.0	7.0	9/32	1201	44
195/55R16	91T XL	BSW	24.6	7.9	5.5	6.0	7.0	9/32	1356	50
195/55R16	87V	BSW	24.6	7.9	5.5	6.0	7.0	9/32	1201	44
195/60R16	89H	BSW	25.3	7.8	5.5	6.0	7.0	9/32	1279	44
205/55R16	91H	BSW	25.1	8.4	5.5	6.5	7.5	9/32	1356	44
205/55R16	94H XL	BSW	25.1	8.4	5.5	6.5	7.5	9/32	1477	50
205/55R16	91V	BSW	25.1	8.4	5.5	6.5	7.5	9/32	1356	44
205/60R16	92H	BSW	25.9	8.2	5.5	6.0	7.5	9/32	1389	44
205/60R16	96H XL	BSW	25.9	8.2	5.5	6.0	7.5	9/32	1565	50
205/60R16	92V	BSW	25.9	8.2	5.5	6.0	7.5	9/32	1389	44
215/55R16	97V XL	BSW	25.5	8.8	6.0	7.0	7.5	9/32	1609	50
215/60R16	95H	BSW	26.2	8.7	6.0	6.5	7.5	9/32	1521	44
215/60R16	99H XL	BSW	26.3	8.7	6.0	6.5	7.5	9/32	1709	50
215/60R16	95V	BSW	26.2	8.7	6.0	6.5	7.5	9/32	1521	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters



i-ECO

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
165/65R13	77H	BSW	21.4	6.6	4.5	5.0	6.0	9/32	908	44
165/70R13	79H	BSW	22.1	6.5	4.0	5.0	5.5	9/32	963	44
175/70R13	82H	BSW	22.6	6.9	4.5	5.0	6.0	9/32	1047	44
185/60R14	82H	BSW	22.8	7.4	5.0	5.5	6.5	9/32	1047	44
185/65R14	86H	BSW	23.5	7.4	5.0	5.5	6.5	9/32	1168	44
195/60R14	86H	BSW	23.2	7.9	5.5	6.0	7.0	9/32	1168	44
175/65R15	84H	BSW	24.1	7.0	5.0	5.0	6.0	9/32	1102	44
185/60R15	84H	BSW	23.8	7.3	5.0	5.5	6.5	9/32	1102	44
185/65R15	88H	BSW	24.5	7.4	5.0	5.5	6.5	9/32	1235	44
195/55R15	85V	BSW	23.4	7.9	5.5	6.0	7.0	9/32	1135	44
195/60R15	88H	BSW	24.3	8.1	5.5	6.0	7.0	9/32	1235	44
195/65R15	91H	BSW	25.1	8.0	5.5	6.0	7.0	9/32	1356	44
205/60R15	91H	BSW	24.8	8.2	5.5	6.0	7.5	10/32	1356	44
205/65R15	94H	BSW	25.6	8.2	5.5	6.0	7.5	10/32	1477	44
195/55R16	87V	BSW	24.4	7.9	5.5	6.0	7.0	9/32	1201	44
205/55R16	91V	BSW	24.9	8.4	5.5	6.5	7.5	10/32	1356	44
205/60R16	92H	BSW	25.8	8.3	5.5	6.0	7.5	10/32	1389	44
215/60R16	95H	BSW	26.1	8.7	6.0	6.5	7.5	10/32	1521	44
225/60R16	98H	BSW	26.7	9.1	6.0	6.5	8.0	10/32	1653	44
235/60R16	100V	BSW	27.1	9.5	6.5	7.0	8.5	10/32	1764	44
215/50R17	91V	BSW	25.6	8.7	6.0	7.0	7.5	10/32	1356	44
215/55R17	94V	BSW	26.2	8.9	6.0	7.0	7.5	10/32	1477	44



MA-P3

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
165/70 R12	77S	BSW	21.1	6.7	4.0	5.0	5.5	10/32	908	44
155/65 R13	73T	BSW	20.9	6.1	4.5	4.5	5.5	9/32	805	44
155/70 R13	75T	BSW	21.6	6.1	4.0	4.5	5.0	9/32	853	44
155/80 R13	79T	BSW	22.8	6.3	4.0	4.5	5.0	9/32	963	44
165/65 R13	77H	BSW	21.4	6.7	4.5	5.0	6.0	10/32	908	44
165/80 R13	83S	RWW	25.1	7.9	4.0	4.5	5.5	9/32	1074	44
165/80 R13	83T	BSW	23.4	6.5	4.0	4.5	5.5	9/32	1074	44
175/60 R13	77H	BSW	28.5	8.8	5.0	5.0	6.0	9/32	908	44
175/70 R13	82H	BSW	22.7	6.9	4.5	5.0	6.0	10/32	1047	44
175/70 R13	82T	RWW	28.5	8.8	4.5	5.0	6.0	10/32	1047	44
185/60 R13	80V	BSW	21.8	7.3	5.0	5.5	6.5	10/32	992	44
185/70 R13	86H	BSW	23.2	7.5	4.5	5.5	6.0	10/32	1168	44
205/60 R13	86H	BSW	22.7	8.4	5.5	6.0	7.5	10/32	1168	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

MA-P3 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
215/50 R13	84H	BSW	21.5	8.8	6.0	7.0	7.5	9/32	1102	44
205/60 R14	88H	BSW	23.8	8.3	5.5	6.0	7.5	10/32	1235	44
175/65 R14	82H	BSW	23.0	6.9	5.0	5.0	6.0	9/32	1047	44
175/70 R14	84H	BSW	23.7	7.0	4.5	5.0	6.0	10/32	1102	44
175/80 R14	88H	BSW	25.0	7.1	4.5	5.0	6.0	9/32	1235	44
185/60 R14	82H	BSW	22.8	7.3	5.0	5.5	6.5	10/32	1047	44
185/65 R14	86H	BSW	23.5	7.5	5.0	5.5	6.5	10/32	1168	44
185/70 R14	88H	BSW	24.3	7.5	4.5	5.5	6.0	10/32	1235	44
185/70 R14	88H	RWW	24.3	7.5	4.5	5.5	6.0	10/32	1235	44
185/80 R14	91T	BSW	25.7	7.5	4.5	5.0	6.0	10/32	1356	44
195/70 R14	91H	BSW	24.8	7.9	5.0	6.0	6.5	10/32	1356	44
205/70 R14	95H	BSW	25.4	8.1	5.0	6.0	7.0	10/32	1521	44
205/75 R14	95S	RWW	26.3	8.1	5.0	5.5	7.0	11/32	1521	44
165/80 R15	87T	BSW	25.4	6.5	4.0	4.5	5.5	9/32	1202	44
185/60 R15	88H XL	BSW	23.8	7.4	5.0	5.5	6.5	10/32	1235	50
185/65 R15	88H	BSW	24.5	7.4	5.0	5.5	6.5	9/32	1235	44
185/65 R15	92H XL	BSW	24.5	7.4	5.0	5.5	6.5	9/32	1389	44
195/55 R15	85V	BSW	23.5	7.8	5.5	6.0	7.0	10/32	1135	44
195/60 R15	88H	BSW	24.3	7.9	5.5	6.0	7.0	10/32	1235	44
195/65 R15	91H	BSW	25.0	7.9	5.5	6.0	7.0	10/32	1356	44
195/65 R15	95H XL	BSW	25.0	7.9	5.5	6.0	7.0	10/32	1521	44
205/60 R15	91H	BSW	24.8	8.1	5.5	6.0	7.5	10/32	1356	44
205/65 R15	95H	BSW	25.5	8.2	5.5	6.0	7.5	10/32	1521	44
205/70 R15	96H	BSW	26.4	8.3	5.0	6.0	7.0	11/32	1565	44
205/70 R15	96S	RWW	26.4	8.2	5.0	6.0	7.0	11/32	1565	44
205/75 R15	97S	RWW	27.4	8.0	5.0	5.5	7.0	11/32	1609	44
215/65 R15	96H	BSW	26.1	8.7	6.0	6.5	7.5	0/32	1565	44
215/70 R15	98H	BSW	26.9	8.8	5.5	6.5	7.0	10/32	1653	44
215/70 R15	98S	RWW	26.9	8.7	5.5	6.5	7.0	10/32	1653	44
215/75 R15	100S	RWW	27.8	8.6	5.5	6.0	7.0	11/32	1764	44
225/70 R15	100S	RWW	27.4	9.1	6.0	6.5	7.5	12/32	1764	44
225/75 R15	102S	RWW	28.4	8.9	6.0	6.0	7.5	11/32	1874	44
235/75 R15	105S	RWW	29.1	9.3	6.0	6.5	8.0	11/32	2039	44
205/55 R16	91V	BSW	25.0	8.3	5.5	6.5	7.5	10/32	1356	44
205/65 R16	95H	BSW	26.5	8.2	5.5	6.0	7.5	10/32	1521	44
215/60 R16	99H XL	BSW	26.3	8.7	6.0	6.5	7.5	10/32	1709	50
225/55 R16	95V	BSW	25.8	9.1	6.0	7.0	8.0	10/32	1521	44
225/60 R16	98H	BSW	26.7	9.0	6.0	6.5	8.0	10/32	1653	44
235/60 R16	100H	BSW	27.1	9.4	6.5	7.0	8.5	10/32	1764	44
235/55 R17	103V XL	BSW	27.2	9.6	6.5	7.5	8.5	10/32	1929	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

PRAGMATRA // MP-10



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175/65R14	82H	BSW	23.0	6.9	5.0	5.0	6.0	10/32	1047	44
175/70R13	82H	BSW	22.7	6.9	4.5	5.0	6.0	10/32	1047	44
175/70R14	84H	BSW	23.7	6.9	4.5	5.0	6.0	10/32	1102	44
185/55R15	82H	BSW	23.0	7.3	5.0	6.0	6.5	10/32	1047	44
185/60R14	82H	BSW	22.8	7.3	5.0	5.5	6.5	10/32	1047	44
185/60R15	84H	BSW	23.7	7.3	5.0	5.5	6.5	10/32	1102	44
185/65R14	86H	BSW	23.5	7.3	5.0	5.5	6.5	10/32	1168	44
185/65R15	88H	BSW	24.4	7.3	5.0	5.5	6.5	10/32	1235	44
185/70R14	88H	BSW	24.3	7.3	4.5	5.5	6.0	10/32	1235	44
195/55R15	85H	BSW	23.4	7.7	5.5	6.0	7.0	10/32	1135	44
195/60R15	88H	BSW	24.2	7.7	5.5	6.0	7.0	10/32	1235	44
195/65R15	91H	BSW	25.0	7.7	5.5	6.0	7.0	10/32	1356	44
205/55R16	91V	BSW	24.9	8.1	5.5	6.5	7.5	10/32	1356	44
215/55R16	93V	BSW	25.3	8.5	6.0	7.0	7.5	10/32	1433	44

S-PRO



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
225/60R17	99H	BSW	27.6	9.0	6.0	6.5	8.0	11/32	1709	44
235/55R17	103V XL	BSW	27.2	9.7	6.5	7.5	8.5	11/32	1929	50
235/65R17	104V	BSW	29.2	9.4	6.5	7.0	8.5	11/32	1984	44
225/60R18	100V	BSW	28.6	8.9	6.0	6.5	8.0	11/32	1764	44
235/50R18	101W XL	BSW	27.4	9.6	6.5	7.5	8.5	11/32	1819	50
235/55R18	100W	BSW	28.2	9.7	6.5	7.5	8.5	11/32	1764	51
235/60R18	107V XL	BSW	29.2	9.4	6.5	7.0	8.5	11/32	2149	50
255/55R18	109W XL	BSW	29.2	10.3	7.0	8.0	9.0	11/32	2271	50
265/60R18	114V XL	BSW	30.5	10.7	7.5	8.0	9.5	11/32	2601	50
225/55R19	99W	BSW	28.9	9.2	6.0	7.0	8.0	11/32	1709	51
235/45R19	99W XL	BSW	27.4	9.4	7.5	8.0	9.0	11/32	1709	50
235/50R19	99W	BSW	28.5	9.7	6.5	7.5	8.5	11/32	1709	51
235/55R19	101V	BSW	29.3	9.6	6.5	7.5	8.5	11/32	1819	44
255/45R19	104W XL	BSW	28.2	10.2	8.0	8.5	9.5	11/32	1984	50
255/50R19	107W XL	BSW	29.3	10.4	7.0	8.0	9.0	11/32	2149	50
245/50R20	102W	BSW	29.9	10.0	7.0	7.5	8.5	11/32	1874	51
265/50R20	112W XL	BSW	30.8	10.8	7.5	8.5	9.5	11/32	2469	50
265/50R20	112V XL	BSW	30.5	11.5	7.5	8.5	9.5	11/32	2469	50
275/40R20	106W XL	BSW	28.9	10.8	9.0	9.5	11.0	10/32	2094	50
275/45R20	110W XL	BSW	29.8	10.8	8.5	9.0	10.5	11/32	2337	50
275/55R20	117W XL	BSW	31.9	11.3	7.5	8.5	9.5	11/32	2833	50
275/55ZR20	117W XL	BSW	31.9	11.1	7.5	8.5	9.5	11/32	2833	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

MARAUDER // MA-S2



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/70R15	96H	BSW	26.4	8.2	5.0	6.0	7.0	1565	11/32	36
225/70 R15	100H	BSW	27.4	8.9	6.0	6.5	7.5	1764	12/32	36
225/75 R15	102H	BSW	28.3	9.0	6.0	6.0	7.5	1874	11/32	36
235/70 R15	103H	BSW	28.0	9.4	6.0	7.0	8.0	1929	12/32	36
215/65R16	102H XL	BSW	27.0	8.7	6.0	6.5	7.5	1874	10/32	50
215/70R16	100H	BSW	27.9	8.7	5.5	6.5	7.0	1764	11/32	36
225/70R16	107H XL	BSW	28.4	9.0	6.0	6.5	7.5	2149	12/32	42
235/60R16	104H XL	BSW	27.2	9.4	6.5	7.0	8.5	1984	10/32	50
245/70R16	111H XL	BSW	29.5	9.8	6.5	7.0	8.0	2403	12/32	42
255/65 R16	109H	BSW	29.2	10.2	7.0	7.5	9.0	2270	10/32	44
265/70R16	112H	BSW	30.7	10.6	7.0	8.0	9.0	2469	12/32	36
235/65R17	104V	BSW	29.1	9.2	6.5	7.0	8.5	1984	10/32	44
255/60R17	110H XL	BSW	29.1	10.1	7.0	7.5	9.0	2337	11/32	50
255/65R17	110H	BSW	30.1	10.1	7.0	7.5	9.0	2337	10/32	44
265/65R17	112H	BSW	30.6	10.6	7.5	8.0	9.5	2469	10/32	44
275/55R17	109V	BSW	29.0	10.9	7.5	8.5	9.5	2271	11/32	44
235/55 R18	104V XL	BSW	28.3	9.5	6.5	7.5	8.5	1984	11/32	50
235/60R18	107V XL	BSW	29.2	9.3	6.5	7.0	8.5	2149	10/32	50
255/55R18	109V XL	BSW	29.1	10.2	7.0	8.0	9.0	2271	11/32	50
265/60 R18	110H	BSW	30.6	10.7	7.5	8.0	9.5	2337	11/32	44
255/50R19	107V XL	BSW	29.1	10.3	7.0	8.0	9.0	2150	11/32	50
285/45R19	111V XL	BSW	28.9	11.3	9.0	9.5	10.5	2403	11/32	50
245/40R20	99W XL	BSW	27.6	9.7	8.0	8.5	9.5	1709	11/32	50
245/45R20	99W	BSW	28.5	9.6	7.5	8.0	9.0	1709	11/32	44
255/45R20	105V XL	BSW	29.1	10.0	8.0	8.5	9.5	2039	11/32	50
265/50 R20	112V XL	BSW	30.5	10.7	7.5	8.5	9.5	2469	12/32	50
275/40R20	106V XL	BSW	28.7	10.9	9.0	9.5	11.0	2094	11/32	50
275/45R20	111V XL	BSW	29.7	10.6	8.5	9.0	10.5	2403	11/32	50
275/55R20	117V XL	BSW	32.0	10.9	7.5	8.5	9.5	2833	11/32	50
285/50R20	112V	BSW	31.3	11.5	8.0	9.0	10.0	2469	12/32	44
295/40R20	110V XL	BSW	29.1	11.8	10.0	10.5	11.5	2337	12/32	50
295/45R20	114V XL	BSW	30.4	11.7	9.5	10.0	11.0	2601	11/32	50
305/50R20	116V	BSW	32.0	12.4	8.5	9.5	11.0	2756	12/32	44
265/40R22	106V XL	BSW	30.4	10.8	9.0	9.5	10.5	2094	11/32	50
305/40R22	114V XL	BSW	31.6	12.2	10.0	11.0	12.0	2601	10/32	50
305/45R22	118V XL	BSW	32.8	11.9	9.5	10.0	11.5	2910	12/32	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ESCAPADE CUV



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
215/65R16	98V	BSW	27.2	8.5	6.0	6.5	7.5	10/32	1653	44
225/60R17	99V	BSW	27.8	8.7	6.0	6.5	8.0	10/32	1709	44
225/65R17	102V	BSW	28.5	8.6	6.0	6.5	8.0	10/32	1874	44
235/55R17	103V XL	BSW	27.3	9.5	6.5	7.5	8.5	11/32	1929	50
235/60R17	102V	BSW	28.1	9.4	6.5	7.0	8.5	10/32	1874	44
235/65R17	104V	BSW	29.1	9.4	6.5	7.0	8.5	10/32	1984	44
245/65R17	107V	BSW	29.6	9.7	7.0	7.0	8.5	10/32	2149	44
255/60R17	106V	BSW	29.2	9.8	7.0	7.5	9.0	11/32	2094	44
275/55R17	109V	BSW	29.0	10.9	7.5	8.5	9.5	11/32	2271	44
235/50R18	101V XL	BSW	27.4	9.6	6.5	7.5	8.5	10/32	1819	50
235/55R18	100V	BSW	28.3	9.3	6.5	7.5	8.5	11/32	1764	44
235/60R18	103V	BSW	29.1	9.2	6.5	7.0	8.5	11/32	1929	44
235/65R18	106V	BSW	30.2	9.4	6.5	7.0	8.5	10/32	2094	44
245/60R18	105V	BSW	29.6	9.6	7.0	7.0	8.5	11/32	2039	44
255/55R18	109V XL	BSW	29.1	10.2	7.0	8.0	9.0	11/32	2271	50
255/65R18	111V	BSW	31.1	10.2	7.0	7.5	9.0	10/32	2403	44
265/60R18	114V XL	BSW	30.6	10.5	7.5	8.0	9.5	10/32	2601	50
235/55R19	105V XL	BSW	29.3	9.5	6.5	7.5	8.5	10/32	2039	50
245/55R19	103V	BSW	29.4	9.8	7.0	7.5	8.5	10/32	1929	44
255/50R19	107V XL	BSW	29.1	10.5	7.0	8.0	9.0	10/32	2149	50
255/55R19	111V XL	BSW	30.2	10.2	7.0	8.0	9.0	11/32	2403	44
255/60R19	109V	BSW	31.1	10.2	7.0	7.5	9.0	10/32	2271	44
245/50R20	102V	BSW	29.7	10.0	7.0	7.5	8.5	11/32	1874	44

BRAVO // HP-M3



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/70R15	96H	BSW	26.4	8.3	5.0	6.0	7.0	10/32	1565	44
215/70R15	98H	BSW	27.0	8.8	5.5	6.5	7.0	10/32	1653	44
225/60R15	96H	BSW	25.6	9.1	6.0	6.5	8.0	10/32	1565	44
255/70R15	108H	BSW	29.1	10.3	6.5	7.5	8.5	11/32	2205	44
265/70R15	112H	BSW	29.6	10.9	7.0	8.0	9.0	10/32	2469	44
205/70R16	97H	BSW	27.4	8.1	5.0	6.0	7.0	10/32	1609	44
215/65R16	98V	BSW	26.9	8.5	6.0	6.5	7.5	11/32	1653	44
215/70R16	100H	BSW	28.0	8.5	5.5	6.5	7.0	11/32	1764	44
225/70R16	107H XL	BSW	28.5	9.0	6.0	6.5	7.5	10/32	2149	50
235/70R16	109H XL	BSW	29.0	9.5	6.0	7.0	8.0	10/32	2271	50
245/70R16	107H	BSW	29.6	9.8	6.5	7.0	8.0	10/32	2149	44
265/70R16	112H	BSW	30.6	10.4	7.0	8.0	9.0	11/32	2469	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BRAVO // HP-M3 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/50R17	93V XL	BSW	25.3	8.3	5.5	6.5	7.5	10/32	1433	50
215/45R17	91V XL	BSW	24.6	8.4	7.0	7.0	8.0	10/32	1356	50
215/50R17	95V XL	BSW	25.5	8.9	6.0	7.0	7.5	11/32	1521	50
215/60R17	96H	BSW	27.2	8.5	6.0	6.5	7.5	11/32	1565	44
215/70R17	101H	BSW	28.9	8.7	5.5	6.5	7.0	10/32	1819	44
225/45R17	91V	BSW	24.9	8.8	7.0	7.5	8.5	10/32	1356	44
225/60R17	99H	BSW	27.6	8.9	6.0	6.5	8.0	11/32	1709	44
225/65R17	102V	BSW	28.5	8.9	6.0	6.5	8.0	11/32	1874	44
235/45ZR17	94W	BSW	25.3	9.3	7.5	8.0	9.0	10/32	1477	51
235/50R17	100V XL	BSW	26.3	9.3	6.5	7.5	8.5	10/32	1764	50
235/55R17	99V	BSW	27.2	9.3	6.5	7.5	8.5	11/32	1709	44
235/60R17	106V XL	BSW	28.2	9.5	6.5	7.0	8.5	10/32	2094	50
235/65R17	104H	BSW	29.0	9.3	6.5	7.0	8.5	11/32	1984	44
245/65R17	107H	BSW	29.5	9.6	7.0	7.0	8.5	11/32	2149	44
245/70R17	114H XL	BSW	30.5	9.8	6.5	7.0	8.0	10/32	2601	50
255/60R17	106V	BSW	29.0	10.0	7.0	7.5	9.0	11/32	2094	44
265/65R17	112H	BSW	30.7	10.4	7.5	8.0	9.5	11/32	2469	44
275/55R17	109V	BSW	28.9	10.8	7.5	8.5	9.5	11/32	2271	44
215/55R18	95H	BSW	27.3	8.5	6.0	7.0	7.5	11/32	1521	44
225/55R18	98V	BSW	27.8	8.9	6.0	7.0	8.0	11/32	1653	44
225/55R18	98V	BSW	27.8	8.9	6.0	7.0	8.0	10/32	1653	44
225/60R18	100V	BSW	28.6	8.9	6.0	6.5	8.0	11/32	1764	44
235/50R18	97V	BSW	27.3	9.3	6.5	7.5	8.5	10/32	1609	44
235/60R18	103V	BSW	29.1	9.3	6.5	7.0	8.5	11/32	1929	44
235/65R18	106V	BSW	30.2	9.3	6.5	7.0	8.5	11/32	2094	44
245/45R18	96V	BSW	26.7	9.6	7.5	8.0	9.0	10/32	1565	44
245/60R18	105V	BSW	29.6	9.6	7.0	7.0	8.5	11/32	2039	44
255/55R18	109V XL	BSW	29.0	10.0	7.0	8.0	9.0	11/32	2271	50
255/60R18	112V XL	BSW	30.1	10.0	7.0	7.5	9.0	11/32	2469	50
255/65R18	115V XL	BSW	31.0	10.4	7.0	7.5	9.0	10/32	2679	50
255/70R18	113H	BSW	32.1	10.2	6.5	7.5	8.5	10/32	2535	44
265/60R18	114V XL	BSW	30.5	10.8	7.5	8.0	9.5	10/32	2601	50
265/65R18	114H	BSW	31.7	11.0	7.5	8.0	9.5	10/32	2601	44
265/70R18	116H	BSW	32.6	10.7	7.0	8.0	9.0	10/32	2756	44
225/55R19	99V	BSW	28.8	9.2	6.0	7.0	8.0	10/32	1709	44
235/50R19	99V	BSW	28.3	9.6	6.5	7.5	8.5	10/32	1709	44
235/55R19	105V XL	BSW	29.2	9.3	6.5	7.5	8.5	11/32	2039	50
245/55R19	103V	BSW	29.6	9.6	7.0	7.5	8.5	11/32	1929	44
255/50R19	103V	BSW	29.3	10.0	7.0	8.0	9.0	10/32	1929	44
255/55R19	111V XL	BSW	30.0	10.0	7.0	8.0	9.0	11/32	2403	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters



BRAVO // HP-M3 continued

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
255/60R19	109H	BSW	31.1	10.0	7.0	7.5	9.0	11/32	2271	44
265/50R19	110V XL	BSW	29.5	10.4	7.5	8.5	9.5	10/32	2337	50
285/45R19	107V	BSW	29.0	11.2	9.0	9.5	10.5	10/32	2150	44
235/55R20	102V	BSW	30.2	9.3	6.5	7.5	8.5	11/32	1874	44
245/50R20	102V	BSW	29.8	9.7	7.0	7.5	8.5	10/32	1874	44
255/45R20	105V XL	BSW	29.1	10.0	8.0	8.5	9.5	10/32	2039	50
255/50R20	109V XL	BSW	30.1	10.0	7.0	8.0	9.0	10/32	2271	50
255/55R20	110V XL	BSW	31.1	10.4	7.0	8.0	9.0	10/32	2337	50
265/50R20	107V	BSW	30.5	10.4	7.5	8.5	9.5	10/32	2149	44
275/45R20	110V XL	BSW	29.8	10.8	8.5	9.0	10.5	10/32	2337	50
285/50R20	116V XL	BSW	31.3	11.7	8.0	9.0	10.0	10/32	2756	50



PRAGMATRA // MP-15

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/65R15	94V	BSW	25.5	8.1	5.5	6.0	7.5	10/39	1477	44
205/70R15	96H	BSW	26.3	8.1	5.0	6.0	7.0	10/32	1565	44
215/70R15	98V	BSW	26.9	8.5	5.5	6.5	7.0	10/40	1653	44
205/65R16	95V	BSW	26.5	8.1	5.5	6.0	7.5	10/45	1521	44
205/70R16	97H	BSW	27.3	8.1	5.0	6.0	7.0	10/47	1609	44
215/65R16	98H	BSW	27.0	8.5	6.0	6.5	7.5	10/43	1653	44
215/70R16	100H	BSW	27.9	8.5	5.5	6.5	7.0	10/33	1764	44
235/70R16	106H	BSW	29.0	9.3	6.0	7.0	8.0	10/34	2094	44
215/60R17	96V	BSW	27.2	8.5	6.0	6.5	7.0	10/36	1565	44
225/60R17	99V	BSW	27.6	8.9	6.0	6.5	7.0	10/41	1709	44
225/65R17	102V	BSW	28.5	8.9	6.0	6.5	8.0	10/37	1874	44
235/55R17	99V	BSW	27.2	9.3	6.5	7.5	8.5	10/35	1709	44
235/65R17	104H	BSW	29.1	9.3	6.5	7.0	8.5	10/38	1984	44
215/55R18	95V	BSW	27.3	8.5	6.0	7.0	7.5	10/46	1521	44
225/55R18	98V	BSW	27.8	8.9	6.0	7.0	8.0	10/42	1653	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BRAVO // HT-770 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
30X9.50R15LT	104S	BSW	29.3	9.1	6.5	7.5	8.5	16/32	1985	50
31X10.50R15LT	109S	BSW	30.3	10.8	7.0	8.5	9.0	16/32	2271	50
LT225/75 R16	115/112S 10PR	OWL	29.3	8.9	6.0	6.0	7.0	14/32	S2680/D2470	80
LT265/75 R16*	123/120S 10PR	OWL	31.6	10.4	7.0	7.5	8.0	16/32	S3415/D3085	80
LT235/85 R16*	120/116S 10PR	OWL	31.8	9.3	6.0	6.5	7.5	16/32	S3085/D2755	80
LT245/70 R17*	119/116S 10PR	OWL	30.6	9.6	6.5	7.0	8.0	16/32	S3000/D2755	80
LT265/70 R17*	121/118S 10PR	OWL	31.6	10.4	7.0	8.0	8.5	16/32	S3195/D2910	80
LT235/80 R17*	120/117S 10PR	OWL	31.8	9.3	6.0	6.5	7.5	16/32	S3085/D2835	80
LT275/70 R18	121/S PR	OWL	31.8	9.2	7.0	8.0	8.5	14/32	3195	44
LT275/70 R18*	125/122S 10PR	OWL	33.2	10.8	7.0	8.0	8.5	16/32	S3640/D3305	80
235/60 R14	96H	OWL	25.2	9.3	6.5	7.0	8.5	13/32	1565	44
225/70R15	100T	BSW	27.6	9.0	6.0	6.5	7.5	13/32	1765	44
235/70 R15	107S XL	OWL	28.0	9.3	6.0	7.0	8.0	13/32	2149	50
235/75 R15	109S XL	OWL	28.9	9.3	6.0	6.5	8.0	13/32	2271	50
255/60 R15	102T	OWL	27.1	10.0	7.0	7.5	9.0	13/32	1874	44
265/50 R15	99H	BSW	25.5	10.4	7.5	8.5	9.5	13/32	1720	44
215/70 R16	100T	OWL	28.0	8.5	5.5	6.5	7.0	13/32	1764	44
225/70 R16	107T XL	OWL	28.5	8.9	6.0	6.5	7.5	13/32	2149	50
235/65 R16	107T XL	OWL	28.0	9.3	6.5	7.0	8.5	13/32	2149	50
235/70 R16	106T	OWL	29.0	9.3	6.0	7.0	8.0	13/32	2094	44
235/75 R16	112S XL	OWL	29.9	9.3	6.0	6.5	8.0	13/32	2469	50
245/70R16	111T XL	BSW	29.4	9.7	6.5	7.0	8.0	13/32	2405	50
245/70 R16	111S XL	OWL	29.4	9.6	6.5	7.0	8.0	13/32	2403	50
245/75 R16	111S	OWL	30.5	9.6	6.5	7.0	8.0	13/32	2403	44
255/70 R16	111S	OWL	30.1	10.0	6.5	7.5	8.5	13/32	2403	44
265/70R16	112T	BSW	30.7	10.6	7.0	8.0	9.0	13/32	2469	44
265/70 R16	112S	OWL	30.7	10.4	7.0	8.0	9.0	14/32	2469	44
265/75 R16	116T	OWL	31.6	10.4	7.0	7.5	9.0	14/32	2756	44
275/60 R16	109T	OWL	29.1	10.8	7.5	8.0	9.5	13/32	2271	44
225/65 R17	102H	OWL	28.6	8.9	6.0	6.5	8.0	13/32	1874	44
235/60 R17	102H	OWL	28.2	9.3	6.5	7.0	8.5	13/32	1874	44
235/65 R17	104H	OWL	29.1	9.3	6.5	7.0	8.5	13/32	1984	44
235/70 R17	111S XL	OWL	30.0	9.3	6.0	7.0	8.0	13/32	2403	50
235/75 R17	109S	OWL	31.0	9.3	6.0	6.5	8.0	13/32	2271	44
245/65R17	111H XL	BSW	29.6	9.6	7.0	7.0	8.5	13/32	2403	50
245/65 R17	111H XL	OWL	29.4	9.6	7.0	7.0	8.5	13/32	2403	50
245/70 R17	110S	OWL	30.6	9.6	6.5	7.0	8.0	13/32	2337	44
255/60 R17	110T XL	OWL	29.1	10.0	7.0	7.5	9.0	13/32	2337	50
255/65 R17	110S	OWL	30.2	10.0	7.0	7.5	9.0	13/32	2337	44
255/70 R17	112S	OWL	31.1	10.0	6.5	7.5	8.5	13/32	2469	44

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters



BRAVO // HT-770

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
265/65 R17	112S	OWL	30.5	10.4	7.5	8.0	9.5	13/32	2469	44
265/70 R17	115T	OWL	31.5	10.6	7.0	8.0	9.0	14/32	2679	44
275/60 R17	110S	OWL	30.0	10.8	7.5	8.0	9.5	13/32	2337	44
255/60R18	108H	BSW	30.1	10.2	7.0	7.5	9.0	11/32	2205	44
265/60 R18	114H XL	OWL	30.6	10.4	7.5	8.0	9.5	13/32	2601	50
275/65 R18	116T	OWL	32.2	10.8	7.5	8.0	9.5	13/32	2756	44
275/55 R20	117H XL	OWL	32.0	10.8	7.5	8.5	9.5	13/32	2833	50
275/60 R20	115T	OWL	32.9	10.8	7.5	8.0	9.5	13/32	2679	44



BRAVO // AT-771

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
27X805R14LT	95S 6PR	OWL	26.6	8.5	6.0	7.0	7.5	15/32	1520	50
30X9.50R15LT	104S 6PR	OWL	29.6	9.5	6.5	7.5	8.5	16/32	1985	50
31X10.5R15LT	109S 6PR	OWL	30.4	10.5	7.0	8.5	9.0	16/32	2270	50
33X12.5R15LT	108S 6PR	OWL	32.6	12.5	8.5	10.0	11.0	17/32	2205	35
35X12.5R15LT*	113Q 6PR	OWL	34.6	12.5	8.5	10.0	11.0	17/32	2535	35
LT235/75R15	104/101S 6PR	OWL	28.9	9.3	6.0	6.5	7.0	14/32	S1985/D1820	50
LT215/85R16*	115/112R 10PR	OWL	30.4	8.5	5.5	6.0	7.0	15/32	S2680/D2470	80
LT225/70R16	102/99S 6PR	OWL	28.4	8.9	6.0	6.5	7.0	16/32	S1875/D1710	50
LT225/75R16	115/112Q 10PR	OWL	29.3	8.9	6.0	6.0	7.0	14/32	S2680/D2470	80
LT235/70R16	104/101S 6PR	OWL	29.0	9.3	6.0	7.0	7.5	16/32	S1985/D1820	50
LT235/85R16*	120/116S 10PR	OWL	31.8	9.3	6.0	6.5	7.5	16/32	S3085/D2755	80
LT245/75R16	108/104S 6PR	OWL	30.5	9.6	6.5	7.0	8.0	16/32	S2205/D2006	50
LT245/75R16*	120/116Q 10PR	OWL	30.4	9.6	6.5	7.0	8.0	16/32	S3042/D2778	80
LT265/70R16	117/114S 8PR	OWL	30.6	10.4	7.0	8.0	8.5	16/32	S2835/D2600	65
LT265/75R16	119/116Q 8PR	OWL	31.7	10.4	7.0	7.5	8.0	16/32	S3000/D2755	65
LT265/75R16*	123/120Q 10PR	OWL	31.6	10.4	7.0	7.5	8.0	16/32	S3415/D3085	80
LT27570R16	119/116S 8PR	OWL	31.1	10.8	7.0	8.0	8.5	17/32	S3000/D2755	65
LT285/75R16	122/119R 8PR	OWL	32.8	11.2	7.5	8.0	9.0	17/32	S3305/D3000	65
LT285/75R16*	126/123Q 10PR	OWL	32.8	11.2	7.5	8.0	9.0	17/32	S3750/D3415	80
LT305/70R16*	124/121R 10PR	OWL	32.8	12.3	8.0	9.0	9.5	17/32	S3525/D3195	65
LT315/75R16	121/118R 8PR	OWL	34.6	12.6	8.0	8.5	11.0	17/32	S3195/D2910	50
LT225/75R17*	116/113Q 10PR	OWL	30.4	8.9	6.0	6.0	7.5	14/32	S2755/D2535	80
LT235/80R17*	120/117R 10PR	OWL	31.8	9.3	6.0	6.5	7.5	16/32	S3085/D2835	80
LT245/70R17*	119/116R 10PR	OWL	30.5	9.7	6.5	7.0	8.0	15/32	S3000/D2755	80
LT245/75R17*	121/118S 10PR	OWL	31.5	9.6	6.5	7.0	7.5	16/32	S3195/D2910	80
LT255/75R17	111/108Q 6PR	OWL	TBD	TBD	6.5	7.0	8.5	16/32	S2405/D2205	50
LT265/65R17*	120/117S 10PR	OWL	30.6	10.4	7.5	8.0	9.5	16/32	S3085/D2835	80

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BRAVO // AT-771 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
LT265/70R17*	121/118R 10PR	OWL	31.6	10.4	7.0	8.0	8.5	16/32	S3195/D2910	80
LT275/65R17*	121/118S 10PR	BSW	31.1	11.0	7.5	8.0	9.5	16/32	S3195/D2910	80
LT285/70R17	121/118R 8PR	OWL	32.7	11.2	7.5	8.5	9.0	17/32	S3195/D2910	65
LT305/70R17	119/116Q 8PR	OWL	33.8	12.0	8.0	9.0	9.5	17/32	S3000/D2755	50
LT315/70R17	121/118R 8PR	OWL	34.4	12.4	8.0	9.5	11.0	17/32	S3195/D2910	50
LT265/70R18	124/121Q 10PR	OWL	32.7	10.7	7.0	8.0	9.0	16/32	S3525/D3195	80
LT275/65R18*	123/120S 10PR	OWL	32.1	10.8	7.5	8.0	9.0	16/32	S3415/D3085	80
LT275/70R18	125/122R 10PR	OWL	TBD	TBD	7.0	8.0	8.5	17/32	S3640/D3305	80
LT285/65R18*	125/122R 10PR	OWL	32.5	11.2	8.0	8.5	10.0	17/32	S3640/D3305	80
LT325/60 R18	124/121Q 10PR	OWL	33.2	13.1	8.5	9.5	10.0	15/32	S3525/D3195	65
LT325/65R18*	121/118S 8PR	OWL	34.5	12.8	9.0	9.5	12.0	17/32	S3195/D2910	50
LT275/65R20	126/123R 10PR	BSW	34.1	11.0	7.5	8.0	9.5	16/32	S3750/D3415	80
LT285/55R20*	122/119S 10PR	OWL	32.5	11.2	8.0	9.0	10.0	16/32	S3305/D3000	80
LT305/55R20*	121/118S 10PR	BSW	33.3	12.0	8.5	9.5	11.0	16/32	S3195/D2910	65
LT325/60R20*	126/123S 10PR	OWL	35.3	12.8	9.0	9.5	12.0	16/32	S3750/D3415	65
205/70R15	96T	OWL	26.3	8.1	5.0	6.0	7.0	13/32	1565	44
205/75R15	97T	OWL	27.1	8.1	5.0	5.5	7.0	13/32	1609	44
215/75R15	100S	OWL	27.8	8.5	5.5	6.0	7.0	13/32	1764	44
225/70R15	100S	OWL	27.4	8.9	6.0	6.5	7.5	13/32	1764	44
225/75R15	102S	OWL	28.3	8.9	6.0	6.0	7.5	13/32	1874	44
235/60R15	98S	OWL	26.2	9.3	6.5	7.0	8.5	13/32	1653	44
235/75R15	109S XL	OWL	28.9	9.3	6.0	6.5	8.0	13/32	2271	50
255/70R15	108T	OWL	29.1	10.0	6.5	7.5	8.5	13/32	2205	44
265/70R15	112S	OWL	29.6	10.4	7.0	8.0	9.0	13/32	2469	44
215/65R16	98T	OWL	27.0	8.5	6.0	6.5	7.5	13/32	1653	44
215/70R16	100T	OWL	28.0	8.7	5.5	6.5	7.0	13/32	1764	44
225/75R16	108S XL	OWL	29.3	8.9	6.0	6.0	7.5	13/32	2205	50
235/60R16	104H XL	BSW	27.1	9.3	6.5	7.0	8.5	13/32	1984	50
235/70R16	106T	OWL	29.0	9.3	6.0	7.0	8.0	13/32	2094	44
P235/70R16	106T	OWL	28.9	9.4	6.0	7.0	8.0	13/32	2094	44
245/70R16	107T	OWL	29.5	9.6	6.5	7.0	8.0	13/32	2149	44
245/75R16	111S	OWL	31.1	9.6	6.5	7.0	8.0	13/32	2403	44
255/65R16	109T	OWL	29.1	10.0	7.0	7.5	9.0	13/32	2271	44
255/70R16	111T	OWL	30.0	10.0	6.5	7.5	8.5	13/32	2403	44
265/70R16	112T	OWL	30.6	10.4	7.0	8.0	9.0	13/32	2469	44
265/75R16	116T	OWL	31.1	10.5	7.0	7.5	9.0	13/32	2756	44
275/70R16	114T	OWL	31.2	10.8	7.0	8.0	9.0	14/32	2601	44
225/60R17	103T XL	BSW	29.2	9.5	6.0	6.5	8.0	13/32	1929	50
225/65R17	102T	OWL	28.5	8.9	6.0	6.5	8.0	13/32	1874	44
235/65R17	104T	OWL	29.1	9.3	6.5	7.0	8.5	13/32	1984	44
235/75R17	109T	OWL	31.0	9.3	6.0	6.5	8.0	13/32	2271	44

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BRAVO // AT-771 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
245/65R17	107S	OWL	29.5	9.6	7.0	7.0	8.5	13/32	2149	44
245/65R17	111S XL	OWL	29.5	9.8	7.0	7.0	8.5	13/32	2403	50
245/70R17	110S	OWL	30.7	9.6	6.5	7.0	8.0	13/32	2337	44
255/65R17	110H	BSW	30.1	10.0	7.0	7.5	9.0	13/32	2337	44
255/70R17	112S	BSW	31.1	10.0	6.5	7.5	8.5	13/32	2469	44
265/65R17	112T	OWL	30.6	10.4	7.5	8.0	9.5	13/32	2469	44
265/70R17	115S	OWL	31.8	10.4	7.0	8.0	9.0	13/32	2679	44
275/65R17	115T	OWL	31.1	10.8	7.5	8.0	9.5	13/32	2680	44
285/65R17	116S	OWL	31.6	11.2	8.0	8.5	10.0	13/32	2756	44
255/55R18	109H XL	BSW	29.1	10.0	7.0	8.0	9.0	13/32	2270	50
255/60R18	112H XL	BSW	30.0	10.0	7.0	7.5	9.0	13/32	2469	50
265/60R18	114H XL	BSW	30.5	10.4	7.5	8.0	9.5	13/32	2601	50
265/60R18	110H	RWW	30.5	10.8	7.5	8.0	9.5	13/32	2337	44
265/65R18	114S	OWL	31.1	10.4	7.5	8.0	9.5	13/32	2601	44
265/70R18	116S	OWL	32.6	10.4	7.0	8.0	9.0	13/32	2756	44
275/65R18	116S	BSW	32.1	10.8	7.5	8.0	9.5	13/32	2756	44
285/60R18	116T	RWL	31.5	11.2	8.0	8.5	10.0	13/32	2756	44
265/50R20	111H XL	BSW	30.6	10.4	7.5	8.5	9.5	13/32	2403	50
275/55R20	117T XL	OWL	31.8	10.8	7.5	8.5	9.5	13/32	2835	50
275/60R20	115S	OWL	31.8	10.8	7.5	8.0	9.5	13/32	2679	44
305/50R20	120T XL	OWL	32.0	12.0	8.5	9.5	11.0	14/32	3086	50

BRAVO // AT-980



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
30X9.50R15LT	104S 6PR	OWL	29.4	9.5	6.5	7.5	8.5	17/32	1985	50
31X10.50R15LT	109S 6PR	OWL	30.4	10.5	7.0	8.5	9.0	17/32	2270	50
32X11.50R15LT	113R 6PR	OWL	31.5	11.4	8.0	9.0	10.0	17/32	2535	50
33X10.50R15LT	114Q 6PR	OWL	32.4	10.9	7.0	8.5	9.0	17/32	2600	50
33X12.50R15LT	108Q 6PR	OWL	32.4	12.6	8.5	10.0	11.0	17/32	2205	35
35X12.50R15LT*	113Q 6PR	OWL	34.5	12.5	8.5	10.0	11.0	17/32	2535	35
LT225/75R16	115/112S 10PR	OWL	29.3	8.8	6.0	6.0	7.0	16/32	S2680/D2470	80
LT235/85R16*	120/116S 10PR	BSW	31.7	9.3	6.0	7.0	7.5	16/32	S3042/D2778	80
LT245/70R16*	113/110S 8PR	OWL	29.7	9.7	7.0	8.0	8.5	16/32	S2535/D2335	65
LT245/75R16*	120/116S 10PR	OWL	30.5	9.8	6.5	7.0	8.0	16/32	S3042/D2778	80
LT255/70R16	115/112S 8PR	OWL	30.3	10.1	6.5	7.5	8.0	16/32	S2680/D2470	65
LT265/70R16	117/114S 8PR	OWL	30.8	10.6	7.0	8.0	8.5	16/32	S2835/D2600	65
LT265/75R16*	123/120Q 10PR	OWL	31.7	10.5	7.0	7.5	8.0	16/32	S3415/D3085	80
LT275/70R16	119/116Q 8PR	OWL	31.3	10.8	7.0	8.0	8.5	16/32	S3000/D2755	65

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BRAVO // AT-980 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
LT285/75R16	122/119R 8PR	OWL	32.8	11.4	7.5	8.0	9.0	17/32	S3305/D3000	65
LT225/70R17	110/107S 8PR	OWL	29.6	9.0	6.0	6.5	7.5	16/32	S2335/D2150	65
LT245/70R17	119/116S 10PR	OWL	30.6	9.3	6.5	7.0	8.0	16/32	S3000/D2755	80
LT265/65R17	117/114S 8PR	OWL	30.6	10.7	7.5	8.0	9.5	15/32	S2835/D2600	65
LT265/70R17	118/115Q 8PR	OWL	31.7	10.7	7.0	8.0	8.5	16/32	S2910/D2680	65
LT275/65R17	118/115S 8PR	OWL	31.2	11.0	7.5	8.0	9.5	15/32	S2910/D2680	65
LT285/70R17	121/118Q 8PR	OWL	32.8	11.5	7.5	8.5	9.0	17/32	S3195/D2910	65
LT255/60R18	112/109S 8PR	OWL	30.1	10.4	TBD	7.5	TBD	13/32	S2470/D2270	65
LT265/60R18	114/110S 8PR	OWL	30.6	10.8	7.5	8.0	9.5	13/32	S2600/D2335	65
LT285/60R18	118/115S 8PR	OWL	31.5	11.8	8.0	8.5	10.0	14/32	S2910/D2680	65
LT255/55R19	115/112S 10PR	BSW	30.2	10.1	TBD	8.0	TBD	13/32	S2680/D2470	80
215/75R15	102S XL	OWL	27.7	8.1	5.5	6.0	7.0	14/32	1874	50
235/75R15	109S XL	OWL	28.9	9.3	6.0	6.5	8.0	13/32	2271	50
235/70R16	106T	OWL	29.1	9.2	6.0	7.0	8.0	14/32	2094	44
255/65R17	110S	OWL	30.1	10.2	7.0	7.5	9.0	13/32	2337	44
265/65R17	112T	OWL	30.6	10.5	7.5	8.0	9.5	17/32	2467	44
275/65R18	116S	OWL	32.1	10.9	7.5	8.0	9.5	13/32	2756	44
265/55R20	113H XL	BSW	31.4	10.8	7.5	8.0	9.0	13/32	2535	50

RAZR // MT



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
32X11.50R15LT*	113Q 6PR	RBL	31.8	11.9	8.0	9.0	10.0	20/32	2535	50
33X10.50R15LT*	114Q 6PR	RBL	32.8	11.1	7.0	8.5	9.0	19/32	2600	50
33X12.50R15LT*	108Q 6PR	RBL	32.8	13.4	8.5	10.0	11.0	20/32	2205	35
35X12.50R15LT*	113Q 6PR	RBL	34.9	13.5	8.5	10.0	11.0	20/32	2535	35
35X12.50R17LT*	121Q 10PR	RBL	34.8	13.2	8.5	10.0	11.0	20/32	3195	65
35X13.50R17LT*	121Q 10PR	RBL	34.8	14.2	8.5	11.0	11.0	20/32	3195	65
37X12.50R17LT*	124Q 10PR	RBL	36.8	13.1	8.5	10.0	11.0	20/32	3525	65
40X13.50R17LT*	121Q 6PR	RBL	39.9	14.3	8.5	11.0	11.0	20/32	3195	35
35X12.50R18LT*	123Q 10PR	RBL	34.8	13.2	8.5	10.0	11.0	20/32	3415	65
37X12.50R18LT*	123Q 8PR	RBL	36.9	13.0	8.5	10.0	11.0	20/32	3415	50
35X12.50R20LT*	121Q 10PR	RBL	34.8	12.9	8.5	10.0	11.0	20/32	3750	65
37X13.50R20LT*	127Q 10PR	RBL	36.9	14.3	8.5	11.0	11.0	20/32	3860	65
38X13.50R20LT*	128Q 10PR	RBL	37.7	14.3	9.5	11.0	12.0	20/32	3970	65
40X13.50R20LT*	128Q 10PR	RBL	39.8	14.1	8.5	11.0	11.0	20/32	3970	65
37X13.50R22LT*	123Q 10PR	RBL	36.8	13.9	8.5	11.0	11.0	20/32	3415	65
LT245/75R16*	120/116Q 10PR	RBL	30.4	10.2	6.5	7.0	8.0	18/32	S3042/D2778	80

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

RAZR // MT continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
LT265/75R16*	123/120Q 10PR	RBL	31.9	11.0	7.0	7.5	8.0	18/32	S3415/D3085	80
LT285/75R16*	126/123Q 10PR	RBL	33.0	11.8	7.5	8.0	9.0	18/32	S3750/D3415	80
LT315/75R16*	127/124Q 10PR	RBL	34.8	12.8	8.0	8.5	11.0	19/32	S3860/D3525	65
LT265/70R17*	121/118Q 10PR	RBL	31.9	11.1	7.0	8.0	8.5	18/32	S3195/D2910	80
LT285/70R17*	121/118Q 10PR	RBL	33.0	11.9	7.5	8.5	9.0	18/32	S3195/D2910	80
LT295/70R17*	121/118Q 10PR	RBL	33.5	12.2	7.5	8.5	10.0	19/32	S3195/D2910	80
LT305/70R17*	121/118Q 10PR	RBL	34.0	12.8	8.0	9.0	9.5	19/32	S3195/D2910	65
LT315/70R17*	121/118Q 8PR	RBL	34.6	13.3	8.0	9.5	11.0	19/32	S3195/D2910	50
LT275/65R18*	123/120Q 10PR	RBL	32.5	11.1	7.5	8.0	9.0	18/32	S3415/D3085	80
LT275/70R18*	125/122Q 10PR	RBL	33.5	11.3	7.0	8.0	8.5	18/32	S3640/D3305	80
LT285/75R18*	129/126Q 10PR	RBL	35.0	11.8	7.5	8.0	9.5	18/32	S4080/D3750	80
LT295/65R18*	127/124Q 10PR	RBL	33.5	12.1	8.0	8.5	10.0	19/32	S3860/D3525	80
LT295/70R18*	129/126Q 10PR	RBL	34.6	12.3	7.5	8.5	10.0	19/32	S4080/D3750	80
LT275/65R20*	126/123Q 10PR	RBL	34.5	11.2	7.5	8.0	9.5	18/32	S3750/D3415	80
LT295/55R20*	123/120Q 10PR	RBL	33.4	12.1	8.0	9.5	10.0	19/32	S3415/D3085	80
LT295/60R20*	126/123Q 10PR	RBL	34.4	12.2	8.0	8.5	10.0	19/32	S3750/D3415	80
LT295/65R20*	129/126Q 10PR	RBL	35.7	12.0	8.0	8.5	10.0	19/32	S4080/D3750	80

* = 3-ply sidewall

BIGHORN // MT-764



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195R14C	106/104Q	BSW	26.2	7.8	5.0	5.5	6.0	17/32	S2095/D1985	65
205R16C	110/108Q	BSW	28.9	8.2	5.5	6.0	6.5	17/32	S2335/D2205	65
27X8.50R14LT	95Q 6PR	RWL	26.7	8.8	6.0	7.0	7.5	19/32	1520	50
30X9.50R15LT	104Q 6PR	RWL	29.7	9.8	6.5	7.5	8.5	19/32	1985	50
30X9.50R15LT	104Q 6PR	OWL	29.6	9.8	6.5	7.5	8.5	19/32	1985	50
31X10.50R15LT	109Q 6PR	RWL	30.6	11.1	7.0	8.5	9.0	20/32	2270	50
31X10.50R15LT	109Q 6PR	OWL	30.6	11.1	7.0	8.5	9.0	20/32	2270	50
35X12.50R17LT	113Q 6PR	RWL	32.0	11.8	8.0	9.0	10.0	20/32	2535	50
32X11.50R15LT	113R 6PR	RWL	32.0	11.8	8.0	9.0	10.0	20/32	2535	50
32X11.50R15LT	113R 6PR	OWL	32.0	11.8	8.0	9.0	10.0	20/32	2535	50
33X12.50R15LT	108Q 6PR	RWL	33.0	13.0	8.5	10.0	11.0	20/32	2205	35
33X12.50R15LT	108Q 6PR	OWL	32.0	13.0	8.5	10.0	11.0	20/32	2205	35
35X12.50R17LT*	119Q 8PR	RWL	34.9	13.0	8.5	10.0	11.0	21/32	3000	50
LT235/75R15	104/101Q 6PR	RWL	28.9	9.5	6.0	6.5	7.0	19/32	S1985/D1820	50
LT225/75R16	115/112Q 10PR	BSW	29.5	8.8	6.0	6.0	7.0	14/32	S2680/D2470	80
LT225/75R16	115/112Q 10PR	OWL	29.6	8.9	6.0	6.0	7.0	20/32	S2680/D2470	80
LT235/85R16*	120/116N 10PR	BSW	31.8	9.4	6.0	6.5	7.5	19/32	S3042/D2778	80

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BIGHORN // MT-764 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
LT235/85R16*	120/116N 10PR	OWL	31.8	9.4	6.0	6.5	7.5	19/32	S3042/D2778	80
LT245/70R16	113/110Q 8PR	OWL	29.6	9.6	6.5	7.0	7.5	20/32	S2535/D2335	65
LT245/75R16	108/104N 6PR	RWL	30.8	10.0	6.5	7.0	8.0	20/32	S2205/D2005	50
LT245/75R16*	120/116N 10PR	RWL	30.8	10.0	6.5	7.0	8.0	20/32	S3042/D2780	80
LT245/75R16*	120/116N 10PR	OWL	30.8	10.0	6.5	7.0	8.0	20/32	S3042/D2780	80
LT265/70R16	117/114Q 8PR	OWL	30.6	10.5	7.0	8.0	8.5	20/32	S2835/D2600	65
LT265/75R16	112/109N 6PR	RWL	32.0	10.9	7.0	7.5	8.0	20/32	S2470/D2270	50
LT265/75R16*	123/120N 10PR	RWL	32.0	10.7	7.0	7.5	8.0	20/32	S3415/D3085	80
LT265/75R16*	123/120N 10PR	OWL	32.0	10.8	7.0	7.5	8.0	20/32	S3415/D3085	80
LT225/70R17	110/107Q 8PR	BSW	29.5	8.6	6.0	6.5	7.5	19/32	S2340/D2150	65
LT265/65R17	117/114Q 8PR	OWL	30.9	10.7	7.5	8.0	9.5	20/32	S2835/D2600	65
LT265/70R17	118/115Q 8PR	RWL	31.9	10.6	7.0	8.0	8.5	20/32	S2910/D2680	65
LT265/70R17	118/115Q 8PR	OWL	31.9	10.6	7.0	8.0	8.5	20/32	S2910/D2680	65
LT275/65R18	119/116Q 8PR	BSW	32.2	11.0	7.5	8.0	9.0	20/32	S3000/D2755	65
LT275/65R18	119/116Q 8PR	OWL	32.2	11.0	7.5	8.0	9.0	20/32	S3000/D2755	65
LT275/60R20	119/116Q 8PR	BSW	33.0	11.1	7.5	8.0	9.5	19/32	S3000/D2755	65
LT305/50R20	111/108Q 8PR	BSW	32.2	12.3	8.5	9.5	11.0	20/32	S2405/D2205	50

* = 3-ply sidewall

CREEPY CRAWLER // M8090



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
6.50-16LT	100L 6PR	BSW	29.8	7.9	4.0	4.5	6.0	19/32	1760	45
7.00-16LT	103L 6PR	BSW	31.0	8.4	5.0	5.5	6.5	20/32	1930	45
7.00-16LT	109L 8PR	BSW	31.0	8.4	5.0	5.5	6.5	20/32	2260	60
255/85-16LT	104L 8PR	BSW	33.1	10.0	6.5	7.0	8.0	23/32	1985	35
35X12.50-15LT	113L 6PR	BSW	34.8	13.6	8.5	10.0	11.0	27/32	2535	30
37X12.50-15LT	117L 8PR	BSW	37.0	13.4	8.5	10.0	11.0	27/32	2830	45
37X14.50-15LT	127L 8PR	BSW	37.0	15.3	9.5	12.0	12.5	27/32	3860	45
38X13.00-15LT	128L 8PR	BSW	38.0	13.5	8.5	10.0	11.0	27/32	3970	45
35X12.50-16LT	112L 6PR	BSW	35.2	13.1	8.5	10.0	11.0	27/32	2470	30
37X12.50-16LT	124L 8PR	BSW	36.8	13.4	8.5	10.0	11.0	27/32	3525	45
37X14.50-16LT	126L 8PR	BSW	37.0	14.3	10.0	12.0	12.0	27/32	3750	45
38.5X14.50-16LT	129L 8PR	BSW	38.5	15.3	10.0	12.0	12.0	27/32	4080	45
40X13.50-17LT	123L 8PR	BSW	40.2	14.5	8.5	11.0	11.0	27/32	3420	45
35X12.50-20LT	121L 10PR	RBL	35.4	12.4	8.5	10.0	11.0	27/32	3195	60
37X12.50-20LT	126L 10PR	RBL	37.4	13.2	8.5	10.0	11.0	27/32	3750	60
37X12.50-16LT	124L 8PR	BSW	37.0	13.4	8.5	10.0	11.0	27/32	3525	45
40X13.50-17LT	123L 8PR	BSW	40.2	14.5	8.5	11.0	11.0	27/32	3420	45

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWL - Raised White Wall; RLW - Raised White Letters

TREPADOR BIAS // M8060



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
35X12.50-15LT	113L 6PR	BSW	35.0	13.2	8.5	10.0	11.0	22/32	2535	30
35X12.50-15LT	121L 8PR	BSW	35.1	13.2	8.5	10.0	11.0	22/32	3195	45
35X12.50-16LT	112L 6PR	BSW	34.6	13.2	8.5	10.0	11.0	22/32	2470	30
35X12.50-16LT	120L 8PR	BSW	35.0	13.2	8.5	10.0	11.0	22/32	3085	45
37X12.50-16LT	124L 8PR	BSW	36.8	13.4	8.5	10.0	11.0	22/32	3525	45
35X12.50-17LT	119L 8PR	BSW	34.6	12.6	8.5	10.0	11.0	22/32	3000	45
37X12.50-17LT	124L 10PR	BSW	37.1	13.2	8.5	10.0	11.0	22/32	3525	45
37X13.50-17LT	126L 10PR	BSW	37.3	14.5	8.5	11.0	11.0	22/32	3750	60
40X13.50-17LT	123L 8PR	BSW	40.2	14.3	8.5	11.0	11.0	22/32	3420	45
35X12.50-20LT	121L 10PR	BSW	35.1	12.2	8.5	10.0	11.0	22/32	3195	60
42X14.50-17LT	121L 6PR	BSW	42.9	15.3	10.0	12.0	12.0	22/32	3195	30

TREPADOR COMPETITION// M8060



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
37X12.50-16LT	124L 8PR	BSW	37.0	13.4	8.5	10.0	11.0	23/32	3525	45
37X12.50-17LT	124L 10PR	BSW	37.1	13.2	8.5	10.0	11.0	23/32	3525	45
40X13.50-17LT	123L 8PR	BSW	40.2	14.3	8.5	11.0	11.0	23/32	3420	45
42X14.50-17LT	121L 6PR	BSW	42.9	15.3	10.0	12.0	12.0	22/32	3195	30

TREPADOR RADIAL// M8060



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/70R15C	104/102Q 6PR	BSW	26.4	8.3	5.0	6.0	7.0	16/32	S1985/D1875	55
205R16C	110/108Q 8PR	BSW	28.9	8.1	5.5	6.0	6.5	17/32	S2337/D2205	65
LT235/75R15	104/101Q 6PR	BSW	29.0	9.4	6.0	6.5	7.0	19/32	S1985/D1820	50
30X9.50R15LT	104Q 6PR	BSW	29.9	9.8	6.5	7.5	8.5	20/32	1985	50
31X10.50R15LT	109Q 6PR	BSW	30.6	10.8	7.0	8.5	9.0	20/32	2270	50
33X12.50R15LT	108Q 6PR	BSW	32.8	12.4	8.5	10.0	11.0	21/32	2205	35
35X12.50R15LT*	113Q 6PR	BSW	34.6	13.1	8.5	10.0	11.0	21/32	2535	35
35X12.50R16LT*	121Q 8PR	BSW	34.6	13.0	8.5	10.0	11.0	21/32	3195	50
35X12.50R17LT*	119Q 8PR	BSW	34.6	12.6	8.5	10.0	11.0	21/32	3000	50
37X12.50R17LT*	124Q 8PR	BSW	36.9	13.0	8.5	10.0	11.0	21/32	3525	50
40X13.50R17LT*	121Q 6PR	BSW	39.8	14.0	8.5	11.0	11.0	21/32	3195	35
33X13.00R18LT	124Q 10PR	BSW	33.3	13.1	8.5	9.5	11.0	21/32	3530	65
35X13.00R18LT	127Q 10PR	BSW	34.6	13.1	8.5	9.5	11.0	21/32	3860	65

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters



TREPADOR RADIAL// M8060 continued

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
40X13.50R18LT*	129Q 8PR	BSW	39.8	13.8	8.5	11.0	11.0	21/32	4080	50
33X12.00R20LT	121Q 10PR	BSW	33.2	12.2	8.0	9.5	10.5	21/32	3200	65
35X13.00R20LT	121Q 8PR	BSW	35.0	13.1	9.0	9.5	11.5	21/32	3200	50
40X15.50R22LT	127Q 8PR	BSW	39.6	14.8	11.0	12.0	14.0	21/32	3860	50

* = 3-ply sidewall

ARCTIC TREKKER // NP-3



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
155/70R13	75T	BSW	21.6	6.1	4.0	4.5	5.0	11/32	853	44
175/70R13	82T	BSW	22.8	6.9	4.5	5.0	6.0	11/32	1047	44
155/65R14	75T	BSW	22.0	6.1	4.5	4.5	5.5	11/32	853	44
175/65R14	82T	BSW	23.0	6.9	5.0	5.0	6.0	11/32	1047	44
175/70R14	88T XL	BSW	23.8	6.9	4.5	5.0	6.0	11/32	1235	50
185/60R14	86T XL	BSW	22.8	7.3	5.0	5.5	6.5	12/32	1168	50
185/65R14	90T XL	BSW	23.5	7.3	5.0	5.5	6.5	12/32	1323	50
185/70R14	88T	BSW	24.3	7.3	4.5	5.5	6.0	12/32	1235	44
175/65R15	88T XL	BSW	23.9	6.9	5.0	5.0	6.0	11/32	1235	50
185/55R15	86T XL	BSW	23.0	7.3	5.0	6.0	6.5	13/32	1168	50
185/60R15	88T XL	BSW	23.7	7.3	5.0	5.5	6.5	13/32	1235	50
185/65R15	92T XL	BSW	24.4	7.3	5.0	5.5	6.5	13/32	1389	50
195/55R15	89T XL	BSW	23.4	7.7	5.5	6.0	7.0	13/32	1279	50
195/60R15	92T XL	BSW	24.2	7.7	5.5	6.0	7.0	13/32	1389	50
195/65R15	95T XL	BSW	25.0	7.7	5.5	6.0	7.0	13/32	1521	50
205/65R15	99T XL	BSW	25.5	8.1	5.5	6.0	7.5	13/32	1709	50
195/55R16	87T	BSW	24.4	7.7	5.5	6.0	7.0	12/32	1201	44
205/55R16	94T XL	BSW	24.9	8.1	5.5	6.5	7.5	13/32	1477	50
205/60R16	96T XL	BSW	25.7	8.1	5.5	6.0	7.5	13/32	1565	50
205/65R16	99T XL	BSW	26.5	8.1	5.5	6.0	7.5	12/32	1709	50
215/55R16	97T XL	BSW	25.4	8.5	6.0	7.0	7.5	12/32	1609	50
215/60R16	99T XL	BSW	26.1	8.5	6.0	6.5	7.5	12/32	1709	50
215/65R16	102T XL	BSW	27.0	8.5	6.0	6.5	7.5	13/32	1874	50
225/55R16	99T XL	BSW	25.7	8.9	6.0	7.0	8.0	12/32	1709	50
225/60R16	102T XL	BSW	26.5	8.9	6.0	6.5	8.0	12/32	1874	50
205/50R17	93T XL	BSW	25.2	8.1	5.5	6.5	7.5	12/32	1433	50
215/50R17	95T XL	BSW	25.5	8.5	6.0	7.0	7.5	13/32	1521	50
215/55R17	98T XL	BSW	26.3	8.5	6.0	7.0	7.5	13/32	1653	50
215/60R17	100T XL	BSW	27.2	8.5	6.0	6.5	7.5	13/32	1764	50
225/45R17	94T XL	BSW	25.0	8.9	7.0	7.5	8.5	12/32	1477	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters



ARCTIC TREKKER // NP-3 continued

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
225/50R17	98T XL	BSW	25.9	8.9	6.0	7.0	8.0	13/32	1653	50
225/55R17	101T XL	BSW	26.9	8.9	6.0	7.0	8.0	12/32	1819	50
235/45R17	97T XL	BSW	25.4	9.3	7.5	8.0	9.0	12/32	1609	50
235/55R17	103T XL	BSW	27.2	9.3	6.5	7.5	8.5	13/32	1929	50

PREMITRA// NS-5



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
215/65 R16	98T	BSW	27.0	8.5	6.0	6.5	7.5	12/32	1653	44
225/65 R17	102T	BSW	28.5	8.9	6.0	6.5	8.0	12/32	1874	44
265/65 R17	116T XL	BSW	30.6	10.4	7.5	8.0	9.5	12/32	2756	50
235/65 R17	108T XL	BSW	29.1	9.3	6.5	7.0	8.5	12/32	2205	50
215/60 R17	96T	BSW	27.2	8.7	6.0	6.5	7.5	TBD	1565	44
225/60 R17	103T XL	BSW	27.6	9.0	6.0	6.5	8.0	TBD	1929	50
235/60 R18	107T XL	BSW	29.1	9.3	6.5	7.0	8.5	TBD	2149	50
235/75 R15	105T	BSW	28.9	9.3	6.0	6.5	8.0	TBD	2039	44
235/55 R18	104T XL	BSW	28.1	9.3	6.5	7.5	8.5	TBD	1984	50
255/55 R18	109T XL	BSW	29.0	10.0	7.0	8.0	9.0	TBD	2271	50
215/70 R16	100T	BSW	27.9	8.5	5.5	6.5	7.0	TBD	1764	44
225/70 R16	103T	BSW	28.4	8.9	6.0	6.5	7.5	TBD	1929	44
265/70 R16	112T	BSW	30.6	10.4	7.0	8.0	9.0	TBD	2469	44
275/70 R16	114T	BSW	31.2	10.8	7.0	8.0	9.0	TBD	2601	44
235/70 R16	106T	BSW	29.0	9.3	6.0	7.0	8.0	TBD	2094	44
245/70 R16	111T XL	BSW	29.5	9.6	6.5	7.0	8.0	TBD	2403	50



ARCTIC TREKKER // SP-02

Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
155/65R13	73T	BSW	21.0	6.1	4.5	4.5	5.5	10/32	805	44
175/70R13	82T	BSW	22.8	6.9	4.5	5.0	6.0	11/32	1047	44
155/65R14	75T	BSW	22.0	6.1	4.5	4.5	5.5	10/32	853	44
165/70R14	81T	BSW	23.1	6.5	4.0	5.0	5.5	11/32	1019	44
175/65R14	82T	BSW	23.0	6.9	5.0	5.0	6.0	11/32	1047	44
185/60R14	82T	BSW	22.8	7.3	5.0	5.5	6.5	11/32	1047	44
185/65R14	90T XL	BSW	23.6	7.3	5.0	5.5	6.5	11/32	1323	50
185/70R14	88T	BSW	24.4	7.3	4.5	5.5	6.0	11/32	1235	44
175/65R15	84T	BSW	24.0	6.9	5.0	5.0	6.0	11/32	1102	44
185/55R15	82T	BSW	23.1	7.3	5.0	6.0	6.5	11/32	1047	44
185/60R15	84T	BSW	23.8	7.3	5.0	5.5	6.5	11/32	1102	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ARCTIC TREKKER // SP-02 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
185/65R15	92T XL	BSW	24.6	7.3	5.0	5.5	6.5	11/32	1389	50
195/50R15	82T	BSW	22.8	7.7	5.5	6.0	7.0	11/32	1047	44
195/55R15	89T XL	BSW	23.5	7.7	5.5	6.0	7.0	11/32	1279	50
195/60R15	92T XL	BSW	24.2	7.7	5.5	6.0	7.0	11/32	1389	50
195/65R15	95T XL	BSW	25.1	7.7	5.5	6.0	7.0	11/32	1521	50
205/65R15	94T	BSW	25.6	8.1	5.5	6.0	7.5	11/32	1477	44
195/50R16	84T	BSW	23.7	7.7	5.5	6.0	7.0	10/32	1102	44
195/55R16	91T XL	BSW	24.4	7.7	5.5	6.0	7.0	11/32	1356	50
205/45R16	83T	BSW	23.2	8.1	6.5	7.0	7.5	10/32	1074	44
205/55R16	94T XL	BSW	24.9	8.1	5.5	6.5	7.5	11/32	1477	50
205/60R16	96T XL	BSW	25.7	8.1	5.5	6.0	7.5	11/32	1565	50
205/65R16	95T	BSW	26.5	8.1	5.5	6.0	7.5	11/32	1521	44
215/55R16	97T XL	BSW	25.3	8.5	6.0	7.0	7.5	11/32	1609	50
215/60R16	99T XL	BSW	26.1	8.5	6.0	6.5	7.5	11/32	1709	50
225/55R16	99T XL	BSW	25.9	8.9	6.0	7.0	8.0	11/32	1709	50
205/50R17	93T XL	BSW	25.2	8.1	5.5	6.5	7.5	11/32	1433	50
215/50R17	91T	BSW	25.6	8.5	6.0	7.0	7.5	11/32	1356	44
215/55R17	98T XL	BSW	26.4	8.5	6.0	7.0	7.5	11/32	1653	50
225/45R17	94T XL	BSW	25.1	8.9	7.0	7.5	8.5	11/32	1477	50
225/50R17	98T XL	BSW	25.9	8.9	6.0	7.0	8.0	11/32	1653	50
225/55R17	101T XL	BSW	26.9	8.9	6.0	7.0	8.0	11/32	1819	50
235/45R17	97T XL	BSW	25.4	9.3	7.5	8.0	9.0	11/32	1609	50
235/50R17	100T XL	BSW	27.3	9.3	6.5	7.5	8.5	11/32	1764	50
235/55R17	99S	BSW	27.2	9.3	6.5	7.5	8.5	11/32	1709	44
245/45R17	99S XL	BSW	25.7	9.6	7.5	8.0	9.0	11/32	1709	50
255/45R17	98T	BSW	26.1	10.0	8.0	8.5	9.5	11/32	1653	44
225/40R18	92S XL	BSW	25.2	8.9	7.5	8.0	9.0	11/32	1389	50
225/45R18	95S XL	BSW	26.1	8.9	7.0	7.5	8.5	11/32	1521	50
235/45R18	98T XL	BSW	26.3	9.3	7.5	8.0	9.0	11/32	1653	50
235/50R18	97S	BSW	27.3	9.3	6.5	7.5	8.5	11/32	1609	44
245/40R18	93S	BSW	25.6	9.6	8.0	8.5	9.5	11/32	1433	44
245/45R18	100S XL	BSW	26.7	9.6	7.5	8.0	9.0	11/32	1764	50
245/50R18	100T	BSW	27.7	9.6	7.0	7.5	8.5	11/32	1764	44
255/40R18	95T	BSW	26.0	10.0	8.5	9.0	10.0	11/32	1521	44
255/55R18	105S	BSW	29.0	10.0	7.0	8.0	9.0	12/32	2039	44
255/40R19	100S XL	BSW	27.2	10.0	8.5	9.0	10.0	11/32	1764	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

PREMITRA // SP-03



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
155/65R13	73T	BSW	20.9	6.1	4.5	4.5	5.5	10/32	805	44
155/70R13	75T	BSW	21.5	6.1	4.0	4.5	5.0	10/32	853	44
165/70R13	79T	BSW	22.1	6.5	4.0	5.0	5.5	11/32	963	44
175/70R13	82T	BSW	22.7	6.9	4.5	5.0	6.0	11/32	1047	44
165/70R14	81T	BSW	23.1	6.5	4.0	5.0	5.5	11/32	1019	44
175/65R14	82T	BSW	23.0	6.9	5.0	5.0	6.0	11/32	1047	44
175/70R14	84T	BSW	23.6	6.9	4.5	5.0	6.0	11/32	1102	44
185/60R14	82T	BSW	22.8	7.3	5.0	5.5	6.5	11/32	1047	44
185/65R14	86T	BSW	23.5	7.3	5.0	5.5	6.5	11/32	1168	44
185/70R14	88T	BSW	24.2	7.3	4.5	5.5	6.0	11/32	1234	44
175/65R15	84T	BSW	24.0	6.9	5.0	5.0	6.0	11/32	1102	44
185/55R15	82T	BSW	23.0	7.3	5.0	6.0	6.5	10/32	1047	44
185/60R15	84T	BSW	23.7	7.3	5.0	5.5	6.5	11/32	1102	44
185/65R15	88T	BSW	24.5	7.3	5.0	5.5	6.5	11/32	1234	44
195/50R15	82T	BSW	22.7	7.7	5.5	6.0	7.0	10/32	1047	44
195/55R15	85T	BSW	23.4	7.7	5.5	6.0	7.0	11/32	1135	44
195/60R15	88T	BSW	24.2	7.7	5.5	6.0	7.0	11/32	1235	44
195/65R15	91T	BSW	25.0	7.7	5.5	6.0	7.0	11/32	1355	44
205/60R15	91T	BSW	24.7	8.1	5.5	6.0	7.5	11/32	1356	44
205/65R15	94T	BSW	25.5	8.1	5.5	6.0	7.5	11/32	1477	44
195/55R16	87T	BSW	24.4	7.7	5.5	6.0	7.0	11/32	1201	44
195/60R16	89T	BSW	25.2	7.7	5.5	6.0	7.0	11/32	1279	44
205/55R16	91T	BSW	24.9	8.1	5.5	6.5	7.5	11/32	1355	44
205/60R16	92T	BSW	25.7	8.1	5.5	6.0	7.5	11/32	1388	44
205/65R16	95T	BSW	26.5	8.1	5.5	6.0	7.5	11/32	1521	44

PRESA // SS-01



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
205/70R15	96Q	BSW	26.3	8.1	5.0	6.0	7.0	14/32	1565	44
215/70R15	98Q	BSW	26.9	8.5	5.5	6.5	7.0	14/32	1653	44
215/75R15	100Q	BSW	27.8	8.5	5.5	6.0	7.0	14/32	1764	44
235/75R15	105Q	BSW	28.9	9.3	6.0	6.5	8.0	14/32	2039	44
265/70R15	112Q	BSW	29.6	10.4	7.0	8.0	9.0	14/32	2469	44
175/80R16	91Q	BSW	27.1	6.9	5.0	5.0	5.0	13/32	1356	44
215/65R16	98Q	BSW	27.1	8.5	6.0	6.5	7.5	14/32	1653	44
215/70R16	100Q	BSW	27.9	8.5	5.5	6.5	7.0	14/32	1764	44
225/70R16	103Q	BSW	28.4	8.9	6.0	6.5	7.5	14/32	1929	44
235/60R16	100Q	BSW	27.2	9.3	6.5	7.0	8.5	14/32	1764	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

PRESA // SS-01 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
235/70R16	106Q	BSW	29.0	9.3	6.0	7.0	8.0	14/32	2094	44
245/70R16	107Q	BSW	29.6	9.6	6.5	7.0	8.0	14/32	2149	44
245/75R16	111Q	BSW	30.5	9.6	6.5	7.0	8.0	14/32	2403	44
255/65R16	109Q	BSW	29.1	10.0	7.0	7.5	9.0	14/32	2271	44
265/70R16	112Q	BSW	30.6	10.4	7.0	8.0	9.0	14/32	2469	44
275/70R16	114Q	BSW	31.2	10.8	7.0	8.0	9.0	14/32	2601	44
215/60R17	96Q	BSW	27.1	8.5	6.0	6.5	7.5	14/32	1565	44
225/60R17	99T	BSW	27.6	8.9	6.0	6.5	8.0	14/32	1709	44
225/65R17	102Q	BSW	28.6	8.9	6.0	6.5	8.0	14/32	1874	44
235/65R17	108Q XL	BSW	29.1	9.3	6.5	7.0	8.5	14/32	2205	50
245/65R17	107Q	BSW	29.6	9.6	7.0	7.0	8.5	14/32	2150	44
255/60R17	106Q	BSW	29.1	10.0	7.0	7.5	9.0	14/32	2094	44
265/65R17	112Q	BSW	30.6	10.4	7.5	8.0	9.5	14/32	2469	44
275/65R17	115Q	BSW	31.2	10.8	7.5	8.0	9.5	14/32	2679	44
285/65R17	116Q	BSW	31.7	11.2	8.0	8.5	10.0	14/32	2756	44
215/55R18	99Q XL	BSW	27.3	8.5	6.0	7.0	7.5	14/32	1709	50
225/55R18	102Q XL	BSW	27.8	8.9	6.0	7.0	8.0	14/32	1874	50
225/60R18	100T	BSW	28.5	8.9	6.0	6.5	8.0	14/32	1764	44
235/55R18	100Q	BSW	28.1	9.3	6.5	7.5	8.5	14/32	1764	44
235/60R18	103Q	BSW	29.2	9.3	6.5	7.0	8.5	14/32	1929	44
245/60R18	105Q	BSW	29.6	9.6	7.0	7.0	8.5	14/32	2039	44
255/55R18	109T XL	BSW	29.0	10.0	7.0	8.0	9.0	14/32	2270	50
255/60R18	112T XL	BSW	30.0	10.0	7.0	7.5	9.0	14/32	2469	50
265/60R18	110Q	BSW	30.5	10.4	7.5	8.0	9.5	14/32	2337	44
285/60R18	116Q	BSW	31.5	11.2	8.0	8.5	10.0	14/32	2756	44
235/55R19	105Q XL	BSW	29.3	9.3	6.5	7.5	8.5	14/32	2039	50
245/55R19	103T	BSW	29.8	9.6	7.0	7.5	8.5	14/32	1929	44
255/50R19	107T XL	BSW	29.3	10.0	7.0	8.0	9.0	14/32	2149	50
255/55R19	111R XL	BSW	30.2	10.0	7.0	8.0	9.0	14/32	2403	50
265/50R19	110Q XL	BSW	29.5	10.4	7.5	8.5	9.5	14/32	2337	50
275/45R19	108R XL	BSW	28.9	10.8	8.5	9.0	10.5	14/32	2205	50
275/55R19	111Q	BSW	30.9	10.8	7.5	8.5	9.5	14/32	2403	44
255/50R20	109Q XL	BSW	30.1	10.0	7.0	8.0	9.0	14/32	2271	50
275/40R20	106R XL	BSW	28.7	10.8	9.0	9.5	11.0	14/32	2094	50
275/45R20	110T XL	BSW	29.9	10.8	8.5	9.0	10.5	14/32	2337	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ARCTIC TREKKER // AP-2



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
145/70R13	71T	BSW	21.1	6.0	3.5	4.5	5.0	10/32	761	44
145/80R13	79T XL	BSW	22.4	5.7	3.5	4.0	5.0	10/32	963	50
155/65R13	73T	BSW	21.1	5.9	4.5	4.5	5.5	10/32	805	44
155/70R13	75T	BSW	21.6	6.1	4.0	4.5	5.0	10/32	853	44
155/80R13	83T XL	BSW	22.9	6.3	4.0	4.5	5.0	10/32	1074	50
165/65R13	77T	BSW	21.5	6.5	4.5	5.0	6.0	10/32	908	44
165/70R13	83T XL	BSW	22.2	6.5	4.0	5.0	5.5	10/32	1074	50
165/80R13	87T XL	BSW	23.5	6.5	4.0	4.5	5.5	10/32	1201	50
175/65R13	80T	BSW	22.1	6.8	5.0	5.0	6.0	11/32	992	44
175/70R13	82T	BSW	22.7	6.9	4.5	5.0	6.0	10/32	1047	44
185/70R13	86T	BSW	23.3	7.6	4.5	5.5	6.0	11/32	1168	44
155/65R14	79T XL	BSW	22.0	6.1	4.5	4.5	5.5	10/32	963	50
165/60R14	79H XL	BSW	22.0	6.5	4.5	5.0	6.0	11/32	963	50
165/65R14	83T XL	BSW	22.6	6.5	4.5	5.0	6.0	10/32	1074	50
165/70R14	85T XL	BSW	23.3	6.8	4.0	5.0	5.5	10/32	1135	50
175/60R14	79H	BSW	22.4	6.9	5.0	5.0	6.0	11/32	963	44
175/65R14	86H XL	BSW	25.1	6.9	5.0	5.0	6.0	11/32	1168	50
175/70R14	88T XL	BSW	23.7	6.9	4.5	5.0	6.0	10/32	1235	50
175/80R14	88H	BSW	25.1	7.1	4.5	5.0	6.0	10/32	1235	44
175/80R14	88T	BSW	25.1	7.1	4.5	5.0	6.0	10/32	1235	44
185/55R14	80H	BSW	22.1	7.3	5.0	6.0	6.5	10/32	992	44
185/60R14	82H	BSW	22.8	7.3	5.0	5.5	6.5	11/32	1047	44
185/65R14	86H	BSW	23.5	7.4	5.0	5.5	6.5	11/32	1168	44
185/70R14	92H XL	BSW	24.4	7.5	4.5	5.5	6.0	11/32	1389	50
195/60R14	86H	BSW	23.2	7.9	5.5	6.0	7.0	11/32	1168	44
195/65R14	93H XL	BSW	24.0	7.7	5.5	6.0	7.0	11/32	1433	50
195/65R14	89H	BSW	24.0	7.9	5.5	6.0	7.0	11/32	1279	44
135/80R15	73T	BSW	23.6	5.2	3.5	3.5	4.5	10/32	805	44
145/65R15	72T	BSW	22.5	5.8	4.0	4.5	5.0	10/32	783	44
155/60R15	74T	BSW	22.4	6.0	4.5	4.5	5.5	11/32	827	44
165/60R15	77T	BSW	22.9	6.6	4.5	5.0	6.0	11/32	908	44
165/65R15	81T	BSW	23.5	6.5	4.5	5.0	6.0	10/32	1019	44
175/55R15	77T	BSW	22.6	7.1	5.0	5.5	6.0	10/32	908	44
175/60R15	81H	BSW	23.3	6.9	5.0	5.0	6.0	11/32	1019	44
175/65R15	88H XL	BSW	24.0	6.9	5.0	5.0	6.0	11/32	1235	50
185/55R15	86V XL	BSW	23.1	7.3	5.0	6.0	6.5	10/32	1168	50
185/60R15	88H XL	BSW	23.7	7.3	5.0	5.5	6.5	11/32	1235	50
185/65R15	92H XL	BSW	24.5	7.3	5.0	5.5	6.5	11/32	1389	50
195/50R15	86V XL	BSW	22.9	7.8	5.5	6.0	7.0	11/32	1168	50
195/55R15	89V XL	BSW	23.6	7.8	5.5	6.0	7.0	10/32	1279	50
195/60R15	88H	BSW	24.2	7.7	5.5	6.0	7.0	11/32	1235	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ARCTIC TREKKER // AP-2 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195/65R15	91H	BSW	25.0	8.0	5.5	6.0	7.0	11/32	1356	44
195/65R15	95H XL	BSW	25.0	7.7	5.5	6.0	7.0	11/32	1521	50
205/50R15	89V XL	BSW	23.3	8.1	5.5	6.5	7.5	11/32	1279	50
205/55R15	88V	BSW	24.0	8.1	5.5	6.5	7.5	11/32	1235	44
205/60R15	95H XL	BSW	24.8	8.2	5.5	6.0	7.5	11/32	1521	50
205/65R15	100H XL	BSW	25.6	8.1	5.5	6.0	7.5	11/32	1764	50
215/65R15	100H XL	BSW	26.0	8.7	6.0	6.5	7.5	11/32	1764	50
185/50R16	81V	BSW	23.4	7.3	5.0	6.0	6.5	11/32	1019	44
185/55R16	87H XL	BSW	24.2	7.5	5.0	6.0	6.5	10/32	1201	50
195/45R16	84V XL	BSW	22.9	7.7	6.0	6.5	7.5	11/32	1102	50
195/50R16	88V XL	BSW	23.7	7.7	5.5	6.0	7.0	11/32	1235	50
195/55R16	91V XL	BSW	24.4	7.7	5.5	6.0	7.0	11/32	1356	50
205/45R16	87V XL	BSW	23.2	8.1	6.5	7.0	7.5	11/32	1201	50
205/50R16	87V	BSW	24.3	8.4	5.5	6.5	7.5	11/32	1201	44
205/55R16	94V XL	BSW	24.9	8.1	5.5	6.5	7.5	11/32	1477	50
205/55R16	91H	BSW	25.0	8.1	5.5	6.5	7.5	11/32	1356	44
205/60R16	96V XL	BSW	25.8	8.2	5.5	6.0	7.5	11/32	1565	50
215/45R16	90V XL	BSW	23.7	8.4	7.0	7.0	8.0	11/32	1323	50
215/55R16	97V XL	BSW	25.3	8.9	6.0	7.0	7.5	11/32	1609	50
215/60R16	99H XL	BSW	26.1	8.7	6.0	6.5	7.5	11/32	1709	50
215/65R16	102H XL	BSW	27.0	8.5	6.0	6.5	7.5	11/32	1874	50
225/50R16	96V XL	BSW	25.0	9.2	6.0	7.0	8.0	11/32	1565	50
225/55R16	99V XL	BSW	25.8	9.1	6.0	7.0	8.0	11/32	1709	50
225/60R16	102V XL	BSW	26.5	9.1	6.0	6.5	8.0	11/32	1874	50
205/40R17	84V XL	BSW	23.3	8.4	7.0	7.5	8.0	10/32	1102	50
205/45R17	88V XL	BSW	24.3	8.1	6.5	7.0	7.5	11/32	1235	50
205/50R17	93V XL	BSW	25.2	8.1	5.5	6.5	7.5	11/32	1433	50
205/55R17	95V XL	BSW	26.0	8.4	5.5	6.5	7.5	11/32	1521	50
215/40R17	87V XL	BSW	23.6	8.6	7.0	7.5	8.5	11/32	1201	50
215/45R17	91V XL	BSW	24.6	8.5	7.0	7.0	8.0	11/32	1356	50
215/50R17	95V XL	BSW	25.6	8.5	6.0	7.0	7.5	11/32	1521	50
215/55R17	98V XL	BSW	26.3	8.5	6.0	7.0	7.5	11/32	1653	50
215/60R17	96H	BSW	27.2	8.5	6.0	6.5	7.0	TBD	1565	44
215/65R17	99V	BSW	28.0	8.5	6.0	6.5	7.0	TBD	1709	44
225/45R17	94V XL	BSW	25.1	8.8	7.0	7.5	8.5	11/32	1477	50
225/50R17	98V XL	BSW	26.1	9.1	6.0	7.0	8.0	11/32	1653	50
225/55R17	101V XL	BSW	26.8	8.9	6.0	7.0	8.0	11/32	1819	50
225/60R17	99V	BSW	27.6	8.9	6.0	6.5	8.0	11/32	1709	44
225/65R17	102H	BSW	28.5	8.9	6.0	6.5	7.0	TBD	1874	44
235/45R17	97V XL	BSW	25.4	9.2	7.5	8.0	9.0	11/32	1609	50
235/55R17	103V XL	BSW	27.2	9.3	7.0	7.5	8.0	TBD	1929	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ARCTIC TREKKER // AP-2 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
235/60R17	106H XL	BSW	28.1	9.3	6.5	7.0	7.5	TBD	2094	50
235/65R17	108V XL	BSW	29.1	9.3	6.5	7.0	7.5	TBD	2205	50
245/45R17	99V XL	BSW	25.6	9.6	7.5	8.0	9.0	11/32	1709	50
215/55R18	95V	BSW	27.5	8.7	6.0	7.0	7.5	11/32	1521	44
215/55R18	99V XL	BSW	27.3	8.5	6.5	7.0	7.5	TBD	1709	50
225/40R18	92V XL	BSW	24.9	9.1	7.5	8.0	9.0	11/32	1389	50
225/45R18	95V XL	BSW	26.1	8.7	7.0	7.5	8.5	11/32	1521	50
225/55R18	98V	BSW	28.0	9.1	6.0	7.0	8.0	11/32	1653	44
235/40R18	95V XL	BSW	25.2	9.5	8.0	8.5	9.5	11/32	1521	50
235/50R18	97V	BSW	27.3	9.3	7.0	7.5	8.0	TBD	1609	44
235/60R18	107V XL	BSW	29.1	9.3	6.5	7.0	7.5	11/32	2149	50
235/65R18	110H XL	BSW	30.0	9.3	6.5	7.0	7.5	TBD	2337	50
245/40R18	97V XL	BSW	25.7	9.6	8.0	8.5	9.5	11/32	1609	50
245/45R18	100V XL	BSW	26.7	9.5	7.5	8.0	9.0	11/32	1764	50
255/55R18	109V XL	BSW	29.0	10.0	7.5	8.0	8.5	TBD	2271	50
255/60R18	112V XL	BSW	30.0	10.0	7.0	7.5	8.0	TBD	2469	50
265/60R18	110H	BSW	30.5	10.4	7.5	8.0	8.5	TBD	2337	44
225/45R19	96V XL	BSW	27.2	8.7	7.0	7.5	8.5	11/32	1565	50
235/55R19	101V	BSW	29.2	9.3	7.0	7.5	8.0	TBD	1819	44
255/50R19	107W XL	BSW	29.1	10.0	7.5	8.0	8.5	TBD	2149	50
255/45R20	105W XL	BSW	29.1	10.0	8.0	8.5	9.0	TBD	2039	50
275/45R20	110W XL	BSW	29.8	10.8	8.5	9.0	9.5	TBD	2337	50

VANSMArt ALL SEASON // AL2



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175/R14C	99/98R	BSW	25.1	7.1	4.5	5.0	5.5	12/32	S1710/D1655	65
185/R14C	102/100R	BSW	25.7	7.5	5.0	5.5	6.0	12/32	S1875/D1765	65
195R14C	106/104R	BSW	26.5	7.6	5.0	5.5	6.0	13/32	S2095/D1985	65
165/70R14C	89/87R	BSW	23.4	6.5	4.5	5.0	5.0	12/32	S1280/D1200	54
175/70R14C	95/93T	BSW	23.9	6.8	4.5	5.0	5.5	12/32	S1520/D1435	54
195/70R15C	104/102R	BSW	25.9	7.9	5.0	6.0	6.0	12/32	S1985/D1875	65
205/65R15C	102/100T	BSW	25.6	8.1	5.5	6.0	6.5	13/32	S1875/D1765	54
205/70R15C	106/104R	BSW	26.5	8.1	5.5	6.0	6.5	13/32	S2095/D1985	65
215/65R15C	104/102T	BSW	26.1	8.7	6.0	6.5	7.0	13/32	S1985/D1875	54
215/70R15C	109/107T	BSW	27.0	8.7	5.5	6.5	7.0	13/32	S2270/D2150	65
225/70R15C	112/110R	BSW	27.5	8.9	6.0	6.5	7.0	13/32	S2470/D2335	65
185/75R16C	104/102R	BSW	27.1	7.1	5.0	5.0	6.0	12/32	S1985/D1875	69
195/60R16C	99/97T	BSW	25.4	7.8	5.5	6.0	6.5	12/32	S1710/D1610	54

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWL - Raised White Letters

VANSMART ALL SEASON // AL2 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195/65R16C	104/102T	BSW	26.1	7.8	5.5	6.0	6.0	13/32	S1985/D1875	69
195/75R16C	107/105R	BSW	27.6	7.8	5.0	5.5	6.0	12/32	S2150/D2040	69
205/60R16C	100/98T	BSW	25.9	8.1	6.0	6.0	6.5	13/32	S1765/D1655	54
205/65R16C	107/105T	BSW	26.7	8.1	5.5	6.0	6.5	12/32	S2150/D2040	69
205/75R16C	113/111R	BSW	28.3	8.0	5.5	6.0	6.5	13/32	S2535/D2405	76
215/60R16C	103/101T	BSW	26.4	8.4	6.0	6.5	6.5	13/32	S1930/D1820	54
215/65R16C	109/107T	BSW	27.2	8.6	6.0	6.5	7.0	13/32	S2270/D2150	69
215/70R16C	108/106T	BSW	28.0	8.7	5.5	6.5	7.0	13/32	S2205/D2095	54
215/75R16C	116/114R	BSW	28.8	8.5	5.5	6.0	7.0	13/32	S2755/D2600	76
225/65R16C	112/110T	BSW	27.8	8.9	6.0	6.5	7.0	13/32	S2470/D2335	69
225/75R16C	121/120R	BSW	29.4	8.9	6.0	6.0	7.0	13/32	S3195/D3085	84
235/65R16C	115/113T	BSW	28.2	9.5	6.5	7.0	7.5	12/32	S2680/D2535	69
215/60R17C	109/107H	BSW	27.3	8.5	6.0	6.5	7.0	13/32	S2270/D2150	69
225/55R17C	109/107H	BSW	27.1	9.2	6.5	7.0	7.5	12/32	S2270/D2150	69

ARCTIC TREKKER // WP-05



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
145/70R12	69T	BSW	20.1	5.7	3.5	4.5	5.0	11/32	716	44
145/70R13	71T	BSW	21.1	5.7	3.5	4.5	5.0	10/32	761	44
145/80R13	79T XL	BSW	22.2	5.8	3.5	4.0	5.0	10/32	963	50
155/65R13	73T	BSW	21.1	6.0	4.5	4.5	5.5	11/32	805	44
155/70R13	75T	BSW	21.6	6.1	4.0	4.5	5.0	10/32	853	44
155/80R13	83T XL	BSW	22.8	6.3	4.0	4.5	5.0	10/32	1074	50
175/70R13	82T	BSW	22.8	6.9	4.5	5.0	6.0	11/32	1047	44
165/70R13	83T XL	BSW	22.2	6.6	4.0	5.0	5.5	10/32	1074	50
165/80R13	87T XL	BSW	23.4	6.5	4.0	4.5	5.5	10/32	1201	50
175/65R13	80T	BSW	22.1	6.9	5.0	5.0	6.0	11/32	992	44
165/60R14	79T XL	BSW	21.9	6.6	4.5	5.0	6.0	11/32	963	50
175/65R14	82T	BSW	23.1	6.9	5.0	5.0	6.0	11/32	1047	44
185/55R14	80H	BSW	21.9	7.7	5.0	6.0	6.5	10/32	992	44
155/65R14	79T XL	BSW	22.0	6.1	4.5	4.5	5.5	10/32	963	50
165/65R14	83T XL	BSW	22.5	6.5	4.5	5.0	6.0	11/32	1074	50
195/60R14	86H	BSW	23.4	7.8	5.5	6.0	7.0	11/32	1168	44
195/65R14	93T XL	BSW	24.0	7.7	5.5	6.0	7.0	11/32	1433	50
195/50R15	86H XL	BSW	22.7	7.7	5.5	6.0	7.0	11/32	1168	50
165/60R15	81T XL	BSW	22.9	6.5	4.5	5.0	6.0	11/32	1019	50
155/60R15	74T	BSW	22.4	6.1	4.5	4.5	5.5	11/32	827	44
165/65R15	81T	BSW	23.5	6.5	4.5	5.0	6.0	11/32	1019	44

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

ARCTIC TREKKER // WP-05 continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175/60R15	81T	BSW	23.5	6.7	5.0	5.0	6.0	11/32	1019	44
175/65R15	88T XL	BSW	24.1	6.7	5.0	5.0	6.0	11/32	1235	50
145/65R15	72T	BSW	22.5	5.7	4.0	4.5	5.0	10/32	783	44
185/55R15	86H XL	BSW	23.0	7.7	5.0	6.0	6.5	10/32	1168	50
195/60R15	88T	BSW	24.3	7.8	5.5	6.0	7.0	11/32	1235	44
195/65R15	91H	BSW	25.0	7.8	5.5	6.0	7.0	11/32	1356	44
195/65R15	91T	BSW	25.0	7.8	5.5	6.0	7.0	11/32	1356	44
195/65R15	95T XL	BSW	25.1	7.8	5.5	6.0	7.0	11/32	1521	50
205/65R15	99H XL	BSW	25.4	8.1	5.5	6.0	7.5	11/32	1709	50
205/65R15	99T XL	BSW	25.4	8.1	5.5	6.0	7.5	11/32	1709	50
215/65R15	100H XL	BSW	26.0	8.5	6.0	6.5	7.5	11/32	1764	50
135/70R15	70T	BSW	22.5	5.3	4.0	4.0	4.0	10/32	739	44
185/50R16	81V	BSW	23.3	7.4	5.0	6.0	6.5	11/32	1019	44
185/55R16	87H XL	BSW	23.9	7.6	5.0	6.0	6.5	11/32	1201	50
195/45R16	84V XL	BSW	23.1	7.5	6.0	6.5	7.5	11/32	1102	50
195/50R16	88V XL	BSW	23.7	7.6	5.5	6.0	7.0	11/32	1235	50
195/55R16	87H	BSW	24.4	7.9	5.5	6.0	7.0	11/32	1201	44
205/45R16	87H XL	BSW	23.3	8.2	6.5	7.0	7.5	11/32	1201	50
205/55R16	91H	BSW	24.8	8.4	5.5	6.5	7.5	11/32	1356	44
205/55R16	91T	BSW	24.8	9.1	5.5	6.5	7.5	11/32	1356	44
205/55R16	94V XL	BSW	24.8	8.4	5.5	6.5	7.5	11/32	1477	50
215/55R16	97H XL	BSW	25.2	8.5	6.0	7.0	7.5	11/32	1609	50
225/55R16	99H XL	BSW	25.7	8.9	6.0	7.0	8.0	11/32	1709	50
205/60R16	96H XL	BSW	25.7	8.1	5.5	6.0	7.5	11/32	1565	50
215/60R16	99H XL	BSW	26.3	8.6	6.0	6.5	7.5	11/32	1709	50
225/60R16	102H XL	BSW	26.7	8.8	6.0	6.5	8.0	12/32	1874	50
205/40R17	84V XL	BSW	23.4	8.4	7.0	7.5	8.0	11/32	1102	50
205/45R17	88V XL	BSW	24.4	8.3	6.5	7.0	7.5	11/32	1235	50
205/50R17	93V XL	BSW	25.2	8.2	5.5	6.5	7.5	11/32	1433	50
205/55R17	91H	BSW	25.9	8.3	5.5	6.5	7.5	11/32	1356	44
215/40R17	87V XL	BSW	23.8	8.6	7.0	7.5	8.5	11/32	1201	50
215/45R17	91V XL	BSW	24.6	8.2	7.0	7.0	8.0	11/32	1356	50
215/50R17	95V XL	BSW	25.6	8.6	6.0	7.0	7.5	11/32	1521	50
225/45R17	94V XL	BSW	24.9	8.7	7.0	7.5	8.5	11/32	1477	50
225/50R17	98V XL	BSW	25.9	8.9	6.0	7.0	8.0	12/32	1653	50
225/55R17	101V XL	BSW	26.8	9.0	6.0	7.0	8.0	11/32	1819	50
235/45R17	97V XL	BSW	25.3	9.4	7.5	8.0	9.0	11/32	1609	50
225/40R18	92V XL	BSW	25.1	9.0	7.5	8.0	9.0	12/32	1389	50
225/60R18	104V XL	BSW	TBD	TBD	6.0	6.5	8.0	12/32	1984	50

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VANSMART SNOW // WL2



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
155R12C	88/86R	BSW	21.9	6.0	4.0	4.5	5.0	11/32	S1235/D1170	65
165R13C	91/89R	BSW	23.5	6.4	4.0	4.5	5.0	11/32	S1355/D1280	54
175R14C	99/98R	BSW	25.0	7.0	4.5	5.0	5.5	11/32	S1710/D1655	65
185R14C	102/100R	BSW	25.7	7.4	5.0	5.5	6.0	13/32	S1875/D1765	65
195R14C	106/104R	BSW	26.3	7.8	5.0	5.5	6.0	13/32	S2095/D1985	65
205R14C	109/107R	BSW	27.1	8.3	5.5	6.0	6.5	13/32	S2270/D2150	65
185R15C	103/102R	BSW	26.6	7.4	5.0	5.5	6.0	13/32	S1930/D1875	65
165/70R14	89/87R	BSW	23.0	6.6	4.5	5.0	5.0	11/32	S1280/D1200	54
175/65R14	90/88T	BSW	23.0	7.0	5.0	5.0	5.5	12/32	S1325/D1235	54
175/70R14	95/93T	BSW	23.5	6.9	4.5	5.0	5.5	11/32	S1520/D1435	54
185/75R14	102/100R	BSW	25.1	7.2	5.0	5.0	6.0	13/32	S1875/D1765	69
185/60R15	94/92T	BSW	23.9	7.2	5.5	6.0	6.0	13/32	S1475/D1390	54
195/70R15	104/102R	BSW	25.7	7.9	5.0	6.0	6.0	13/32	S1985/D1875	65
205/65R15	102/100T	BSW	25.6	8.2	5.5	6.0	6.5	13/32	S1875/D1765	54
205/70R15	106/104R	BSW	26.2	8.2	5.5	6.0	6.5	13/32	S2095/D1985	65
215/65R15	104/102T	BSW	26.1	8.7	6.0	6.5	7.0	13/32	S1985/D1875	54
215/70R15	109/107R	BSW	26.7	8.8	5.5	6.5	7.0	13/32	S2270/D2150	65
225/70R15	112/110R	BSW	27.4	9.1	6.0	6.5	7.0	13/32	S2470/D2335	65
175/75R16	101/99R	BSW	26.5	6.9	4.5	5.0	5.5	11/32	S1820/D1710	69
185/75R16	104/102R	BSW	27.1	7.1	5.0	5.0	6.0	13/32	S1985/D1875	69
195/60R16	99/97T	BSW	25.4	7.8	5.5	6.0	6.5	13/32	S1710/D1610	54
195/65R16	104/102T	BSW	26.1	7.8	5.5	6.0	6.0	13/32	S1985/D1875	69
195/75R16	107/105R	BSW	27.7	7.6	5.0	5.5	6.0	13/32	S2150/D2040	69
205/60R16	100/98T	BSW	25.9	8.0	6.0	6.0	6.5	13/32	S1765/D1655	54
205/65R16	107/105T	BSW	26.6	8.1	5.5	6.0	6.5	13/32	S2150/D2040	69
205/75R16	110/108R	BSW	28.3	7.9	5.5	5.5	6.5	13/32	S2335/D2205	69
205/75R16	113/111R	BSW	28.1	8.1	5.5	5.5	6.5	13/32	S2535/D2405	76
215/60R16	103/101T	BSW	26.4	8.5	6.0	6.5	6.5	13/32	S1930/D1820	54
215/65R16	109/107T	BSW	27.1	8.7	6.0	6.5	7.0	13/32	S2270/D2150	69
215/70R16	108/106T	BSW	27.8	8.7	5.5	6.5	7.0	13/32	S2250/D2095	54
215/75R16	113/111R	BSW	28.9	8.5	5.5	6.0	7.0	13/32	S2535/D2405	69
225/65R16	112/110R	BSW	27.6	8.9	6.0	6.5	7.0	13/32	S2470/D2335	69
225/75R16	118/116R	BSW	29.4	8.9	6.0	6.0	7.0	13/32	S2910/D2755	76
235/65R16	115/113R	BSW	28.1	9.4	6.5	7.0	7.5	13/32	S2680/D2535	69
215/60R17	109/107H	BSW	27.4	8.5	6.0	6.5	7.0	13/32	S2270/D2150	69
225/55R17	109/107H	BSW	27.0	9.2	6.5	7.0	7.5	13/32	S2270/D2150	69

PRESA // MA-SLW



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
165/70R14C	89/87Q	BSW	23.2	6.5	4.5	5.0	5.0	12/32	S1279/D1200	54
175/65R14C	90/88Q	BSW	23.0	6.9	5.0	5.0	5.5	12/32	S1323/D1235	54
205/65R15C	102/100Q	BSW	25.6	8.1	5.5	6.0	6.5	14/32	S1874/D1765	54
205/70R15C	106/104Q	BSW	26.4	8.1	5.5	6.0	6.5	14/32	S2094/D1985	65
215/70R15C	109/107Q	BSW	26.9	8.5	5.5	6.5	7.0	14/32	S2270/D2150	65
215/75R15C	106/103Q	BSW	27.7	8.5	5.5	6.0	7.0	14/32	S2094/D1930	65
225/70R15C	112/110Q	BSW	27.4	8.9	6.0	6.5	7.0	15/32	S2470/D2335	65
225/75R15C	108/104Q	BSW	28.4	8.9	6.0	6.0	7.0	14/32	S2205/D1985	65
195/60R16C	99/97Q	BSW	25.2	7.7	5.5	6.0	6.5	14/32	S1710/D1610	54
195/65R16C	104/102Q	BSW	26.1	7.7	5.5	6.0	6.0	14/32	S1985/D1875	69
195/75R16C	107/105Q	BSW	27.5	7.7	5.0	5.5	6.0	14/32	S2150/D2040	69
205/60R16C	100/98Q	BSW	25.7	8.1	6.0	6.0	6.5	14/32	S1765/D1655	54
205/65R16C	107/105Q	BSW	26.5	8.1	5.5	6.0	6.5	14/32	S2150/D2040	69
215/65R16C	109/107Q	BSW	27.0	8.5	6.0	6.5	7.0	14/32	S2265/D2145	69
215/75R16C	116/114Q	BSW	28.7	8.5	5.5	6.0	7.0	14/32	S2760/D2605	76
225/65R16C	112/110Q	BSW	27.5	8.9	6.0	6.5	7.0	14/32	S2470/D2335	69
235/65R16C	115/113Q	BSW	28.0	9.3	6.5	7.0	7.5	14/32	S2680/D2535	69
155R12C	88/86Q	BSW	21.7	6.1	4.0	4.5	5.0	12/32	S1235/D1170	65
155R13C	85/83Q	BSW	22.8	6.1	4.0	4.5	5.0	12/32	S1135/D1075	54
165R13C	94/93Q	BSW	23.5	6.5	4.0	4.5	5.0	12/32	S1475/D1435	65
175R13C	97/95Q	BSW	24.1	6.9	4.5	5.0	5.5	12/32	S1610/D1520	65
185R14C	102/100Q	BSW	25.6	7.3	5.0	5.5	6.0	14/32	S1875/D1765	65
195R14C	106/104Q	BSW	26.2	7.7	5.0	5.5	6.0	14/32	S2095/D1985	65
205R14C	109/107Q	BSW	27.0	8.1	5.5	5.5	6.5	14/32	S2270/D2150	65
205R16C	110/108Q	BSW	29.0	8.1	5.5	5.5	6.5	14/32	S2335/D2205	65

BRAVO // UE-168(N)



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
145R12C	81/79P	BSW	21.3	5.8	3.5	4.0	4.5	9/32	S1170/D1100	65
145R12C	86/84N	BSW	21.3	5.7	3.5	4.0	4.5	9/32	S1168/D1102	65
155R12C	88/86N	BSW	21.9	6.0	4.0	4.5	5.0	11/32	S1235/D1168	65
155R13C	90/88N	BSW	22.9	6.1	4.0	4.5	5.0	11/32	S1323/D1235	65
155R13C	91/89N	BSW	22.9	6.2	4.0	4.5	5.0	11/32	S1356/D1280	65
165R13C	94/93R	BSW	23.5	6.6	4.0	4.5	5.0	11/32	S1477/D1433	65
175R13C	97/95N	BSW	24.1	6.9	4.5	5.0	5.5	11/32	S1609/D1521	65
165R14C	97/95N	BSW	24.6	6.7	4.0	4.5	5.0	11/32	S1609/D1521	65
175R14C	99/98N	BSW	25.1	6.9	4.5	5.0	5.5	11/32	S1709/D1655	65
185R14C	102/100R	BSW	25.7	7.2	5.0	5.0	6.0	12/32	S1874/D1765	65

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

BRAVO // UE-168(N) continued



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
195R14C	106/104R	BSW	26.3	7.7	5.0	5.5	6.0	12/32	S2094/D1984	65
205R14C	109/107Q	BSW	27.1	8.3	5.5	6.0	6.5	12/32	S2270/D2150	65
185R15C	103/102Q	BSW	26.6	7.3	5.0	5.0	6.0	12/32	S1929/D1874	65
195R15C	106/104R	BSW	27.3	7.8	5.0	5.5	6.0	12/32	S2095/D1985	65
155/70R12C	104/102N	BSW	20.7	6.1	4.5	4.5	5.0	11/32	S1984/D1874	94
165/70R13C	88/86S	BSW	22.1	6.5	4.5	5.0	5.0	12/32	S1235/D1168	54
175/70R14C	95/93S	BSW	23.7	6.9	4.5	5.0	5.5	12/32	S1521/D1433	54
205/70R14C	102/100Q	BSW	25.4	8.3	5.5	6.0	6.5	14/32	S1874/D1764	54
215/75R14C	112/110Q	BSW	26.7	8.5	5.5	6.0	7.0	13/32	S2469/D2337	69
205/70R15C	106/104R	BSW	26.3	8.1	5.0	6.0	7.0	14/32	S2094/D1984	65
215/70R15C	109/107R	BSW	26.9	8.5	5.5	6.5	7.0	14/32	S2270/D2149	65
225/70R15C	112/110R	BSW	27.4	9.1	6.0	6.5	7.0	14/32	S2469/D2337	65
225/70R15C*	116/114Q	BSW	27.4	9.1	6.0	6.5	7.0	14/32	S2778/D2600	69
175/75R16C	101/99R	BSW	26.3	7.1	4.5	5.0	5.5	12/32	S1819/D1708	69
185/75R16C	104/102R	BSW	26.9	7.4	5.0	5.5	6.0	12/32	S1984/D1875	69
195/75R16C	107/105R	BSW	27.5	7.9	5.0	5.5	6.0	12/32	S2149/D2039	69
195/75R16C*	110/108N	BSW	27.5	7.9	5.0	5.5	6.0	12/32	S2335/D2205	76
205/75R16C	110/108R	BSW	28.1	8.1	5.5	6.0	6.5	12/32	S2337/D2205	69
205/75R16C	113/111R	BSW	28.1	8.2	5.5	6.0	6.5	12/32	S2535/D2405	76
215/65R16C	109/107Q	BSW	27.1	8.5	6.0	6.5	7.5	14/32	S2271/D2149	69
215/70R16C	108/106R	BSW	28.0	8.5	5.5	6.5	7.0	14/32	S2205/D2094	70
215/70R16C	116/114Q	BSW	28.0	8.5	5.5	6.5	7.0	14/32	S2755/D2600	76
215/75R16C	113/111R	BSW	28.7	8.8	5.5	6.0	7.0	12/32	S2535/D2381	69
215/75R16C	113/111S	BSW	28.7	8.7	5.5	6.0	7.0	12/32	S2535/D2381	69
225/75R16C	116/114Q	BSW	29.3	9.1	6.0	6.0	7.0	12/32	S2778/D2600	69
225/75R16C*	121/120R	BSW	29.3	8.9	6.0	6.0	7.0	12/32	S3195/D3085	83
LT5.00R12	83/81P 8PR	BSW	22.4	5.5	3.5	3.5	4.5	11/32	S1070/D1025	65
LT5.50R12	92/90P 10PR	BSW	23.6	6.3	4.0	3.5	5.5	11/32	S1389/D1323	73
LT5.50R13	94/92P 10PR	BSW	24.6	6.3	4.0	3.5	5.5	11/32	S1480/D1410	80
LT5.50R13	97/95P 12PR	BSW	24.7	6.4	4.0	3.5	5.5	11/32	S1610/D1520	91
LT235/75R15	110/107Q 8PR	BSW	28.9	9.6	6.0	6.5	7.0	14/32	S2337/D2150	65
LT185/75R16	100/97R 8PR	BSW	26.9	7.3	5.0	5.0	6.0	12/32	S1764/D1609	65
LT215/70R15	104/101Q 8PR	BSW	26.9	8.5	5.5	6.0	6.5	14/32	S1984/D1819	65
LT215/85R16*	115/112Q 10PR	BSW	30.4	8.8	5.5	6.0	7.0	14/32	S2680/D2470	80
LT225/70R15	106/103Q 8PR	BSW	27.4	8.9	6.0	6.5	7.0	15/32	S2094/D1929	65
LT225/75R16*	115/112Q 10PR	BSW	29.3	9.1	6.0	6.0	7.0	12/32	S2680/D2470	80
LT235/85R16*	120/116Q 10PR	BSW	31.7	9.6	6.0	6.5	7.5	15/32	S3042/D2778	80
LT245/75R16*	120/116Q 10PR	BSW	30.5	10.0	6.5	7.0	8.0	14/32	S3042/D2778	80
LT265/75R16*	123/120Q 10PR	BSW	31.7	10.8	7.0	7.5	8.0	14/32	S3415/D3085	80
LT235/80R17*	120/117Q 10PR	BSW	31.7	9.3	6.0	6.5	7.5	14/32	S3085/D2835	80
LT245/70R17	119/116Q 10PR	BSW	30.6	9.5	6.5	7.0	8.0	14/32	S3000/D2778	80

* = 3-ply sidewall

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters

VANS^{SMART} // MCV3+



Tire Size	Service Description	Sidewall	Overall Diameter (in.)	Section Width (in.)	Minimum Rim Width (in.)	Measuring Rim Width (in.)	Maximum Rim Width (in.)	Tread Depth (in.)	Max Load (lbs)	Max Infl. Pressure (psi)
175 R14C	99/98Q	BSW	25.0	6.9	4.5	5.0	5.5	13/32	S1708/D1653	65
185 R14C	102/100R	BSW	25.6	7.3	5.0	5.0	6.0	13/32	S1873/D1763	65
195 R14C	106/104R	BSW	26.2	7.7	5.0	5.5	6.0	13/32	S2094/D1984	65
205 R14C	109/107Q	BSW	27.0	8.1	5.5	6.0	6.5	13/32	S2270/D2149	65
185 R15C	103/102R	BSW	26.5	7.3	5.0	5.0	6.0	13/32	S1929/D1873	65
195/70 R15C	104/102S	BSW	25.8	7.7	5.5	6.0	6.0	13/32	S1984/D1873	65
205/65 R15C	102/100T	BSW	25.5	8.1	5.5	6.0	6.5	13/32	S1873/D1763	54
205/70 R15C	106/104R	BSW	26.3	8.1	5.5	6.0	6.5	13/32	S2094/D1984	65
215/65 R15C	104/102T	BSW	26.0	8.5	6.0	6.5	7.0	13/32	S1984/D1873	54
215/70 R15C	109/107S	BSW	26.9	8.5	5.5	6.5	7.0	13/32	S2270/D2149	65
225/70 R15C	112/110S	BSW	27.4	8.9	6.0	6.5	7.0	14/32	S2469/D2336	65
175/75 R16C	101/99R	BSW	26.3	6.9	4.5	5.0	5.5	13/32	S1818/D1708	69
185/75 R16C	104/102R	BSW	26.9	7.3	5.0	5.0	6.0	13/32	S1984/D1873	69
195/60 R16C	99/97T	BSW	25.2	7.7	5.5	6.0	6.5	13/32	S1708/D1609	54
195/65 R16C	104/102T	BSW	26.0	7.7	5.5	6.0	6.0	13/32	S1984/D1873	69
195/75 R16C	107/105S	BSW	27.5	7.7	5.0	5.5	6.0	13/32	S2149/D2039	69
205/65 R16C	107/105T	BSW	26.5	8.1	5.5	6.0	6.5	13/32	S2149/D2039	69
205/75 R16C	110/108R	BSW	28.1	8.1	5.5	5.5	6.5	13/32	S2336/D2204	69
205/75 R16C	113/111R	BSW	28.1	8.1	5.5	5.5	6.5	13/32	S2535/D2402	76
215/60 R16C	103/101T	BSW	26.1	8.5	6.0	6.5	7.0	13/32	S1929/D1818	54
215/65 R16C	109/107T	BSW	27.0	8.5	6.0	6.5	7.0	13/32	S2270/D2149	69
215/70 R16C	108/106T	BSW	27.9	8.5	5.5	6.5	7.0	13/32	S2204/D2094	54
215/75 R16C	113/111R	BSW	28.7	8.5	5.5	6.0	7.0	13/32	S2535/D2402	69
225/65 R16C	112/110T	BSW	27.5	8.9	6.0	6.5	7.0	13/32	S2469/D2336	69
225/75 R16C	121/120R	BSW	29.3	8.9	6.0	6.0	7.0	13/32	S3196/D3086	83
235/65 R16C	115/113T	BSW	28.0	9.3	6.5	7.0	7.5	13/32	S2678/D2535	69
215/60 R17C	109/107T	BSW	27.2	8.5	6.0	6.5	7.0	13/32	S2270/D2149	69
225/55 R17C	109/107H	BSW	26.8	8.9	6.5	7.0	7.5	13/32	S2270/D2149	69

XL - Extra Load; BSW - Black Sidewall; RBL - Raised Black Letters; OWL - Outlined White Letters; RWW - Raised White Wall; RWL - Raised White Letters





MAXXIS[®]
TIRES